

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







AmphenolLMD and LMS Modular Connectors

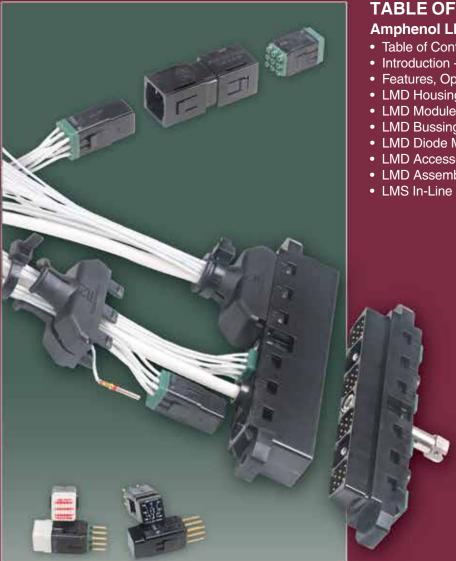


TABLE OF CONTENTS

Amphenol LMD & LMS Modular Connectors

Table of Contents99
Introduction - Features, Benefits, Performance100
Features, Options & Contact Data101
LMD Housings - How to Order102
LMD Module Contact Arrangements 103, 104
LMD Bussing Modules
LMD Diode Modules & Relay Modules106
LMD Accessories
LMD Assembly Instructions
LMS In-Line Splice Connector



LMD & LMS Typical Markets:

- Commerical Avionics
- · Avionics Instrumention

Amphenol Aerospace



Amphenol® LMD and LMS Modular Connectors for Rack & Panel or Cable Attachment

INTRODUCTION: FEATURES, BENEFITS, PERFORMANCE

| Hybrids - Fiber Optics/ | Staggered/ Hi Speed/RF/Power | GEN-X

Hybrids - Signal/Power/ | Standard Coax/Fiber Optics Brush Docking Conn./



LMD Modular Connectors

The LMD Connector Series was designed by Amphenol Pyle-National to provide flexibility in the assembly of wire harnesses that are used in instrumentation and avionic control environments. The modular design of the LMD provides rack and panel or cable to cable attachment.

Design Features of LMD Connectors

- An LMD Connector is comprised of a housing, modules and contacts - each ordered separately, requiring assembly
- Lightweight housings are offered in two materials
 - · standard black thermoplastic
 - high performance composite material for EMI shieldina
 - white thermoplastic nylon material with increased solvent resistance
- Four standard modules are available with the following contact arrangements: 1 #8, 4 #16, 9 #20,
- Modules are available in sealed and unsealed versions
- Linear module design may be used for rack and panel or cable to cable applications
- Bussing modules available to allow for a plurality of circuit network configurations without extra hardware
- Diode modules provide a current protection system for avionic instrumentation packages and eliminate the need for dedicated PC boards and other hardware
- Miniature relay modules can be added which eliminate the need for printed circuit boards and hardware



LMD Receptacle and Plug

LMD Benefits

- Reduces assembly and production costs
- Eliminates costly PC board and associated hardware
- Reduces inventory levels and associated costs
- Allows for a variety of circuit configurations
- Permits ease of circuit upgrading
- Facilitates equipment maintenance

LMD Performance Characteristics

Temperature Rating	-55° C to +140° C (-67 ° F to + 284° F)
Insulation Resistance (min.)	5000 megohms initial: 1000 megohms after 96 hours humidity
Durability	250 cycles (mating and unmating)
Vibration	Maximum discontinuity of one microsecond when subjected to sinusoidal vibration of 10 to 2000 Hz at 15 gravity units
Physical Shock	Maximum discontinuity of one microsecond when subjected to 1/2 -sine-wave transient shock of 50 gravity units with pulse duration of 11 milliseconds
Module Insertion & Removal Force	5 lbs. maximum
Module Retention	70 lbs. minimum

LMS Modular Connectors

Supplementing the LMD connector family, Amphenol/Pyle National offers the LMS in-line splice connector; a low cost interconnects that incorporates the LMD modules and contacts.


- Standard LMS splice connector 3-piece assembly with module removal tool access
- Tool-less splice connector 3-piece assembly with a push-button module release for easy module removal
- Two-piece bracket available for panel mounting
- Used in wire harness, instrument and equipment terminations and test points



LMS Tool-less Splice Connector

Amphenol Aerospace

FEATURES, OPTIONS & CONTACT DATA

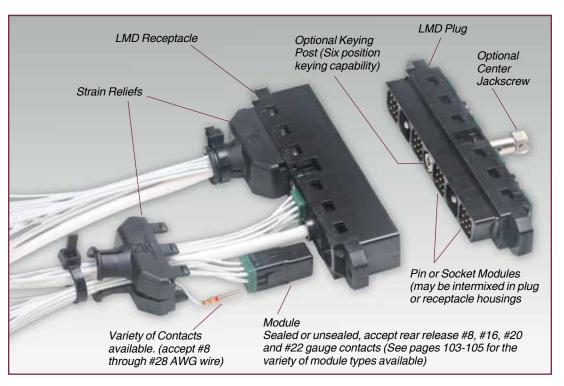

LMD Features and Options

LMD's module options provide a mix of both active and passive devices within one connector. The features and options of this series describe the design flexibility in this connector series:

- LMD Standard components are molded of a U/L rated 94VO flame retardant, light-weight thermoplastic material. Alternate white nylon material (provides resistance to industrial oils and solvents) is available; consult Amphenol Aerospace for availability.
- The linear LMD connector may be used for rack and panel or cable-to-cable applications.
- Plug and receptacle housings may be front or rear panel mounted.
- Optional keying post provides six position keying capability.
- The optional center jackscrew provides ease of mating and unmating and insures high reliability under vibration.
- Cable strain reliefs are available for internal attachment. (See page 107).
- Variety of module types. Sealed and unsealed modules accept rear release #8, #16, #20 and #22 gauge contacts. Bussing, diode and relay modules available. PC tail contacts are also available; consult Amphenol Aerospace.
- A variety of contacts accept #8 through #28 AWG wire.
 Commercially available automated crimp terminating equipment may be used.
- Wired or unwired modules are rear inserted and held by two retention tines. With the aid of a front release tool, the modules are easily removed from the rear. (See pg. 107).
- Pin or socket modules may be intermixed in plug or receptacle housings.

Contact Data

_		Contact Re	sistance	Dielectric Max.		
Contact Size	Wire Size	Test Current (amperes)	Max. Millivolts	Withstand- ing Voltage AC (RMS)	Recommended Working Voltage AC (RMS)	
22			73 54	1800	600	
20	20 7.5 24 3.0		55 45	1800	600	
16	16 20	13.0 7.5	49 46	2300	900	
8*	12 14	23 17	42 40	2300	900	
8	8 10	46 33	26 28	2300	900	

Contact Size	Wire Size	Contact Crimp Tensile Strength Lbs. Min.	Max. Wire Insulation
	28	3	
22	26	5	.054
22	24	8	.054
	22	12	
	24	8	
20	22	12	.083
	20	20	
	20	20	
16	18	30	.103
	16	50	
	14	70	
8*	12	110	.255
8	10	150	.255
°	8	220	.200

^{*} with #12 wire well

Pkg. Solutions
Brush Contac

VME 64x/

HIGh Density
HDB3 | HSB3 | Hi Speed

standard | Hybrids - Signal/Power/ |
Brush | Coax/Fiber Optics |

Docking Conn./ Brush
Accessories/Install. Ruggediz

LMD/LMS Rectangula Interconnec

Other Rectangular Interconnects



LMD HOUSINGS - HOW TO ORDER

Introduction/ Pkg. Solutions/ Brush Contact

dules) Ir staggered/ PP GEN-X B

// (Line Replaceable Mod ns/ | Hybrids - Fiber Optics/ | St nies | Hi Speed/RF/Power |

Ruggedized VME64x/ VITA 60, 66

High Densit HSB³ | HDI Hi Speed

LOW IVIALITY FORCE IVIII-D IL-50302

Docking Conn./ Hybrids - Signal/Power/ Standard ccessories/Install. Coav/Fiber Optics Brush

Rack & Panel Brush Ruggedized

LMD/LMS Rectangular Interconnects

Other Rectangular Interconnects

HOW TO ORDER LMD HOUSINGS

Housings are ordered separately from modules and contacts. Housings are available with 6 bays. Typical housing part number is shown as follows:

	1.	2.	3.	4.	5.	6.
1. Connector Type		Housing Material	Number of Modules	Connector Type	Coupling Mechanism	Alternate Keying
LMD —	LMD	-0	6	Р	J	3

2. Housing Material

0	designates standard black thermoplastic
	designates white thermoplastic nylon material - consult Amphenol for availability

3. Number of Modules

6	cavities in plug or receptacle
6	housing (available in 6 only)

4. Connector Type

Р	designates plug	
R	designates receptacle	


5. Coupling Mechanism


J	designates jack-socket, rotating
K	designates jack-screw, fixed
E	designates without coupling mechanism

6. Alternate Keying

3	6 positions of keying post: 1, 2, 3, 4, 5 or 6			
7	designates keying hardware shipped unassembled for field assembly			
8	designates no alternate keying hardware. Keyed through housing only.			

Ordering information on modules, contacts and strain reliefs is given on other pages of this LMD catalog section that follow.

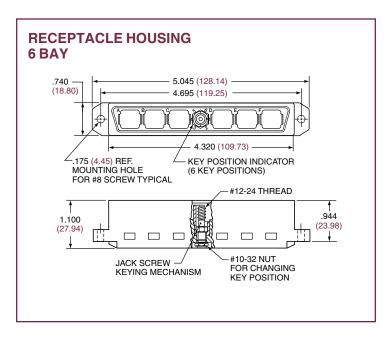

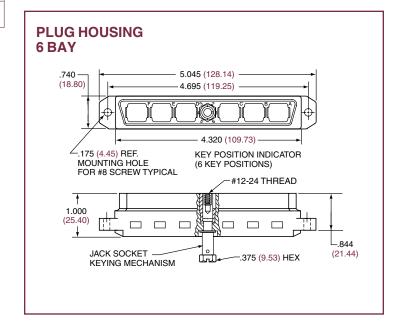


Amphenol Aerospace


MODULE CONTACT ARRANGEMENTS

Modules and contacts for LMD connectors are sold separately from housings.

Modules with 16 Size 22 Contacts

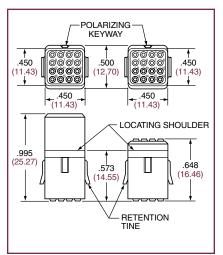


Socket Pin Module Module Part number: Part number: LMD-3003-S LMD-3003-P




Sealed Socket Sealed Pin Module Module Part number: Part number: LMD-4003-S LMD-4003-P

Pin Contact Size 22

Part number: LMD-4022-36LJ




Socket Contact Size 22 Part number: LMD-4122-96LD




Contact Finish: Gold Plated

Modules with 9 Size 20 Contacts

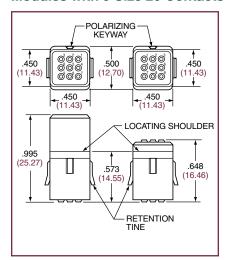

Socket Pin Module Module Part number: Part number: LMD-3001-S LMD-3001-P

Aerospace for availability of any other module materials.




Sealed Socket Sealed Pin Module Module Part number: Part number: LMD-4001-P LMD-4001-S

Pin Contact Size 20

Part number: LMD-4020-96LD

Thermocouple


Part Number: LMD-4020-10()*



Socket Contact Size 20 Part number: LMD-4120-96LD

Thermocouple

Part Number: LMD-4120-10()*



Contact Finish: Gold Plated

*Complete thermocouple part number with code letter for desired contact material as follows:

P = Chromel R = Alumel

N = Constantan

C = Copper

Module part numbers are for black thermoplastic material. Consult Amphenol

nterconnects Rectangular nterconnects Rectangular

103

Other

Staggered/ GEN-X LRM (Line Replaceable Modules) Hybrids - Fiber Optics, Hi Speed/RF/Power

Accessories

VITA 60, 66

Hi Speed

Brush Low Mating Force MIL-DTL-55302 Coax/Fiber Optics Signal/Power/

Accessories/Install

Ruggedizea Brush

LMD/LMS

MODULE CONTACT ARRANGEMENTS, CONT.

Brush Contac

GEN-X

| Hybrids - Fiber Optics/ | Staggered/ Hi Speed/RF/Power

VME64x/

Brush · Signal/Power/ Hybrids -

Rack & Panel Ruggedized Brush


Docking Conn./

nterconnects


Rectangular

Modules and contacts for LMD connectors are sold separately from housings.

Modules with 4 Size 16 Contacts

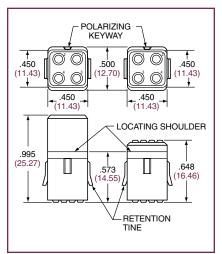

Socket Pin Module Module Part number: Part number: LMD-3005-S LMD-3005-P




Sealed Socket Sealed Pin Module Module Part number: Part number: LMD-4005-S LMD-4005-P

Pin Contact Size 16

Part number: LMD-4016-96LD

Thermocouple

Part Number: LMD-4016-10()*




Socket Contact Size 16

Part number: LMD-4116-96LD

Thermocouple

Part Number: LMD-4116-10()*



Contact Finish: Gold Plated

*Complete thermocouple part number with code letter for desired contact material as follows:


P = Chromel

R = Alumel

N = Constantan

C = Copper


Modules with 1 Size 8 Contacts

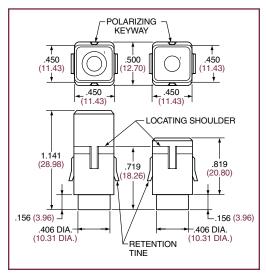


Socket Pin Module Module Part number: Part number: LMD-3004-S LMD-3004-P

Module part numbers are for black thermoplastic material. Consult Amphenol Aerospace for availability of any other module materials.

Pin Contact Size 8 Part number: LMD-4008-36L



Socket Contact Size 8 Part number: LMD-4108-36L




Contact Finish: Gold Plated

Amphenol Aerospace

BUSSING MODULES - FOR PLURAL CIRCUIT NETWORKS

Bussing Modules were designed by Amphenol Pyle-National to provide a complete terminal junction system. This module conveniently and simply allows for a plurality of circuit network configurations, eliminated the need for "pigtails", termination strips or termination hardware. Nine bussing configurations are currently available* in either a standard or sealed module. Sealed modules have a rubber interfacial seal for increased environmental resistance. LMD Bussing Modules are currently available in black thermoplastic material.**


Modules with Size 22 Contacts

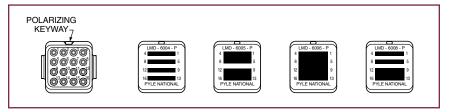

Modules with Size 20 Contacts




Modules with Size 16 Contacts

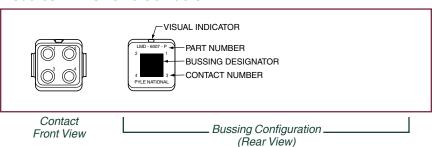

LMD Bussi Part N	Contact	Bussing	A. Ref.		
Standard Module	Sealed Module	Size	Circuits	A. Nel.	
LMD-6001-P	LMD-6101-P	20	3	1.326	
LMD-6002-P	LMD-6102-P	20	2	1.326	
LMD-6003-P	LMD-6103-P	20	1	1.326	
LMD-6004-P	LMD-6104-P	22	4	1.256	
LMD-6005-P	LMD-6105-P	22	2	1.256	
LMD-6006-P	LMD-6106-P	22	1	1.256	
LMD-6007-P	LMD-6107-P	16	1	1.326	
LMD-6008-P	LMD-6108-P	22	3	1.326	
LMD-6009-P	LMD-6109-P	20	3	1.326	

^{*} For other circuit network configurations, consult Amphenol Aerospace.



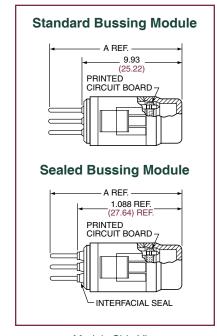

Module Side View

LRM (Line Replaceable Modules) Hi Speed/RF/Power

Accessories

VITA 60, 66

Brush Low Mating Force MIL-DTL-55302 Hybrids Coax/Fiber Optics

Accessories/Install Docking Conn./

Ruggedizea

Rectangular nterconnects Other

^{**} For availability of materials other than standard black thermoplastic, consult Amphenol Aerospace.

LMD Modular Connectors

DIODE MODULES & RELAY MODULES

Introduction/ Pkg. Solutions/ Brush Contact

Staggered/

LRM (Line Replaceable M Options/ Hybrids - Fiber Optics/ Accessories HiSpeed/RF/Power

Ruggedized VME64x / VITA 60, 66

High Densit HSB³ HD Hi Speed

> g Force MIL-DIL-55302 Hybrids - Signal/Power/ | Standard Coax/Fiber Optics | Brush


Low Mating Force M Docking Conn./ | Hybrids - Si .ccessories/Install. | Coax/Fik

Rack & Panel Brush Ruggedized

her ngular Rectang nnects Intercon

Other Rectangular Interconnects Diode Modules provide a current protection system for Avionic instrumentation packages. Module configurations represent standard system and test application requirements.* Diode Modules eliminate dedicated PC boards and other assorted hardware. These modules are available in sealed type only, incorporating an interfacial seal for environmental protection, and are manufactured of black thermoplastic material.**

Diode Modules with Size 22 Contacts

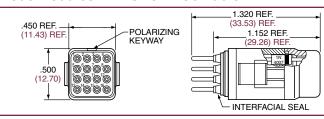








Diode Modules with Size 20 Contacts

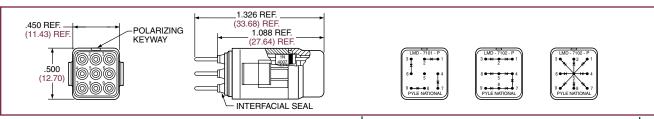

Contact Front View


Module Side View

Diode Configuration (Rear View)

LMD Diode Module Part Number	Contact Size	Circuit Description
LMD-7111-P	22	8 discrete diodes
LMD-7112-P	22	4 pair of diodes, each pair with common cathode
LMD-7113-P	22	8 diodes with common cathode (pin #1)
LMD-7101-P	20	4 discrete diodes
LMD-7102-P	20	3 pair of diodes, ear pair with common cathode
LMD-7103-P	20	8 diodes with common cathode (pin #5)

Relay Modules incorporate an industry standard miniature relay per MIL-R-39016 specification part number 39016/19-036L* These modules eliminate the need for PC boards and all related hardware. These modules are available in unsealed and sealed types as shown below, and are manufactured of black thermoplastic material.**

RELAY MODULES

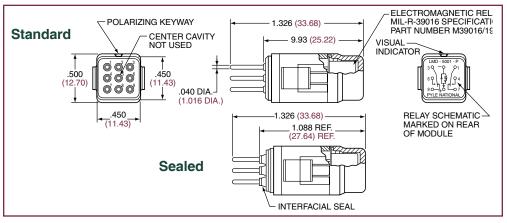

Contact Front View

Module Side View

Relay Configuration (Rear View)

- * For other circuit network configurations, consult Amphenol Aerospace.
- ** For availability of materials other than standard black thermoplastic, consult Amphenol Aerospace.



LMD Relay Module Part Number			
Standard Sealed Module Module			
LMD-5001-P	LMD-5101-P		




STRAIN RELIEFS, CRIMPING, INSERTION/REMOVAL TOOLS

Strain Relief for Internal Attachment of Wiring

Part number: LMD-5300-10A

Two-piece strain relief with cable tie included, for internal attachment to LMD 6 bay connector housings. Molded in black thermoplastic

material.

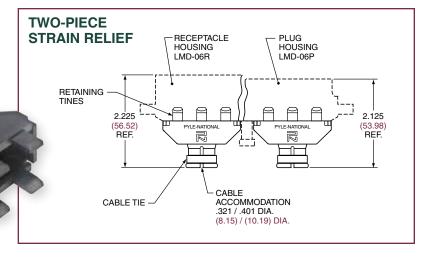

LMD TOOLS

Crimping Tool for Size 22	Crimping Tool	Positioner	
Contacts	Part Number	For Pin Contact	For Socket Contact
Amphenol/Pyle Number	TP-201401-H2	TP-201409	TP-201401-2-07
Military Number	M22520/2-01	_	M22520/2-07

Wire Size	Crimp Tool Selector Setting	
28	No. 1	
26	No. 2	
24	No. 3	
22	No. 4	

Crimping Tool		
for Size 20 & 16 Contacts	Crimping Tool Part Number	Turret Head
Amphenol/Pyle Number	TP-201354	TP-201355
Military Number	M22520/1-01	M22520/1-02

Contact Size	Wire Size	
20		
16	20 18 16	No. 4 No. 5 No. 6

Crimping Tool				
for Size 8 Contacts		Crimping Tool Part Number	Locator	
	Amphenol/Pyle Number	TP-201393	TP-201408	
	Military Number	_	_	

For S	For Size 8 Contacts		e 8 Contacts with 2 Wire Well
Wire Size	Crimp Tool Selector Setting	Wire Size	Crimp Tool Selector Setting
10	No. 5	14	No.2
8	No.7	12	No.3

Contact Insertion/Removal Tools

Contact Size	Color	Amphenol/Pyle Part Number	Military Part Number
22	Green	10-538988-22D	MIL-I-81969/14-01
20	Red	10-538988-201	MIL-I-81969/14-02
16	Blue	10-538988-016	MIL-I-81969/14-03
8	Red	TP-201406	MIL-1-81969/29-02

LMD Module Removal Tool Part number: TP-201397

See photo on page 109 of module removal with this tool.

LMD tools can be purchased from Daniels Manufacturing Company.

LRM (Line Replaceable Modules) Hi Speed/RF/Power Accessories

VITA 60, 66

Hi Speed

Brush Low Mating Force MIL-DTL-55302 | Hybrids - Signal/Power/ Coax/Fiber Optics

Accessories/Install. Docking Conn./

Ruggedizea Brush

LMD/LMS

Rectangular nterconnects Other




LMD Assembly Instructions

CRIMPING, INSERTION & REMOVAL OF CONTACTS

|Hybrids - Fiber Optics/ |Staggered/ Hi Speed/RF/Power

Amphenol recommends the tools listed on the preceding page for use with LMD connectors, and also the following procedures for wire preparation, crimping of wire and contact insertion and removal.

Wire Preparation



Strip wires to dimension "A" shown in table at right. Avoid cutting or nicking wire strands.

Contact Size	Wire Size	Max. O. D. Insulation	Stripping Length Dimension "A"
22	20-24-26-28 AWG	.054	.156 – .125
20	20-22-24 AWG	.083	.185 – .155
16	16-18-20 AWG	.103	.260 – .230
8 (with #12 crimp)	12-14 AWG	.255	.395 – .365
8	8-10 AWG	.255	.395 – .365

Crimping Wire to Contacts

Follow steps 1-3 for proper contact crimping.



1. Fully insert wire into contact crimp pocket. Wire must be visible through wire inspection hole.



- 2. Insert contact into tool (use proper crimping tool as listed on preceding page). Crimp contact to wire. Tool will not open if contact is not fully crimped.
- 3. After crimping, wire should be visible through wire inspection hole.

Contact Insertion



Using proper insertion/removal tool as listed on previous page, slip wire into insertion end (colored end), placing crimp end of contact inside the slotted portion and contact shoulder against end of tool.



Align contact with the cavity at the rear face of the module. Carefully push the contact into the full depth of the cavity. Withdraw tool. A slight axial pull on the wire will confirm contact is locked in proper position.

Contact Removal



Snap the extraction end (white end) of the tool over the wire of the contact selected for removal. Carefully push the tool into the full depth of the contact cavity releasing the contact retaining collet. Hold the wire against the serrations on the tool, and withdraw the tool and the wired contact from the module.

LMD Assembly Instructions



MODULE INSERTION/REMOVAL & USE OF STRAIN RELIEF

Pin or socket modules, wired or unwired, can be inserted or intermixed in plug or receptacle housings. Select from standard module configurations shown on pages 103 & 104, or select the optional bussing, diode or relay modules offered, shown on pages 105 & 106. The next instructions illustrate the proper method of insertion and removal of modules within the LMD connector.

Module Insertion



Align the module with the proper cavity at the rear of the housing. The module keyway must be positioned to accept key in housing cavity. Carefully insert the module straight in to the cavity until fully seated and locked in place. A slight axial push on the front of the module or a pull on the cable bundle will confirm module is locked in proper position.



Select module to be removed and place the blades of removal tool into the removal slots at the front of the connector. Push the removal tool into the full depth of the cavity, releasing the module retention tines.



With the module removal tool fully inserted, push the extraction plunger to eject the module out of the rear of the connector.

Module Removal

Accessories

Hi Speed/RF/Power

Brush

Low Mating Force MIL-DTL-55302 Coax/Fiber Optics

Accessories/Install

Assembly of Internal Strain Relief

Strain reliefs, if required, may be assembled to plug or receptacle connectors which have a full complement of modules installed. The following is instruction for assembling the internal attachment strain relief, part number LMD-5300-10A (see page 107).



Tape wire bundle in area of cable clamp, and build up diameter to approx. 3/8 inches, if required. Align self-locking tines of the strain relief housing with the cavities adjacent to each module. Push the strain relief housing into place until the self-locking tines snap and lock strain relief into position. Assemble opposite half of strain relief housing to connector and tighten tie-strap to provide clamping force on the wire bundle.

Opening Strain Relief to Service Modules and Contacts

Internal attachment strain reliefs may be opened to provide module and/or contact accessibility. To service connectors, first cut and discard tie-strap on strain relief. Open strain relief halves approx. 45° each by bending along integral flexible hinge. After servicing, close strain relief halves and install and tighten new tie-strap.

To completely remove strain relief from the housing in order to provide module access; first remove tie-strap, open strain relief halves 45° each, then remove module, then remove strain relief.





SIMPLE, LOW COST INTERCONNECTION DEVICE

| Hybrids - Fiber Optics/ | Staggered/

Hybrids - Signal/Power/ | Standard Docking Conn./

Rectangular

LMS Modular Connectors


Amphenol's LMS in-line splice connector incorporates LMD modules and contacts. The LMS is a simple, compact, three-piece assembly which is used in the following applications:

- Instrument terminations
- Equipment terminations
- Wire harness terminations
- Test points


The LMS double-ended tool-less splice (part number LMS-01T-TL) incorporated an integral release mechanism for easy tool-less module removal. It is manufactured of black thermoplastic material* and is temperature rated at -55° C to $+140^{\circ}$ C (-67° F to $+284^{\circ}$ F).

The LMS connector uses the same standard modules, bussing modules, diode modules and/or relay modules as the LMD assemblies (see pages 103-105 for module and contact availability.


For availability of materials other than standard black thermoplastic, consult Amphenol Aerospace.

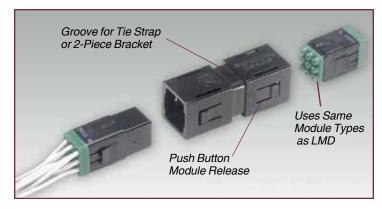

LMS Double-Ended **In-Line Splice Housing** Part Number: LMS-01T-TL

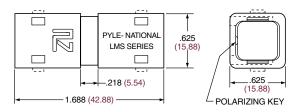

LMS Two-Piece Bracket for Panel Mounting

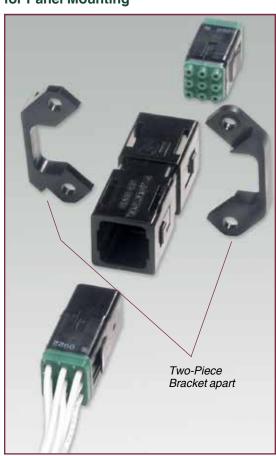



LMS Panel Mounting Bracket Part Number: LMS-B1-01

