

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









#### PANELITE ENCLOSURE LIGHTS



#### INDUSTRY STANDARDS

#### **PANELITE LED and Fluorescent Enclosure Lights**

UL 508A Component Recognized; File No. E61997 cUL Component Recognized per CSA C22.2 No 14; File No. E61997

CSA File No. 42186

Maintains UL/CSA Type 4, 4X and 12 enclosure rating when properly installed in a Hoffman enclosure.

#### 230 VAC Fluorescent Enclosure Light

UL 508A Component Recognized; File No. E234324 cUL Component Recognized per CSA C22.2 No 14; File No. E61997

CE

# **LED Light**

UL 508A Component Recognized; File No. E234324 cUL Component Recognized per CSA C22.2 No 14; File No. E234324

CE

Ingress protection: IP 20

Maintain's enclosure type rating up to 4X when installed per instructions

# **APPLICATION**

Versatile, slim-profile LED and fluorescent lights provide mounting flexibility and are easy to install in any enclosure. Terminal blocks allow for easy wiring. Accessories include ganging cables, power cords and door switches, all provided with plug-and-play connectors for easy connection to the terminal blocks with an innovative terminal connection system. LED version provides superior lighting performance with minimal power consumption.

#### **FEATURES**

- Slim profile allows light to be tucked out of the way for easy panel installation
- Versatile mounting allows the light to be positioned horizontally or vertically; two-way mounting provides for ideal orientation
- Includes mounting hardware for the following enclosure installations: PROLINE Frame, Enclosure Top, Panel Mount and Unistrut
- On/off switch incorporated in light; optional remote door switch accessory available to activate light when enclosure door is opened (230 VAC Fluorescent Enclosure Light has switch or dooractivated sensor)

#### **PANELITE Only:**

- Mounting tabs provide easy access point for attachment hardware; light does not need to be disassembled for installation
- · Up to five lights can be daisy-chained together
- Plug-and-play terminal connection system:
  - Pre-wired connection sockets on both ends of light allow use of Hoffman cable accessories
  - Optional terminal blocks snap into the connection sockets, allowing customers to use their own wiring methods; two terminal blocks provided with each light kit
  - Power supply can be wired manually with Hoffman PANELITE Power Cable with Leads or with Hoffman optional PANELITE Power Cord
  - Ganging cables are available in 2-, 4- and 6-ft. lengths to easily join up to five lights together using one power supply
  - Remote door switch for easy door activation eliminates need to mount light in the exact location required to activate the light

#### **LED Light Only:**

- Mechanical screw- or magnetic mount (non-slip rubberized)
- Protection Class II (double insulated)
- Operating temperature -22 F to 140 F (-30 C to 60 C)
- On / Off or motion-sensor activation
- · LED lights with 400 LM illumination; 120° angle of illumination
- · Low, 5-watt power requirement
- · Light-weight, all-composite construction
- Input and output connectors included with light (16 AWG)

# **SPECIFICATIONS**

# **PANELITE:**

- · Extruded aluminum center support
- Black composite end caps
- Black composite mounting tabs
- Each light fixture includes two mounting tabs, two pre-wired connection sockets, two optional terminal blocks that snap into the connection sockets and enclosure attachment hardware (bulb not included with fluorescent light)

# 230 VAC Fluorescent Enclosure Light:

- Light gray composite construction UL 94V-0 material
- Hardware kit provides fasteners to mount to PROLINE, NEMA (4, 4X, 12, and 13), CONCEPT, FUSION and other cabinets
- Easy-access terminal block that accommodates up to 16 AWG wires
- Fluorescent light bulb included (2G7 Base)

#### LED Light:

- LED (Light Emitting Diode) low-power light kit
- Screw mounting using included hardware kit (maintains enclosure rating up to UL Type 4X)
- · No user-serviceable parts
- Life expectancy of 60,000 hours at 68 F (20 C) under specifications
- Operating temperature: -22 to +140 F (-30 to +60 C) under specifications
- 5-watt power consumption
- Transparent, composite construction



# **PANELITE LED ENCLOSURE LIGHT**



- 24 VDC operation for superior lighting performance with minimal power consumption
- 140-degree cone angle casts a broad covering of neutral light between 3500 and 4500K color temperature
- Center section rotates 120 degrees to redirect light where needed
- Long life; 70 percent of initial luminance at 50,000 hours (at 25 C)
- High power LED emitters produce 470 Lumens for superior lighting performance
- Can be wired using optional
  PANELITE Cable Accessories or
  can be hard-wired with terminal
  blocks included in hardware kit
- Up to five lights can be daisychained together using hard-wired connection to power supply or catalog number LPC72 power cable with leads

**BULLETIN: A80LT** 

Catalog Number	Description	VDC	Amps	W in./mm	X in./mm
LED24V15	LED Light, 15 in.	24	.5	15.00 381	8.00 203
1.47 37 mm		15.00 381 mm 8.00 203 mm	9=		
•	1.25 32 mm		<u> </u>	1.79 45 mm	9045043

Catalog Number	Description
LED24VHDWK	Replacement hardware kit for PANELITE Enclosure Lights

W

Χ

[70]

==

581

1.25

[32]

705

# REPLACEMENT HARDWARE KIT FOR PANELITE LED AND FLUORESCENT ENCLOSURE LIGHT


Relacement hardware kit is available for the replacement of lost or damaged hardware supplied with the PANELITE LED or Fluorescent Lights. Kit includes mounting brackets and all mounting hardware.

**BULLETIN: A80LT** 

# PANELITE FLUORESCENT ENCLOSURE LIGHT



- · 120 VAC, 50/60 Hz operation
- Can be wired using optional PANELITE Cable Accessories or can be hard-wired with terminal blocks included in hardware kit
- Available in 15-, 18- and 28-in. lengths with ability to daisy chain up to five lights together using one power supply
- · Fluorescent bulb not included





# **PANELITE POWER CORDS**



- Connects light to standard North American wall socket
- LF120VCORD is for 120 VAC
   Fluorescent lights (up to five lights can be daisy chained together using one power cord)
  LED24VCORD is for 24 VDC LED
- LED24VCORD is for 24 VDC LED lights and includes a transformer to convert 100-240 VAC power supply (capable of powering only one LED light)
  Plugs directly into a connection
- Plugs directly into a connection socket on switch end of the light
   Includes one cable

Power cord not required. Terminal blocks are provided with each light for wired connection to electric supply.

**BULLETIN: A80LT** 

Catalog Number	Description	Length
LF120VCORD	Fluorescent Light Power Cord	72 in.
LED24VCORD	LED Light Power Cord	60 in.

# PANELITE POWER CABLE WITH LEADS



- 72-in. power cord provides convenient connection to an electrical supply
- electrical supplyEliminates need to run and tag individual wires into the light
- Compatible with PANELITE LED and Fluorescent lights
- Plugs directly into connection socket on switch end of the light
- Includes one 16 AWG cable, black Power Cable not required. Terminal blocks are provided with each light for wired connection to electric supply.

**BULLETIN: A80LT** 

Catalog Number	Length
LPC72	72 in.

# **PANELITE GANGING CABLES**



- Ganging Cables provide convenient method for joining up to five lights together while utilizing one power supply
   Available in 24-, 48- and 72-in.
- Available in 24-, 48- and 72-in lengths
- Plugs directly into connection socket on either end of the light
- Compatible with PANELITE LED and Fluorescent lights
- Includes one 16 AWG cable, black Ganging Cables not required.
   Terminal blocks are provided with each light for hard-wired connections.

**BULLETIN: A80LT** 

Catalog Number	Length
LGCABLE24	24 in.
LGCABLE48	48 in.
LGCABLE72	72 in.

#### PANELITE DOOR SWITCH CABLE



- Easily connects PANELITE LED or Fluorescent Light to a Remote Door Switch
- T-connector allows the Door Switch Cable to be connected with a ganging cable or power supply to the switch end of the light
- · Available in 18- and 72-in. lengths
- Includes one 18 AWG cable, black Door Switch Cables not required.
   Terminal blocks are provided with each light for hard-wired connection to remote door switch.


**BULLETIN: A80LT** 

Catalog Number	Length
LDSWITCH18	18 in.
LDSWITCH72	72 in.



# **PANELITE WIRING OPTIONS**


See the table on the drawing for cable clearance dimensions.




ITEM	CONNECTOR TYPE	LIGHT FIXTURE
А	LDSWITCH18 LDSWITCH72	LF120V15 LF120V18 LF120V28 LED24V15
В	LF120VCORD LPC72	LF120V15 LF120V18 LF120V28
	LED24VCORD	LED24V15
С	LGCABLE24 LGCABLE48 LGCABLE72	LF120V15 LF120V18 LF120V28 LED24V15

PLUG	DIMENSION	'D' M <b>I</b> N
A + B	D1	127 MM 5.00 <b>I</b> N
C	D2	51 MM 2.00 <b>I</b> N
A + C	D3	127 MM 5.00 <b>I</b> N

Option 1: Each light is controlled by a remote door switch.



Option 2: All lights are controlled by a single remote door switch.



Option 3: The last light is controlled by a remote door switch. The first two lights are manually operated.


89046495

# 230 VAC FLUORESCENT ENCLOSURE LIGHT



- 230 VAC, 50/60 Hz operation with electronic ballast
- Compact light-gray plastic housing, UL 94V-0
- Easy access to wiring terminals, integral strain relief, 16 AWG max. Versatile mounting to many enclosure
- types Complete assembly, long-life fluorescent bulb included, Luminosity
- 900 LM Switch and Door motion sensor offering

**BULLETIN: A80LT** 



nVent.com/HOFFMAN PH 763.422.2211 **ACCESSORIES** Spec-00581 0




# **LED LIGHT KIT**



LED light kits provide interior enclosure lighting. These light kits are ideal for remote and darkened enclosure applications. The light can be mechanically fastened with included hardware to maintain enclosure UL listing (up to Type 4X), or can be magnetically attached to flat steel surfaces. The lights have auto-sensing circuitry (AC voltage 90 VAC to 265 VAC and DC voltage 20 VDC to 60 VDC). LED lights are light-weight and in a small form factor while providing 400 LM of 6000-7000K light. Power consumption for all models is 5 watts.

# **BULLETIN: A80LT**



				Mounting			
Catalog Number	AxBxC in./mm	Weight (oz)	Weight (gm)	Style	Power Source	Activation	Voltage
LEDA1M35	1.34 x 1.26 x 13.82 34 x 32 x 351	4.8	135	Magnetic	AC	On/off switch	90 VAC-265 VAC
LEDA2M35	1.54 x 1.26 x 13.82 39 x 32 x 351	5.0	140	Magnetic	AC	IR Motion Sensor	90 VAC-265 VAC
LEDA1S35	1.42 x 2.05 x 13.82 36 x 52 x 351	4.8	135	Screw	AC	On/off switch	90 VAC-265 VAC
LEDA2S35	1.63 x 2.05 x 13.82 41 x 52 x 351	5.0	140	Screw	AC	IR Motion Sensor	90 VAC-265 VAC
LEDD1M35	1.34 x 1.26 x 13.82 34 x 32 x 351	4.8	135	Magnetic	DC	On/off switch	20 VDC-60 VDC
LEDD2M35	1.54 x 1.26 x 13.82 39 x 32 x 351	5.0	140	Magnetic	DC	IR Motion Sensor	20 VDC-60 VDC
LEDD1S35	1.42 x 2.05 x 13.82 36 x 52 x 351	4.8	135	Screw	DC	On/off switch	20 VDC-60 VDC
LEDD2S35	1.63 x 2.05 x 13.82	5.0	140	Screw	DC	IR Motion Sensor	20 VDC-60 VDC

# LED LIGHT INPUT CONNECTOR/CABLE ASSEMBLY



The input connector/cable assembly is used to provide supply power to the LED light. Preassembled connector/cable assembly

with 78.7-in. (2000 mm) long cable whip. Cables are constructed of 16 AWG copper wire.

#### **BULLETIN: A80LT**

Catalog Number	A in./mm	Power Source	Use with
LEDA20C	78.74	AC	AC LED Lights
	2000		
LEDD20C	78.74	DC	DC LED Lights
	2000		

# LED LIGHT EXTENSION CONNECTOR/CABLE ASSEMBLY



The extension connector/cable assembly is used to connect adjacent LED lights (daisy chain). Up to 10 LED lights can be ganged or connected in series. Pre-assembled connector/cable assembly with 39.4-in. (1000 mm) long cable between input and output connectors. Cables are constructed of 16 AWG copper wire.

# **BULLETIN: A80LT**

Catalog Number	A in./mm	Power Source	Use with
LEDA10E	39.37 1000	AC	AC LED Lights
LEDD10E	39.37 1000	DC	DC LED Lights

5 ACCESSORIES Spec-00581 0 SUBJECT TO CHANGE WITHOUT NOTICE nVent.com/HOFFMAN



# **REMOTE DOOR SWITCHES**



- The remote door switch can activate a light or other electrical component when the enclosure door is opened
- Mounts on enclosure frame and includes mounting hardware
- Mounting plate is 14 gauge steel with a plated finish
- Can be hard-wired to the PANELITE LED or Fluorescent light or connected via the PANELITE Door Switch Cable

**BULLETIN: A80LT, P20** 

Catalog Number	Description
ALFSWD	Door switch assembly (order connection cable separately)
PLFSWD	Door switch assembly for PROLINE and PROLINE G2
	(order connection cable separately)

# **TOUCH-SAFE UL LIGHT SWITCH**



# **APPLICATION**

The Touch-Safe light switch is designed to be used with Hoffman light kits (AC and DC). It provides a UL listed touch-safe switch that can be used on many enclosure types and includes hardware for most applications. The light switch maintains enclosure overall rating up to UL 508A Type 4X or 12.

#### **FEATURES**

- · UL listed for a touch-safe wire connection
- Easily mounted to various enclosure types; common bracket and hardware included for many enclosure types (NEMA, CONCEPT/ FUSION G7, PROLINE, Free-Stand Type 12)
- · Cable PG compression hub
- Wide operating temperature range: -49°F to +158°F (-45°C to 70°C)
- · Rugged die-cast anodized zinc construction
- Connection 3 cage clamps for solid and stranded wire AWG 20-14 (0.5-2.5mm²)
- Protection class I (grounded)

### **BULLETIN: A80LT**

Catalog Number	Max. Cable Dia.	Max. Voltage
LDSWITCH	.375 in.	250 AC / 48 DC

#### MOUNTING BRACKET KIT FOR LIGHT PACKAGE



Kit simplifies mounting light package in Hoffman PROLINE disconnect enclosures. Includes brackets, all mounting hardware and complete instructions.

#### **BULLETIN: A80LT**


Catalog Number	Description	
PDLFBRKT	Mounting Bracket Kit	Ī

# **LED PUCK LIGHT**



The LED Puck Light is ideal for remote and darkened applications. This versatile light provides mounting flexibility; it can be magnetically attached to flat steel surfaces or can be hung with a swivel hook. This small form factor, light-weight LED light provides superior lighting performance with minimal power consumption. It can be used as a three-LED flashlight or as a Chip on Board (COB) work light with operating temperature of 40 F to 120 F (4 C to 48 C). An on/ off switch is incorporated in the light and three AAA batteries are included.

**BULLETIN: A80LT** 

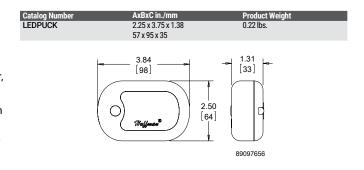

nVent.com/HOFFMAN PH 763.422.2211 Spec-00581 0 ACCESSORIES 6