# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






# LQA30T150C, LQA30B150C Qspeed<sup>™</sup> Family

150 V, 30 A Common-Cathode Diode

# **Product Summary**

I <sub>F(AVG)</sub> per diode	15	А
V <sub>RRM</sub>	150	V
Q <sub>RR</sub> (Typ at 125 °C)	31.5	nC
I <sub>RRM</sub> (Typ at 125 °C)	1.82	А
Softness t <sub>b</sub> /t <sub>a</sub> (Typ at 125 °C)	0.55	

# Pin Assignment

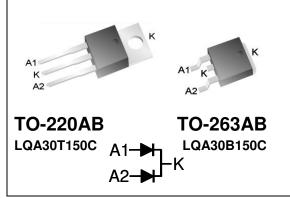

### **RoHS** Compliant

Package uses Lead-free plating and "Green" mold compound Halogen free per IEC 61249-2-21.

# **Absolute Maximum Ratings**

# **General Description**

This device has the lowest  $Q_{\text{RR}}$  of any 150 V Silicon diode. Its recovery characteristics increase efficiency, reduce EMI and eliminate snubbers.

# **Applications**

- AC/DC and DC/DC output rectification
  - Output and freewheeling diodes
- Motor drive circuits
- DC-AC inverters

### Features

- Low  $Q_{RR}$ , Low  $I_{RRM}$ , Low  $t_{RR}$
- High dl<sub>F</sub>/dt capable
- Soft recovery

# **Benefits**

- Increases efficiency
  - · Eliminates need for snubber circuits
  - Reduces EMI filter component size and count
- Enables extremely fast switching

Absolute maximum ratings are the values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Symbol	Parameter	Conditions	Rating	Units
V <sub>RRM</sub>	Peak repetitive reverse voltage	T <sub>J</sub> = 25 °C	150	V
I <sub>F(AVG)</sub>	Average forward current	Per Diode, $T_J = 150 \text{ °C}$ , $T_C = 120 \text{ °C}$	15	Α
		Per Device, $T_J = 150 \text{ °C}$ , $T_C = 120 \text{ °C}$	30	Α
I <sub>FSM</sub>	Non-repetitive peak surge current	Per Diode, 60 Hz, 1/2 cycle	130	Α
I <sub>FSM</sub>	Non-repetitive peak surge current	Per Diode, $\frac{1}{2}$ cycle of t = 28 $\mu$ s Sinusoid, T <sub>C</sub> = 25 °C	350	А
TJ	Operating junction temperature range		-55 to 150	°C
T <sub>STG</sub>	Storage temperature		-55 to 150	°C
	Lead soldering temperature	Leads at 1.6 mm from case, 10 sec	300	°C
PD	Power dissipation	$T_{\rm C} = 25 \ ^{\circ}{\rm C}$	56.8	W


# **Thermal Resistance**

Symbol	Resistance from:	Conditions	Rating	Units
$R_{ heta JA}$	Junction to ambient	TO-220AB (only)	62	°C/W
$R_{ ext{ heta}JC}$	Junction to case	Per Diode	2.2	°C/W
	Sunction to case	Per Device	1.1	°C/W

		-	,		•	,	
Symbol	Parameter	Conditions		Min	Тур	Мах	Units
DC Chara	acteristics per diode						
I <sub>R</sub>	Reverse current per diode	$V_{R} = 150 V, T_{J} =$	25 °C	-	-	500	μA
		$V_{R} = 150 V, T_{J} =$	125 °C	-	0.27	-	mA
VF	Forward voltage per diode	I <sub>F</sub> = 15 A, T <sub>J</sub> = 25	5 °C	-	0.98	1.2	V
		$I_F = 15 \text{ A},  \text{T}_\text{J} = 15$	50 °C	-	0.86	-	V
CJ	Junction capacitance per diode	V <sub>R</sub> = 10 V, 1 MHz		-	54	-	pF
Dynamic	Characteristics per diod	9					
t <sub>RR</sub>	per diode V <sub>R</sub> = 100	dl <sub>F</sub> /dt = 100 A/µs	T <sub>J</sub> = 25 °C	-	16.3	-	ns
		V <sub>R</sub> = 100 V, I <sub>F</sub> = 15 A	T <sub>J</sub> = 125 °C	-	28.7	-	ns
Q <sub>RR</sub>	Reverse recovery charge,	dl <sub>F</sub> /dt = 100 A/µs	T <sub>J</sub> = 25 °C	-	10.3	25.0	nC
	per diode	V <sub>R</sub> = 100 V, I <sub>F</sub> = 15 A	T <sub>J</sub> = 125 °C	-	31.5	-	nC
I <sub>RRM</sub>	Maximum reverse	dI <sub>F</sub> /dt = 100 A/µs	T <sub>J</sub> = 25 °C	-	1.02	2.32	А
recovery current, per diode	V <sub>R</sub> = 100 V, I <sub>F</sub> = 15 A	T <sub>J</sub> = 125 °C	-	1.82	-	A	
S	a í th	dl <sub>F</sub> /dt = 100 A/µs	T <sub>J</sub> = 25 °C	-	0.63	-	
	Softness per diode = $\frac{t_b}{t_a}$ $\begin{cases} dI_F/dt = 100 \text{ A}/\mu\text{s} \\ V_R = 100 \text{ V}, \\ I_F = 15 \text{ A} \end{cases}$	T <sub>J</sub> = 125 °C	-	0.55	-		

# Electrical Specifications at T<sub>J</sub> = 25 °C (unless otherwise specified)

<u>Note to component engineers</u>: Q-Series diodes employ Schottky technologies in their design and construction. Therefore, component engineers should plan their test setups to be similar to traditional Schottky test setups. (For further details, see application note AN-300.)

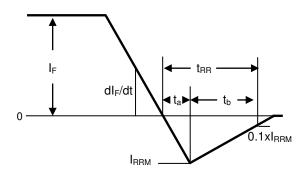




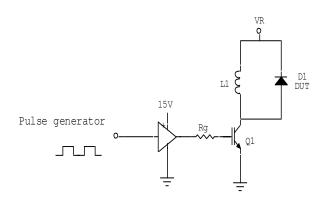


Figure 2. Reverse Recovery Test Circuit






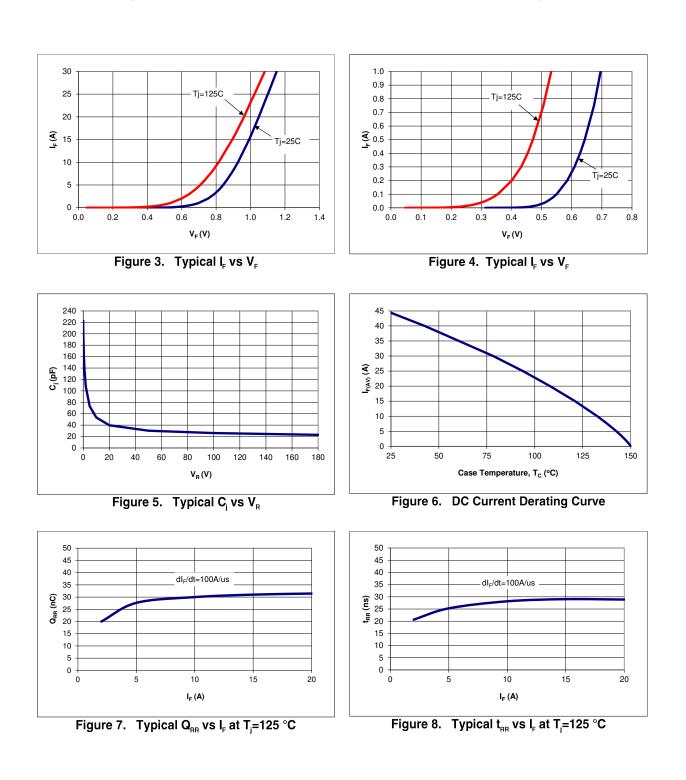


# Electrical Specifications at T<sub>J</sub> = 25 °C (unless otherwise specified)



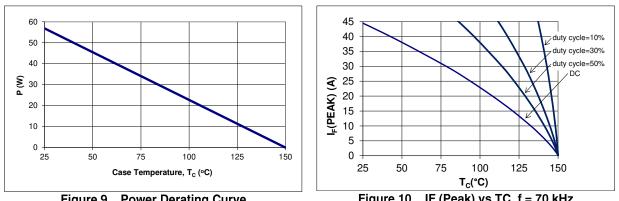





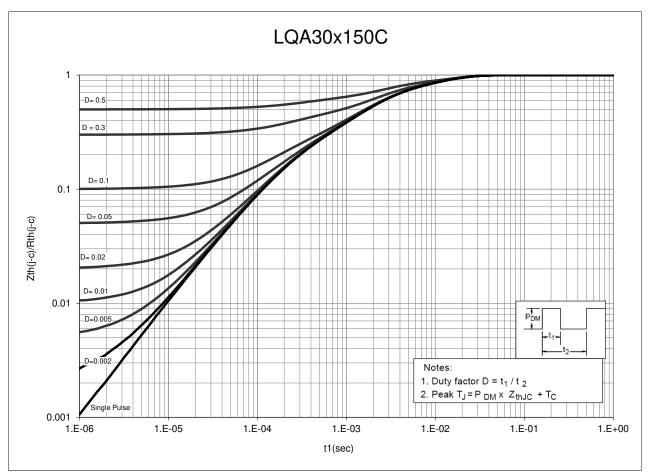



Figure 11. Normalized Maximum Transient Thermal Impedance





# Dimensional Outline Drawings


TO-220AB

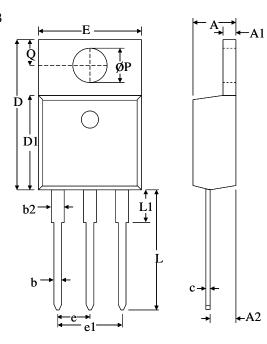

	Millimeters			
Dim	MIN	МАХ		
Α	4.32	4.70		
A1	1.11	1.38		
A2	2.59	2.79		
b	0.77	1.00		
b2	1.23	1.36		
С	0.34	0.47		
D	14.71	15.75		
D1	9.05	9.25		
Е	9.96	10.36		
е	2.44	2.64		
e1	4.98	5.18		
L	12.70	14.22		
L1	-	3.90		
ØP	3.71	3.96		
Q	2.54	2.90		

Mechanical Mounting Method	Maximum Torque / Pressure specification
Screw through hole in package tab	1 Newton Meter (nm) or 8.8 inch-pounds (lb-in)
Clamp against package body	12.3 kilogram-force per square centimeter (kgf/cm <sup>2</sup> ) or 175 lbf/in <sup>2</sup>

TO-263AB

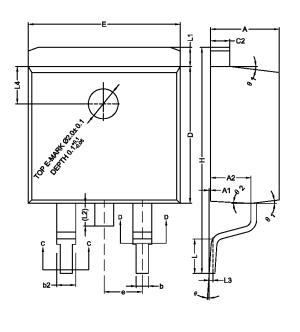

	Millimeters		
Dim	n MIN MAX		
Α	4.40	4.70	
A1	0.00	0.25	
A2	2.59	2.79	
b	0.77	0.90	
b2	1.23	1.36	
c2	1.22	1.32	
D	9.05	9.25	
Е	10.06	10.26	
е	2.54 BSC	2.54 BSC	
Н	14.70	15.50	
L	2.00	2.60	
L1	1.17	1.40	
L2	-	1.75	
L3	0.25 BSC	0.25 BSC	
L4	2.00 BSC	2.00 BSC	
Θ	0°	8°	
Θ1	5°	9°	
Θ2	1°	5°	



**Soldering time and temperature:** This product has been designed for use with high-temperature, lead-free solder. The component leads can be subjected to a maximum temperature of 300 °C, for up to 10 seconds. See Application Note AN-303, for more details.

### **Ordering Information**

Part Number	Package	Packing
LQA30T150C	TO-220AB	50 units/tube
LQA30B150C	TO-263AB	800 units/reel

The information contained in this document is subject to change without notice





Revision	Notes	Date
1.0	Initial Release	12/14





#### For the latest updates, visit our website: www.power.com

Power Integrations reserves the right to make changes to its products at any time to improve reliability or manufacturability. Power Integrations does not assume any liability arising from the use of any device or circuit described herein. POWER INTEGRATIONS MAKES NO WARRANTY HEREIN AND SPECIFICALLY DISCLAIMS ALL WARRANTIES INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY RIGHTS.

#### PATENT INFORMATION

The products and applications illustrated herein (including transformer construction and circuits' external to the products) may be covered by one or more U.S. and foreign patents, or potentially by pending U.S. and foreign patent applications assigned to Power Integrations. A complete list of Power Integrations' patents may be found at <u>www.power.com</u>. Power Integrations grants its customers a license under certain patent rights as set forth at http://www.power.com/ip.htm.

The PI Logo, TOPSwitch, TinySwitch, LinkSwitch, LYTSwitch, InnoSwitch, DPA-Switch, PeakSwitch, CAPZero, SENZero, LinkZero, HiperPFS, HiperTFS, HiperLCS, Qspeed, EcoSmart, Clampless, E-Shield, Filterfuse, FluxLink, StackFET, PI Expert and PI FACTS are trademarks of Power Integrations, Inc. Other trademarks are property of their respective companies. ©Copyright 2014 Power Integrations, Inc.

#### **Power Integrations Worldwide Sales Support Locations**

#### WORLD HEADQUARTERS

5245 Hellyer Avenue San Jose, CA 95138, USA. Main: +1-408-414-9200 Customer Service: Phone: +1-408-414-9665 Fax: +1-408-414-9765 e-mail: usasales@powerint.com

#### CHINA (SHANGHAI)

Rm 2410, Charity Plaza, No. 88, North Caoxi Road, Shanghai, PRC 200030 Phone: +86-21-6354-6323 Fax: +86-21-6354-6325

#### e-mail<u>:</u> chinasales@powerint.com

#### CHINA (SHENZHEN)

17/F, Hivac Building, No. 2, Keji Nan 8th Road, Nanshan District, Shenzhen, China, 518057 Phone: +86-755-8672-8689 Fax: +86-755-8672-8690 e-mail: chinasales@powerint.com

#### GERMANY

Lindwurmstrasse 114 80337, Munich Germany Phone: +49-895-527-39110 Fax: +49-895-527-39200 e-mail: eurosales@powerint.com

#### INDIA

#1, 14<sup>th</sup> Main Road Vasanthanagar Bangalore-560052 India Phone: +91-80-4113-8020 Fax: +91-80-4113-8023 e-mail: indiasales@powerint.com

#### ITALY

Via Milanese 20, 3<sup>rd</sup>. Fl. 20099 Sesto San Giovanni (MI) Italy Phone: +39-024-550-8701 Fax: +39-028-928-6009 e-mail: eurosales@powerint.com

#### JAPAN

Kosei Dai-3 Building 2-12-11, Shin-Yokohama, Kohoku-ku, Yokohama-shi, Kanagawa 222-0033 Japan Phone: +81-45-471-1021 Fax: +81-45-471-3717 e-mail: japansales@powerint.com

#### KOREA

RM 602, 6FL Korea City Air Terminal B/D, 159-6 Samsung-Dong, Kangnam-Gu, Seoul, 135-728 Korea Phone: +82-2-2016-6610 Fax: +82-2-2016-6630 e-mail: koreasales@powerint.com

#### SINGAPORE

51 Newton Road, #19-01/05 Goldhill Plaza Singapore, 308900 Phone: +65-6358-2160 Fax: +65-6358-2015 e-mail: singaporesales@powerint.com

#### TAIWAN

5F, No. 318, Nei Hu Rd., Sec. 1 Nei Hu District Taipei 11493, Taiwan R.O.C. Phone: +886-2-2659-4570 Fax: +886-2-2659-4550 e-mail: taiwansales@powerint.com

#### UK

First Floor, Unit 15, Meadway Court, Rutherford Close, Stevenage, Herts. SG1 2EF United Kingdom Phone: +44 (0) 1252-730-141 Fax: +44 (0) 1252-727-689 e-mail: eurosales@powerint.com

#### **APPLICATIONS HOTLINE**

World Wide +1-408-414-9660

APPLICATIONS FAX

World Wide +1-408-414-9760



