mail

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CHIP COIL (CHIP INDUCTORS) LQM2MPN C GOL REFERENCE SPECIFICATION

1. Scope

This reference specification applies to LQM2MPN_GOL series, Chip Coil (Chip Inductors).

2. Part Numbering

(ex)	LQ	Μ	2M	P	Ν	R47	М	G	0	L
	Product ID	Structure	Dimensio	Applications	Category	Inductance	Tolerance	Dimension	Other	Packaging
			(L×W) a	and				(T)		L:Taping
			(Characteristics	5					*B:BULK
				*B:Bull	k packing	also availal	ole			

3. Rating

^B:Bulk packing also available


Operating Temperature Range
 Storage Temperature Range

- 55°C to + 125°C - 55°C to + 125°C

Customer	MURATA	Inductance		DC Resistance		Self Resonant	Rated Current ^{*1}	
Part Number	Part Number	(<i>μ</i> H)	Tolerance	(Ω)		Frequency	(A)	
			TOTETATICE	Тур	Max	(MHz min.)	85°C ^{*2}	125°C ^{*2}
	LQM2MPNR47MG0L	0.47	M:±20%	0.060	0.075	100	1.6	1.2
	LQM2MPNR47NG0L	0.47	N:±30%	0.000	0.075	100	1.0	1.2
	LQM2MPN1R0NG0L	1.0	N:±30%	0.085	0.107	60	1.4	1.0
	LQM2MPN1R5MG0L	15	M:±20%	0.11	0.138	50	1.2	0.9
	LQM2MPN1R5NG0L	1.5	N:±30%	0.11	0.136	50	1.2	0.9
	LQM2MPN2R2MG0L	2.2	M:±20%	0.11	0.138	40	1.2	0.9
	LQM2MPN2R2NG0L	2.2	N:±30%	0.11	0.136	40	1.2	0.9
	LQM2MPN3R3NG0L	3.3	N:±30%	0.12	0.15	30	1.2	0.9
	LQM2MPN4R7MG0L	4.7	M:±20%	0.14	0.175	20	1.1	0.8
	LQM2MPN4R7NG0L	4./	N:±30%	0.14	0.175	20	1.1	0.8

*1 When applied Rated current to the Products, temperature rise caused by self-generated heat shall be limited to 40 °C max


*2 Rated Current is derated as right figure depending on the operating temperature.



4. Testing Conditions

«Unless otherwi	se specified》	In case of doubt》		
Temperatur	e : Ordinary Temperatur	e / 15°C to 35°C	Temperature	: 20°C ± 2°C
Humidity	: Ordinary Humidity	/ 25%(RH) to 85%(RH) Humidity	: 60%(RH) to 70%(RH)
			Atmospheric	Pressure : 86kPa to 106kPa

5. Appearance and Dimensions

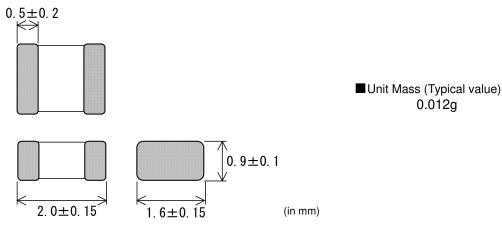

6. Electrical Performance

No.	Item	Specification	Test Method
6.1	Inductance	Inductance shall meet item 3.	Measuring Equipment: Agilent 4294A or quivalent (1mA) Measuring Frequency: 1MHz
6.2	DC Resistance	DC Resistance shall meet item 3.	Measuring Equipment: Digital multi meter Digital multi meter (TR6846 or equivalent) terminal1
6.3	Self Resonant Frequency (S.R.F)	S.R.F shall meet item 3.	Measuring Equipment: Agilent 4294A or equivalent
6.4	Rated Current	Self temperature rise shall be limited to 40°C max.	The rated current is applied.



7. Mechanical Performance

No.	Item	Specification	Test Method
7.1	Shear Test	Chip coil shall not be damaged after	Applied Direction
		tested as follows.	Chip Coil
			F
			Substrate
			Force: 10N
			Hold Duration: 5s±1s
			Applied Direction: Parallel to PCB
7.2	Bending Test		Substrate: Glass-epoxy substrate
	Domaing root		(100mm × 40mm × 1.0mm)
			Solder: Reflow
			Pressure jig
			R230 JF
			Deflection
			Product (in mm)
			45 45
			Speed of Applying Force: 0.5mm / s Deflection: 3mm
			Hold Duration: 30 s
7.3	Vibration	-	Oscillation Frequency:
7.0	VIDIATION		10Hz to 2000Hz to 10Hz for 20 min
			Total amplitude 3.0 mm or Acceleration
			amplitude 245m/s ² whichever is smaller.
			Testing Time:
			A period of 4h in each of 3 mutually
			perpendicular directions.
7.4	Drop		It shall be dropped on concrete or steel
			board.
			Method : free fall
			Height : 1m
			Total of 10 cycles
7.5	Solderability	The wetting area of the electrode	Flux: Ethanol solution of rosin 25(wt)%
		shall be at least 90% covered with	(Immersed for 5s to 10s)
		new solder coating.	Solder: Sn-3.0Ag-0.5Cu
			Pre-Heating: 150°C±10°C / 60s to 90s
			Solder Temperature: 240°C±5°C
			Immersion Time: 3s±1s
7.6	Resistance to	Appearance: No damage	Flux: Ethanol solution of rosin 25(wt)%
	Soldering Heat	Inductance Change: within ±30%	(Immersed for 5s to 10s)
	_		Solder: Sn-3.0Ag-0.5Cu
			Pre-Heating: 150°C±10°C / 60s to 90s
			Solder Temperature: 270°C±5°C
			Immersion Time: 10s±1s
			Then measured after exposure in the room
			condition for $24h\pm 2h$.
L	l		


8. Environmental Performance

It shall be soldered on the substrate.

No.	Item	Specification	Test Method
8.1	Heat Resistance	Appearance: No damage	Temperature: 125°C±2°C
		Inductance Change: within ±30%	Time: 1000h (+48h,-0h)
			Then measured after exposure in the room
			condition for 24h±2h.
8.2	Cold Resistance		Temperature: -55°C±2°C
			Time: 1000h (+48h,-0h)
			Then measured after exposure in the room
			condition for 24h±2h.
8.3	Humidity		Temperature: 70°C±2°C
			Humidity: 90%(RH) to 95%(RH)
			Time: 1000h (+48h,-0h)
			Then measured after exposure in the room
			condition for 24h±2h.
8.4	Temperature		1 cycle:
	Cycle		1 step: -55°C±2°C / 30 min±3 min
			2 step: Ordinary temp. / 10 min to 15 min
			3 step: 125°C±2°C / 30 min to 3 min
			4 step: Ordinary temp. / 10 min to15 min
			Total of 100cycles
			Then measured after exposure in the room
			condition for 24h±2h.

9. Specification of Packaging

9.1 Appearance and Dimensions of plastic tape (8mm-wide)

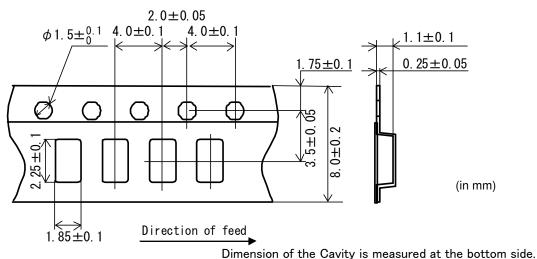

9.2 Specification of Taping

- (1) Packing quantity (standard quantity)
 - 3,000 pcs / reel
- (2) Packing Method
- Products shall be packed in the each embossed cavity of plastic tape and sealed by cover tape. (3) Sprocket hole
 - The sprocket holes are to the right as the tape is pulled toward the user.
- (4) Spliced point

Plastic tape and Cover tape has no spliced point.

(5) Missing components number

Missing components number within 0.1% of the number per reel or 1 pc., whichever is greater, and are not continuous. The Specified quantity per reel is kept.

9.3 Pull Strength


Plastic tape	10N min.
Cover tape	5N min.

9.4 Peeling off force of cover tape

[Speed of Peeling off	300mm / min	165 to 180 degree F Cover tape
	Peeling off force	Plastic tape: 0.1N to 0.7N (minimum value is typical)	
l			

9.5 Dimensions of Leader-tape, Trailer and Reel

There shall be leader-tape (cover tape) and trailer-tape (empty tape) as follows.

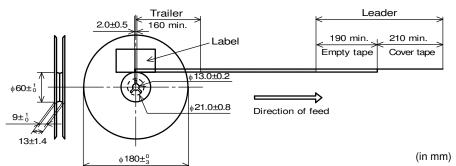

9.6 Marking for reel

Customer part number, MURATA part number, Inspection number (*1), RoHS marking (*2), Quantity etc ···


 Expression of Inspection No.> 	<u> </u>
	(1) (2) (3)
(1) Factory Code	
(2) Date First digit	: Year / Last digit of year
	: Month / Jan. to Sep. \rightarrow 1 to 9, Oct. to Dec. \rightarrow O, N, D
Third, Fourth d	
(3) Serial No.	
*2) <expression marking="" of="" rohs=""></expression>	> ROHS – Υ (Δ)
, i 3	$(\overline{1})$ $(\overline{2})$
(1) DoUS regulation conform	ity parts

(1) RoHS regulation conformity parts.(2) MURATA classification number

9.7 Marking for Outside package (corrugated paper box)

Customer name, Purchasing order number, Customer part number, MURATA part number, RoHS marking (*2), Quantity, etc ····

9.8 Specification of Outer Case



P5/9

Limitation of Applications


Please contact us before using our products for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property.

- (1) Aircraft equipment
- (2) Aerospace equipment
- (3) Undersea equipment
- (4) Power plant control equipment (5) Medical equipment
- (6) Transportation equipment (vehicles, trains, ships, etc.)
- (7) Traffic signal equipment
- (8) Disaster prevention / crime prevention equipment (9) Data-processing equipment
- - (10) Applications of similar complexity and /or reliability requirements to the applications listed in the above

11. Notice

This product is designed for solder mounting. Please consult us in advance for applying other mounting method such as conductive adhesive.

11.1 Land pattern designing



11.2 Flux, Solder

·Use rosin-based flux.

Don't use highly acidic flux with halide content exceeding 0.2(wt) % (chlorine conversion value).

- Don't use water-soluble flux.
- ·Use Sn-3.0Ag-0.5Cu solder.
- Standard thickness of solder paste: $100 \,\mu$ m to $150 \,\mu$ m.

11.3 Flow soldering / Reflow soldering conditions

• Pre-heating should be in such a way that the temperature difference between solder and product surface is limited to 150°C max. Cooling into solvent after soldering also should be in such a way that the temperature difference is limited to 100°C max.


Insufficient pre-heating may cause cracks on the product, resulting in the deterioration of products quality.

- · Standard soldering profile and the limit soldering profile is as follows.
- The excessive limit soldering conditions may cause leaching of the electrode and/or resulting in the deterioration of product quality.

Soldering profile

(1) Flow soldering profile

Cycle of flow

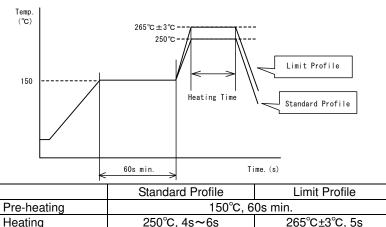

MURATA MFG.CO., LTD

2 times


2 times

Spec No. JELF243B-0022K-01

Reference Only

P7/9

(2) Reflow soldering profile

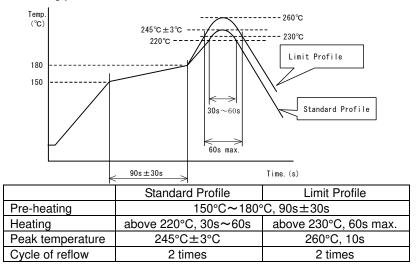

11.4 Reworking with soldering iron


The following conditions must be strictly followed when using a soldering iron.

Pre-heating	150°C, 1 min
Tip temperature	350°C max.
Soldering iron output	80W max.
Tip diameter	ϕ 3mm max.
Soldering time	3(+1, -0)s
Time	2 times

Note : Do not directly touch the products with the tip of the soldering iron in order to prevent the crack on the products due to the thermal shock.

11.5 Solder Volume

- ·Solder shall be used not to be exceeded the upper limits as shown below.
- Accordingly increasing the solder volume, the mechanical stress to Chip is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance.




11.6 Product's location


The following shall be considered when designing and laying out P.C.B.'s.


(1) P.C.B. shall be designed so that products are not subject to the mechanical stress due to warping the board.

[Products direction]



Products shall be located in the sideways direction (Length: a b) to the mechanical stress.





Products (A, B, C, D) shall be located carefully so that products are not subject to the mechanical stress due to warping the board.

Because they may be subjected the mechanical stress in order of A>C>B \cong D.

MURATA MFG.CO., LTD

11.7 Cleaning Conditions

Products shall be cleaned on the following conditions.

- (1) Cleaning temperature shall be limited to 60°C max. (40°C max for IPA.)
- (2) Ultrasonic cleaning shall comply with the following conditions with avoiding the resonance phenomenon at the mounted products and P.C.B.

Power : 20 W / I max. Frequency : 28kHz to 40kHz Time : 5 min max.

(3) Cleaner

1. Alcohol type cleaner Isopropyl alcohol (IPA)

2. Aqueous agent PINE ALPHA ST-100S

- (4) There shall be no residual flux and residual cleaner after cleaning. In the case of using aqueous agent, products shall be dried completely after rinse with de-ionized water in order to remove the cleaner.
- (5) Other cleaning Please contact us.

11.8 Resin coating

The inductance value may change and/or it may affect on the product's performance due to high cure-stress of resin to be used for coating/molding products. So please pay your careful attention when you select resin.

In prior to use, please make the reliability evaluation with the product mounted in your application set.

11.9 Caution for use

There is possibility that the inductance value change due to magnetism. Don't use a magnet or a pair of tweezers with magnetism when chip coil are handled. (The tip of the tweezers should be molded with resin or pottery.)

11.10 Magnetic Saturation

When the excessive current over rated current is applied, the inductance value may change due to magnetism.

11.11 Handling of a substrate

After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting to the substrate when cropping the substrate, inserting and removing a connector from the substrate or tightening screw to the substrate.

Excessive mechanical stress may cause cracking in the product.

Bending

Twisting

11.12 Storage and Handing Requirements

- (1) Storage period
 - Use the products within 6 months after delivered.

Solderability should be checked if this period is exceeded.

- (2) Storage conditions
 - ·Products should be stored in the warehouse on the following conditions.
 - Temperature : -10°C to 40°C
 - Humidity : 15% to 85% relative humidity No rapid change on temperature and humidity

Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.

• Products should be stored on the palette for the prevention of the influence from humidity, dust and so on.

Products should be stored in the warehouse without heat shock, vibration, direct sunlight and so on.
Products should be stored under the airtight packaged condition.

(3) Handling Condition

Care should be taken when transporting or handling product to avoid excessive vibration or mechanical shock.

12. 🕂 Note

- (1) Please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.
- (2) You are requested not to use our product deviating from the reference specifications.
- (3) The contents of this reference specification are subject to change without advance notice. Please approve our product specifications or transact the approval sheet for product specifications before ordering.