imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Embedded Power for **Business-Critical Continuity**

LQS Series

Quarter-Brick Series

Total Power: Input Voltage: 36 V to 75 V # of Outputs: 1

200 Watts





Rev. 09.29.10 LQS Series 1 of 5

Electrical Specifications

Input			
Input voltage range:	24 V nominal 48 V nominal	18 - 36 Vdc 36 - 75 Vdc	
Input current:	No load Remote OFF	85 mA to 150 mA 5 mA	
Active high remote ON/OFF:	Logic compatibility ON OFF	Open collector ref to -input Open circuit or > 2.4 Vdc < 0.4 Vdc	
Undervoltage lockout:	Power up Power down	35.5 V (typ.) 33.5 V (typ.)	
Start-up time (See note 2):	Power up Remote ON/OFF	10 ms (typ.) 10 ms (typ.)	
Output			
Voltage adjustability:		80% to 110%	
Minimum load:		0%	
Overshoot	At turn-on and turn-off	None	
Undershoot:		None	
Transient response: (See note 1)		70 mV, typ. deviation 20 μs recovery	





Special Features Ultra high efficiency topology

- Unprecedented useable output power levels
- High power density (200 W/in³⁾ open-frame technology
- Wide ambient temperature range, -40 °C to +85 °C
- 80% to 110% output trim
- Monotonic start-up in normal and prebiased loads
- Basic insulation system
- Overvoltage and overtemperature protection
- Secondary side control, no optocouplers, fast transient response
- 100 V, 100 ms input transient rated
- Available RoHS compliant

Safety

UL, cUL 60950-1 Ed 2 CSA C22.2 No 60950-1 Ed 2 VDE EN60950-1:2006 + A11:2009

Rev. 09.29.10 LQS Series 2 of 5

Electrical Specifications continued

EMC Characteristics						
Immunity:						
ESD air enclosure:	EN61000-4-2 8 kV/6 kV (O/P within spec.)					
Radiated field enclosure:	EN61000-4-3 10 V/m (O/P within spec.)					
Conducted:	EN61000-4-6 10 V (O/P within spec.)					
Input transients:	100 V, 100 ms					
General Characteristics						
Basic insulation:	Input/output	2250 Vdc				
Switching frequency:	Fixed	480 kHz				
Approvals and standards:	(See Note 3)	EN60950-1 VDE, UL/cUL 60950-1				
Material flammability:		UL94V-0				
Weight:		37g (1.30 oz)				
MTBF:	Telcordia Tech SR-332	3,866,933 hours				
Environmental Specifications						
Thermal performance:	Operating ambient temperature	-40 °C to +85 °C				
	Non-operating	-55 °C to +125 °C				
Protection						
Short-circuit	Continuous					
Overvoltage	Non-latching					
Thermal	125 °C hot spot temperature with automatic recovery					

Rev. 09.29.10 LQS Series

3 of 5

Ordering Information

Output Input Input Ripple Output Efficiency			Regi	Regulation		Divide o vistor			
Output Voltage	Current Max. ⁴	Input Ripple Current ⁵	Current Max.	typ.	Set point accuracy Max.	Line	Load	Ripple & noise (pk-pk)	Model Number ^{6,8, 9,10}
48 Vin VALUE MODELS									
1.2 V	1.92 A	150 mA	50 A	88.5%	± 1.5%	± 0.1%	± 0.2%	60 mV	LQS50A48-1V2J
1.5 V	2.36 A	150 mA	50 A	89.5 %	± 1.5%	± 0.1%	± 0.2%	60 mV	LQS50A48-1V5J
1.8 V	2.82 A	150 mA	50 A	90.4%	± 1.5%	± 0.1%	± 0.2%	60 mV	LQS50A48-1V8J
	48 Vin PERFORMANCE MODELS								
1.2 V	4.05 A	250 mA	100 A	86.0%	± 1.5%	± 0.1%	± 0.2%	60 mV	LQS100A48-1V2J
1.5 V	3.8 A	200 mA	80 A	88.8%	± 1.5%	± 0.1%	± 0.2%	60 mV	LQS80A48-1V5J
1.8 V	4.6 A	200 mA	80 A	90.0%	± 1.5%	± 0.1%	± 0.2%	60 mV	LQS80A48-1V8J
2.5 V	4.1 A	200 mA	50 A	90.0%	± 1.5%	± 0.1%	± 0.2%	60 mV	LQS50A48-2V5J
3.3 V	5.2 A	200 mA	50 A	91.0%	± 1.5%	± 0.1%	± 0.2%	60 mV	LQS50A48-3V3J
	48 Vin ULTRA MODELS								
1.5 V	4.8 A	200 mA	100 A	88.5%	± 1.5%	± 0.1%	± 0.2%	60 mV	LQS100A48-1V5J
1.8 V	5.7 A	200 mA	100 A	89.5%	± 1.5%	± 0.1%	± 0.2%	60 mV	LQS100A48-1V8J
2.5 V	6.2 A	200 mA	80 A	91.0%	± 1.5%	± 0.1%	± 0.2%	60 mV	LQS80A48-2V5J
3.3 V	6.2 A	200 mA	60 A	91.0%	± 1.5%	± 0.1%	± 0.2%	60 mV	LQS60A48-3V3J
5 V	6.2 A	200 mA	40 A	92.0%	± 1.5%	± 0.1%	± 0.2%	60 mV	LQS40A48-5V0J (7)
5 V	6.2 A	200 mA	40 A	91.8%	± 1.5%	± 0.1%	± 0.2%	60 mV	LQS40A48-5V0GJ (11)
24 Vin MODELS									
1.8 V	3.4 A	200 mA	30 A	91.0%	± 1.5%	± 0.1%	± 0.2%	60 mV	LQS30A24-1V8J
3.3 V	6.5 A	300 mA	30 A	89.5%	± 1.5%	± 0.1%	± 0.2%	60 mV	LQS30A24-3V3J
	LQS60A48-3V3RANJ								
	L = Low Profile							ompliance ⁽⁹⁾	
	Q = 1/4 Brick						,	ree (RoHS 6/6 comp	bliant)
Type of Output								gth Options	
S = Single							0.188" (4.78 mm) 45" (3.68 mm)		
Rated Output Current								10" (2.79 mm)	
40 A = 40 Amps, 60 A = 60 Amps etc.							Body H	eight, Package Ty	pe, and Pin Length
	Nominal Rated Input Voltage					A = 0.300" (7.62 mm), Through hole,			
	24 = 24 Volts (18 Vdc to 36 Vdc range)					0.188" (4.78mm) Pins			
48 = 48 Volts (36 Vdc to 75 Vdc range)						E = 0.340" (8.64 mm), Through hole, 0.188" (4.78mm) Pins			
	Output Voltage					$S = 0.28^{\circ}$ (7.11 mm), Surface Mount ⁽⁶⁾			
	1V5 = 1.5 Volts, 1V8 = 1.8 Volts etc.							e ON/OFF Logic ⁽⁸⁾	

Notes:

1. di/dt = 1 A/us, Vin = 48 Vdc, Tc = 25 $^\circ$ C, load change = 50% to 75% lo max. and 75% to 50% lo max. Deviation varies by model. For further details see longform datasheet

2. Start-up into resistive load.

3. This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.

4. Recommended input fusing is up to 10 A HRC 200 V rated fuse.

5. Peak to peak measured without external π filter. Significant reduction possible with external filter. See Application Note 141 for further details.

6. 'S' option applies to the 24 V models only.


Except LQS40A48-5V0J which has the double output pins.
 Active low Remote ON/OFF is available. Standard product is Active High. When ordering active low parts, designate with the suffix 'R' e.g. LQS100A48-1V8RAJ
 TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.

Blank = Positive R = Negative

10. NOTICE: Some models do not support all optons. Please contact your local sales representative or use the on-line model number search tool at www. PowerConversion.com to find a suitable alternative.

11. LQS40A48-5V0GJ has single output pins /0.188" pin length/0.340" body height

Mechanical Drawings

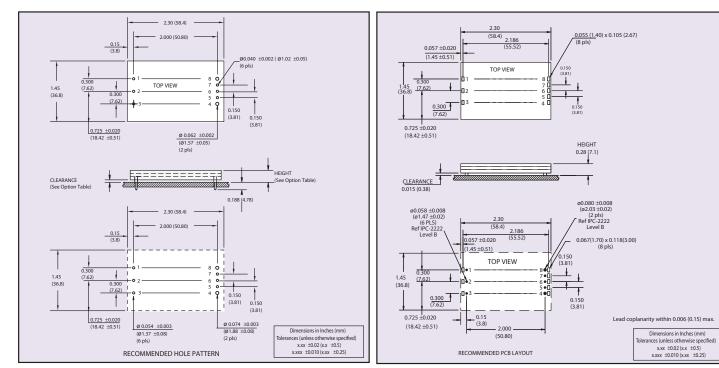


24 V/ 48 V Mechanical Drawing for Output Current of 50 A or less (See Note 7)

24 V Surface-mount Mechanical Drawing and Pinout Table

Pin Connections				Dimension Options			
Pin Number	Function	Pin Number	Function	Option	Clearance	Height	
1	+Vin	5	-Sense		± 0.016 (0.41)	+0.022 (0.56)	
2	ON/OFF	6	Trim		,	-0.030 (0.76)	
3	-Vin	7	+Sense	А	0.030 (0.76)	0.300 (7.62)	
4	-Vout	8	+Vout	E	0.070 (1.78)	0.340 (8.64)	

Rev. 09.29.10 LQS Series 5 of 5

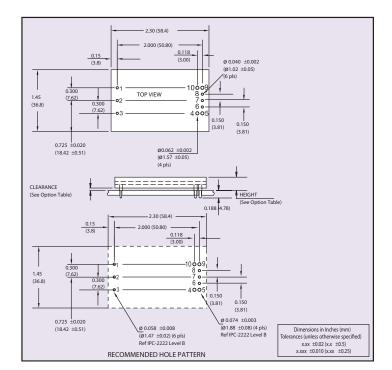

48 V Mechanical Drawing for Output Current Freater than 50 A "The Double P" Pinout ⁽⁷⁾

Americas

5810 Van Allen Way Carlsbad, CA 92008 USA Telephone: +1 760 930 4600 Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park Merry Hill, Dudley West Midlands, DY5 1LX United Kingdom Telephone: +44 (0) 1384 842 211 Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza 2 Wing Yip Street Kwun Tong, Kowloon Hong Kong Telephone: +852 2176 3333 Facsimile: +852 2176 3888

For global contact, visit:


www.PowerConversion.com

techsupport.embeddedpower @emerson.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.

The global leader in enabling business-critical continuity.



EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2010 Emerson Electric Co.