

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







# Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co.


# RF 35/05.10/6.0

## **Technical Data Sheet**

# Rosenberger

Cable assembly - Standardportfolio RPC-2.40 Plug / RPC-2.40 Jack - RTK 125

**LU8-001-XXX** 

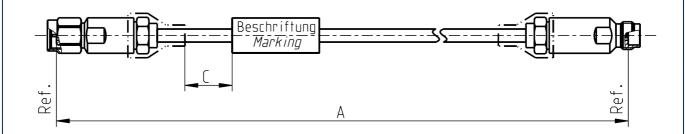

All dimensions are in mm; tolerances according to ISO 2768 c-H

## Available variants

Туре	"A" (mm)	"C" (mm)	Insertion loss ≤ (dB) at 50 GHz	Marking	Weight (g) / pce	
LU8-001-500	500	20±3	2.40	ROSENBERGER WW/YY XXX LU8-001-500	28	
LU8-001-750	750	20±3	3.40	ROSENBERGER WW/YY XXX LU8-001-750	35	
LU8-001-1000	1000	20±3	4.40	ROSENBERGER WW/YY XXX LU8-001-1000	41	
LU8-001-1500	1500	20±3	6.40	ROSENBERGER WW/YY XXX LU8-001-1500	54	

WW - week YY - year XXX – serial no.

## **Documents**

Technical data sheet connectors RPC-2.40 plug 09S121-2U1S3 RPC-2.40 jack 09K121-2U1S3

Technical data sheet cable RTK 125

## Assembly parts

www.rosenberger.de

 Connector left
 RPC-2.40 plug
 09S121-2U1S3

 Connector right
 RPC-2.40 jack
 09K121-2U1S3

 Cable
 RTK 125

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany

Tel. : +49 8684 18-0 Fax : +49 8684 18-499 Email : info@rosenberger.de Page

1/2

# Dieses Dokument ist urheberrechtlich geschützt ● This document is protected by copyright ● Rosenberger Hochfrequenztechnik GmbH & Co.

Ã

# RF 35/05.10/6.0

## **Technical Data Sheet**

# Rosenberger

Cable assembly - Standardportfolio RPC-2.40 Plug / RPC-2.40 Jack - RTK 125

**LU8-001-XXX** 

## Electrical data

Impedance

Frequency Return loss

Insertion loss RF-leakage  $50 \Omega$ 

DC to 50 GHz

≥ 16.5 dB, DC to 50 GHz see table available variants ≥ 100 dB up to 1 GHz

## Mechanical data

Minimum bend radius:

Single Multiple 5.10 mm 16 mm

## **Environmental data**

Temperature range 2002/95/EC (RoHS)

-40℃ to +85℃ compliant

## **Packing**

Standard

1 pce in box

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Martin Moder	06/02/12	Herbert Babinger	15/02/12	a00	12-s084	M. Rahberger	15/02/12
Rosenberger Hochfrequenztechnik GmbH & Co. KG				Tel.	: +49 8684 18-0		Page

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Fax: +49 8684 18-499 Email: info@rosenberger.de

2/2