

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Ultra Low-profile Interface Connectors with 2.0 mm Mounting Height

LX Series



Overview

LX Series is a super low profile interface connector with sequential mating design and friction lock, which has been developed for low profile mobile terminals.

This connenctor features ESD problem prevention in 0.5 mm terminal pitch and 2.0 mm small and low profile design, which makes it suitable to small mobile devices.

■ Features

1. Low profile on the PCB

When mounted on the PCB surface the receptacle height is 2.0 mm.(Fig.1)

2. Strong Construction

Use of metal shell guarantees that fully mated connectors will withstand 30 N max. force applied on the plug in any direction.(Fig.2)

3. High contact reliability

Bellows contact with long mating stroke provides highly reliable mating as well as soft insertion feeling.

Mating durability is up to 5,000 times long.

4. Sequenced contact mating

The protection of the circuit is assured by having the 2 contact at each end of the receptacle are longer by 0.5 mm, with electrical wipe of 1.45 mm. Location of the circuit protection contacts can be changed as required.

Remaining contacts electrical wipe is 0.95 mm.

5. Incorrect Insertion Prevention

Connectors will not be damaged when angled or reverse plug insertion is attempted.(Fig.3)

6. Safety plug release


Plug will release when an excessive pull force is applied to the cable.


7. RoHS Compliant


All materials and substances used to produce this product comply with RoHS standards.

Applications

DSC, PDA, thin electronic equipment, mobile phones and other portable devices requiring high durability interface connectors.

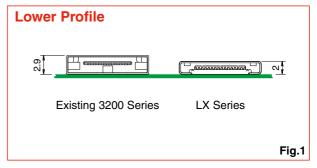

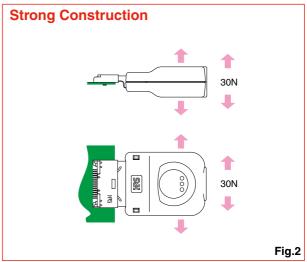

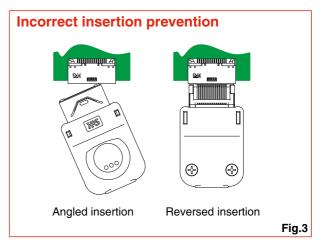

■Product specifications

| | Ratings | Current rating | 0.5A (1A max. can be carried via 2 random contacts) | Operating temperature range : −40°C to +70°C |
|--|---------|----------------|---|--|
| | | Voltage rating | 50V AC | Storage temperature range : −55°C to +85°C |

| Characteristic | Specification | Conditions | |
|---------------------------|---|--|--|
| 1.Contact resistance | 70mΩ max. | 100mA DC | |
| O Inculation registeres | 1000 MΩ min. (dry) | 100V DC | |
| 2.Insulation resistance | 10 MΩ min. (high humidity) | 100V DC | |
| 3.Withstanding voltage | No flashover or insulation breakdown. | 250V AC / one minute | |
| 4.Mating/un-mating forces | Mating: 10N max., un-mating: 4N min. | With corresponding connector. | |
| 5. Durability | Amount of change of contact registeness 20m0 may | nax. 5,000 times | |
| (mating/n-mating) | Amount of change of contact resistance: 20mΩ max. | | |
| 6. Shock | No electrical discontinuity of 1μ sec. Max. | Acceleration of 490 m/s², 11 ms duration, | |
| o. Shock | Contact resistance: 20mΩ max. | sine half-wave waveform, 3 cycles, 3 axis. | |
| 7. Vibration | Contact resistance: 20mΩ max. | Frequency: 10 to 55 Hz, single amplitude of 0.75 mm, | |
| 7. Vibration | Insulation resistance: 10MΩ min. | acceleration of 98 m/s², 2 hours, 3 axis. | |
| 9. Tomporatura cuala | Contact resistance: 20mΩ max. | Temperature: $-55^{\circ}\text{C} \rightarrow +5^{\circ}\text{C}$ to $+35^{\circ}\text{C} \rightarrow +85^{\circ}\text{C} \rightarrow +5^{\circ}\text{C}$ to $+35^{\circ}\text{C}$ | |
| 8. Temperature cycle | Insulation resistance: 10MΩ min. | Time : 30 \rightarrow 2 to 3 \rightarrow 30 \rightarrow 2 to 3 min | |
| 9. Salt spray | No heavy corrosions | 5% water solution at 35°C for 48 hours | |

■Materials / Finish

Receptacles

| Component | Material | Finish/Color | Remarks |
|-----------|-----------------|-----------------------------------|---------|
| Insulator | Synthetic resin | Black | UL94V-0 |
| Contacts | Copper alloy | Contact area: Gold plated | |
| | | Mounting area: Gold flash plated | |
| Shell | Stainless steel | Soldering area: Gold flash plated | |

●Plugs

| Component | Material | Finish/Color | Remarks |
|---------------------|-----------------|-------------------------------------|----------------|
| Insulator | Synthetic resin | Black | UL94V-0 |
| Contacts | Copper alloy | Contact area: Gold plated | |
| | | Termination area: Gold flash plated | |
| Metal shield | Stainless steel | | |
| Covers | Synthetic resin | Black | UL94V-0 |
| Strain relief clamp | Copper alloy | | |
| Self tapping screws | Steel | Trivalent black chromate | Screw size: M2 |

■Ordering information

•Receptacles

●Plugs

Bushing


| 0 | Series number : LX | | | |
|----------------|---------------------------------|--|--|--|
| 2 | Termination type | | | |
| | 40 : Solder type | | | |
| | 60 : Right angle SMT | | | |
| 8 | Number of contacts: 12, 16, 20 | | | |
| ← Contact type | | | | |
| | P : Male contact (Plug) | | | |
| | S : Female contact (Receptacle) | | | |
| 6 | Bushing | | | |
| | BS(4.0) : Dia. 4.0mm cable | | | |
| | BS(4.5) : Dia. 4.5mm cable | | | |
| | BS(5.0) : Dia. 5.0mm cable | | | |
| | | | | |


■Receptacles



| Part No. | HRS No. | Packaging | RoHS |
|----------|------------|----------------|------|
| LX60-12S | 245-0018-3 | | |
| LX60-16S | 245-0001-0 | 2,000 pcs/reel | |
| LX60-20S | 245-0016-8 | | |


●12 pos.

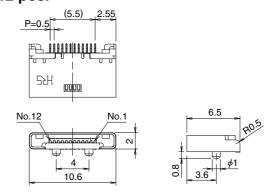




No conductive traces in this area Land area


●16 pos.

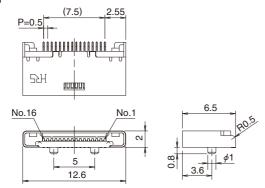


●20 pos.

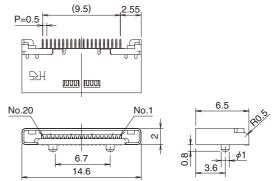

Recommended PCB mounting pattern

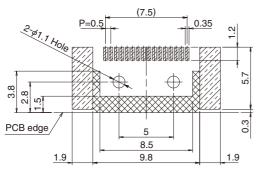

No conductive traces in this area

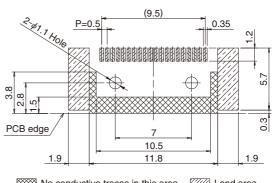


No conductive traces in this area

■Plugs




| Part No. | HRS No. | Packaging | RoHS |
|----------|------------|-----------|------|
| LX40-12P | 245-0019-6 | | |
| LX40-16P | 245-0002-3 | 1 | 0 |
| LX40-20P | 245-0017-0 | | |


●12 pos.

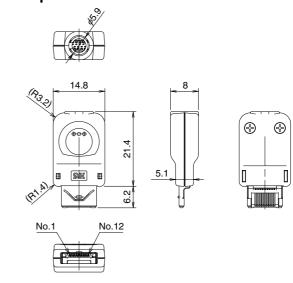

●16 pos.

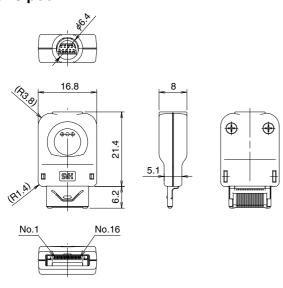

●20 pos.

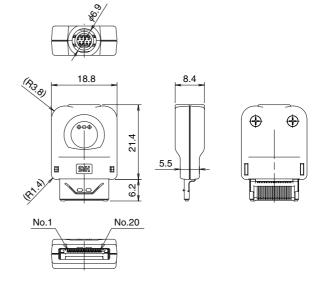


■Bushing




| Part No. | HRS No. | Packaging | RoHS |
|----------------|------------|--------------|------|
| LX40-12BS(4.0) | 245-0020-5 | | |
| LX40-16BS(4.5) | 245-0021-8 | 100 pcs/pack | |
| LX40-20BS(5.0) | 245-0022-0 | | |

Embossed carrier tape dimensions

●Reel dimensions




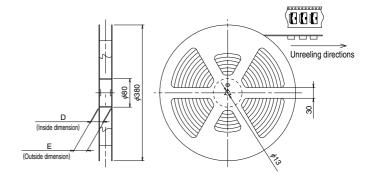

| | | | (mm) |
|----------|----|------|------|
| Part No. | Α | В | С |
| LX60-12S | | | |
| LX60-16S | 24 | 11.5 | 12 |
| LX60-20S | | | |

| | | (11111) |
|----------|------|---------|
| Part No. | D | E |
| LX60-12S | | |
| LX60-16S | 25.5 | 29.5 |
| LX60-20S | | |

●Receptacles Recommended Temperature Profile

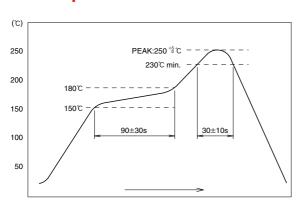

This measurement is performed on the contact lead section.


The temperature profile may vary due to external conditions such as the type of cream solder, manufacturer, and board size. Please contact the solder manufacturer for their specifications.

●Applicable Plug Cable

| | | (mm) |
|----------|-----------------|---|
| Part No. | Cable diameter | Wire size |
| LX40-12P | <i>ϕ</i> 4 max. | |
| LX40-16P | φ4.5 max. | ϕ 0.6 mm max. (AWG#30 to 32 or equivalent) |
| LX40-20P | <i>φ</i> 5 max. | |

- Note 1: Applicable cable sizes are guidelines. (There may be slight differences depending on the cable outer insulation)
- Note 2: Cables must be attached using single piece overmolded bushings on the cable.
- Note 3: Please refer to applicable Cable Termination Procedures Manual for correct plug assembly and cable termination.
- Note 4: Contact HRS for cable assemblies.

Mated Condition Dimensions



USA:

HIROSE ELECTRIC (U.S.A.), INC. Headquarters

2688 Westhills Court, Simi Valley, CA 93065-6235

Phone: +1-805-522-7958 Fax: +1-805-522-3217 http://www.hiroseusa.com

THE NETHERLANDS: HIROSE ELECTRIC EUROPE B.V.

Hogehillweg #8 1101 CC Amsterdam Z-0

Phone: +31-20-6557460 Fax: +31-20-6557469 http://www.hiroseeurope.com

UNITED KINGDOM:

Hirose Electric Europe BV (UK Branch)

4 Newton Court, Kelvin Drive, Knowlhill, Milton Keynes, MK5 8NH

Phone: +44-1908 202050 Fax: +44-1908 202058

CHINA:

HIROSE ELECTRIC TECHNOLOGIES (SHENZHEN) CO., LTD.

Room 09-13, 19/F, Office Tower Shun Hing Square, Di Wang Commercial Centre, 5002 Shen Nan Dong Road, Shenzhen City, Guangdong Province, 518008

Phone: +86-755-8207-0851 Fax: +86-755-8207-0873 http://www.hirose-china.com.cn

KOREA:

HIROSE KOREA CO., LTD.

1261-10, Jeoungwhang-Dong, Shihung-City,

Kyunggi-Do 429-450

Phone: +82-31-496-7000,7124 Fax: +82-31-496-7100 http://www.hirose.co.kr

INDIA:

HIROSE ELECTRIC SINGAPORE PTE. LTD. Bangalore Liaison office

Unit No.03, Ground Floor, Explorer Building International Tech Park Whitefield Road, Bangalore 560066 Karnataka, India

Phone: +91-80-4120 1907 Fax: +91-80-4120 9908

http://www.hirose-singapore.com.sg

USA:

HIROSE ELECTRIC (U.S.A.), INC. San Jose Office

3255 Scott Boulevard, Building 7, Suite 101

Santa Clara, CA 95054 Phone: +1-408-253-9640 Fax: +1-408-253-9641 http://www.hiroseusa.com

GERMANY:

HIROSE ELECTRIC EUROPE B.V. German Branch

Herzog-Carl-Strasse 4 D-73760 Ostfildern

(Scharnhauser Park) Phone : +49-711-4560-02-1 Fax : +49-711-4560-02-299 http://www.hirose.de

CHINA:

HIROSE ELECTRIC (SHANGHAI) CO., LTD.

1601, Henderson Metropolitan, NO.300, East Nanjing Road, Huangpu District, Shanghai, China 200001

Phone: +86-21-6391-3355 Fax: +86-21-6391-3335 http://www.hirose-china.com.cn

HONG KONG:

HIROSE ELECTRIC HONGKONG TRADING CO., LTD.

Room 1001, West Wing, Tsim Sha Tsui Centre, 66 Mody Road, Tsim Sha Tsui East, Kowloon, Hong Kong

Phone: +852-2803-5338 Fax: +852-2591-6560

http://www.hirose-hongkong.com.hk

SINGAPORE:

HIROSE ELECTRIC SINGAPORE PTE. LTD.

10 Anson Road #26-1, International Plaza

079903, Singapore Phone: +65-6324-6113 Fax: +65-6324-6123

http://www.hirose-singapore.com.sg

MALAYSIA:

HIROSE ELECTRIC SINGAPORE PTE. LTD (Representative office)

1-10-07, Suntech @ Penang Cybercity (1164), Lintang Mayang Pasir 3,11950, Bayan Baru, Penang, Malaysia.

Phone: +604-619-2564 Fax: +604-619-2574 http://www.hirose.com/sg/

USA:

HIROSE ELECTRIC (U.S.A.), INC. Detroit Office (Automotive)

37677 Professional Center Drive, Suite #100C

Livonia, MI 48154 Phone: +1-734-542-9963 Fax: +1-734-542-9964 http://www.hiroseusa.com

GERMANY:

HIROSE ELECTRIC EUROPE B.V. Nuernberg Office

Muggenhofer Str. 136 90429 Nuernberg

Phone: +49-911 32 68 89 63 Fax: +49-911 32 68 89 69 http://www.hirose.de

CHINA:

HIROSE ELECTRIC (SHANGHAI) CO.,LTD. BEIJING BRANCH

A1001, Ocean International Center, Building 56# East 4th Ring Middle Road, ChaoYang District, Beijing, 100025

Phone: +86-10-5165-9332 Fax: +86-10-5908-1381 http://www.hirose-china.com.cn

TAIWAN:

HIROSE ELECTRIC TAIWAN CO., LTD.

103 8F, No.87, Zhengzhou Rd., Taipei Phone: +886-2-2555-7377 Fax: +886-2-2555-7350

http://www.hirose-taiwan.com.tw

ΙΝΝΙΔ•

HIROSE ELECTRIC SINGAPORE PTE. LTD Delhi Ligison Office

Office NO.519, Regus-Green Boulevard, Level5, Tower C, Sec62, Plot B-9A, Block B, Noida, 201301, Uttar Pradesh, India

Phone: +91-12-660-8018 Fax: +91-120-4804949 http://www.hirose.com/sg/



HIROSE ELECTRIC CO.,LTD.

2-6-3,Nakagawa Chuoh,Tsuzuki-Ku,Yokohama-Shi 224-8540,JAPAN TEL: +81-45-620-3526 Fax: +81-45-591-3726

http://www.hirose.com

http://www.hirose-connectors.com