# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








#### BRIGHT RED MAN6110E, MAN6140E GREEN MAN6410E, MAN6440E HIGH EFFICIENCY RED MAN6910E, MAN6940E

### PACKAGE DIMENSIONS

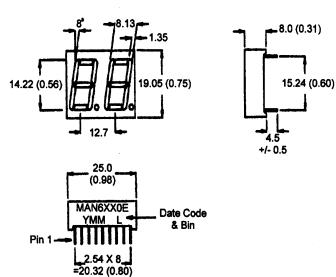

### FEATURES

Easy to read digits. Common anode or cathode. Low power consumption. Bold segments that are highly visible. High brightness with high contrast. White segments on a grey face For MAN64X0E and MAN61X0E.

Red segments on a red face For MAN69X0E. Directly compatible with integrated

circuits.

Rugged plastic/epoxy construction.

#### **APPLICATIONS**

Digital readout displays. Instrument panels.

NOTES: Dimensions are in mm (inch). All pins are 0.5 (0.02) diameter Tolerances are ± 0.25 (0.1) unless otherwise noted.

#### MODEL NUMBERS

Part number Color **Description MAN6110E Bright Red Common Anode: right hand decimal MAN6140E Bright Red** Common Cathode; right hand decimal **MAN6410E** Green **Common Anode; right hand decimal MAN6440E** Green Common Cathode; right hand decimal **MAN6910E** High efficiency red **Common Anode; right hand decimal MAN6940E High efficiency red** Common Cathode; right hand decimal (For other color options, contact your local area Sales Office)



#### **ABSOLUTE MAXIMUM RATING** (TA=25°C unless otherwise specified)

	B.Red	Green	High Eff. Red	
	MAN	MAN	MAN	
	6110E	6410E	6910E	
Part number	6140E	6440E	6940E	Unit
Continuous forward current (I <sub>f</sub> )				
Per Segment	15	30	30	mA
Peak forward current per die $(I_f)$ (at f = 1.0 KHz, Duty factor = 1/10)	50	160	160	mA
Power dissipation (P <sub>D</sub> )	40*	100*	100*	mW
*Derate Linearly from 25°C	See gi	raphical dat	a attached	
Reverse voltage per dice				
<b>Operating and Storage temperat</b>		- 40°C to +85°C		
Lead soldering time (at 1/16 inch fi				


#### **ELECTRO - OPTICAL CHARACTERISTICS** ( $T_A = 25^{\circ}C$ unless otherwise specified)

Best succession	Bright Red MAN 6110E	Green MAN 6410E 6440E	High Eff. Red MAN 6910E 6940E	Test Condition
<u>Part number</u>	6140E	044UE	03405	Condition
Luminous intensity (ucd)				
minimum	300	800	800	<b>i</b> , = 10 mA
typical	700	2000	2000	l, = 10 mA
Forward voltage (V,)				
typical	2.1	2.1	2.0	l, = 20 mA
maximum	2.6	2.8	2.8	i, = 20 mA
Peak wavelength (nm)	697	570	635	l, = 20 mA
Spectral line half width (nm)	90	30	45	l, = 20 mA
Reverse breakdown voltage	(V <sub>R</sub> ) 5	5	5	l, = 100 uA




#### PINOUT

MAN6X10E - Common Anode

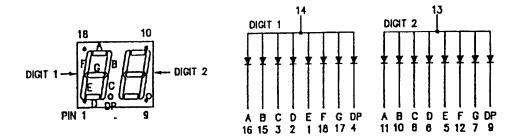


MAN6X40E - Common Cathode

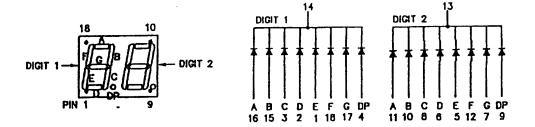




### **GRAPHICAL DETAIL: Bright Red** ( $T_A = 25^{\circ}C$ unless otherwise specified)

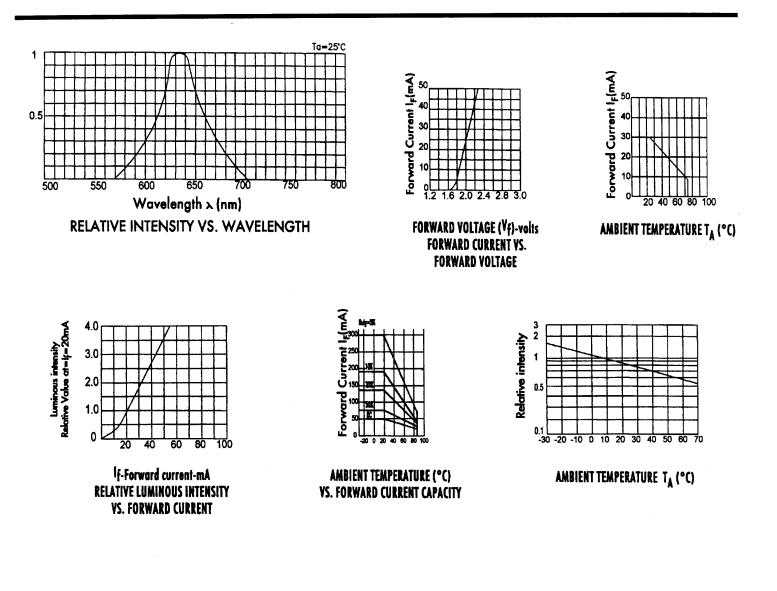




## **GRAPHICAL DETAIL: Green** (T<sub>A</sub> = 25°C unless otherwise specified)

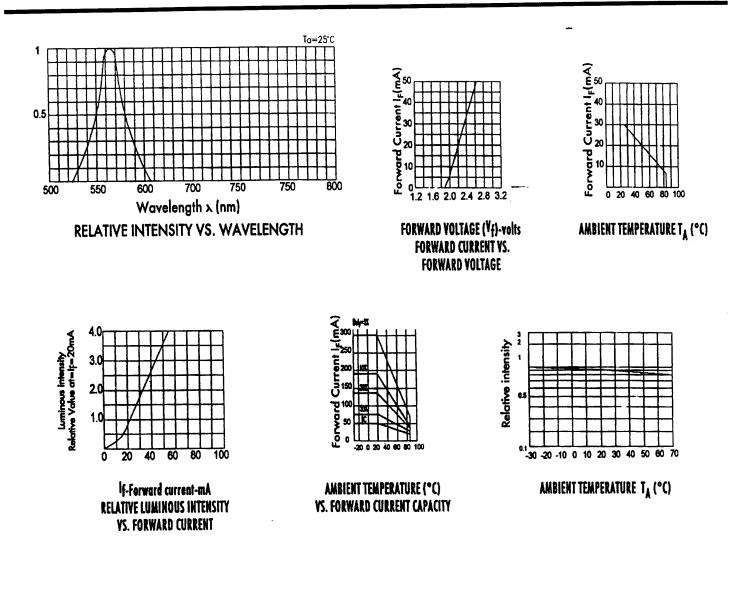



#### **GRAPHICAL DETAIL: High Efficiency Red** (T<sub>A</sub> = 25°C unless otherwise specified)

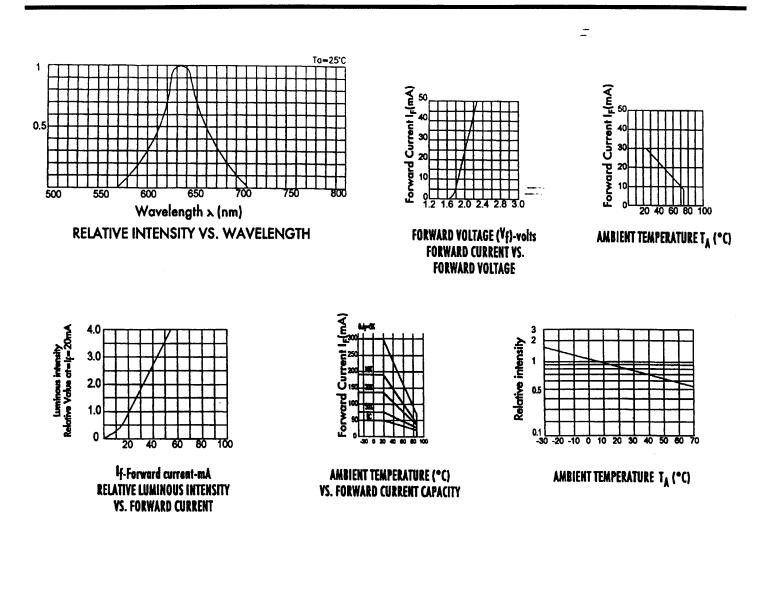



#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.