

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









General Description

The MAX4501/MAX4502 are single-pole/single-throw (SPST), low-voltage, single-supply, CMOS analog switches. The MAX4501 is normally open (NO). The MAX4502 is normally closed (NC).

These CMOS switches can operate continuously with a single supply between +2V and +12V. Each switch can handle Rail-to-Rail® analog signals. The off-leakage current is only 1nA at +25°C or 10nA at +85°C.

The digital input has 0.8V and 2.4V logic thresholds, ensuring TTL/CMOS-logic compatibility when using a single +5V supply.

Applications

Battery-Operated Equipment

Audio and Video Signal Routing

Low-Voltage Data-Acquisition Systems

Communications Circuits

PCMCIA Cards

Cellular Phones

Modems

Features


- ♦ Available in SOT23-5 and SC70-5 Packages
- ♦ +2V to +12V Single-Supply Operation
- ♦ Guaranteed On-Resistance: 250Ω at +5V
- **♦** Guaranteed Low Off-Leakage Current 1nA at +25°C 10nA at +85°C
- ♦ Guaranteed Low On-Leakage Current 2nA at +25°C 20nA at +85°C
- ♦ Low Charge Injection: 10pC
- ♦ Fast Switching Speed: toN = 75ns, toFF = 50ns
- **♦ TTL/CMOS-Logic Compatible with +5V Supply**

Ordering Information

PART	TEMP. RANGE	PIN- PACKAGE	TOP MARK
MAX4501CUK-T	0°C to +70°C	5 SOT23-5	AAAA
MAX4501CSA	0°C to +70°C	8 SO	_
MAX4501CPA	0°C to +70°C	8 Plastic DIP	_
MAX4501C/D	0°C to +70°C	Dice*	_
MAX4501EXK-T	-40°C to +85°C	5 SC70-5	AAE
MAX4501EUK-T	-40°C to +85°C	5 SOT23-5	AAAA
MAX4501ESA	-40°C to +85°C	8 SO	_
MAX4501EPA	-40°C to +85°C	8 Plastic DIP	_
MAX4501MJA	-55°C to +125°C	8 CERDIP**	_

Ordering Information continued at end of data sheet.

Pin Configurations/Functional Diagrams/Truth Table

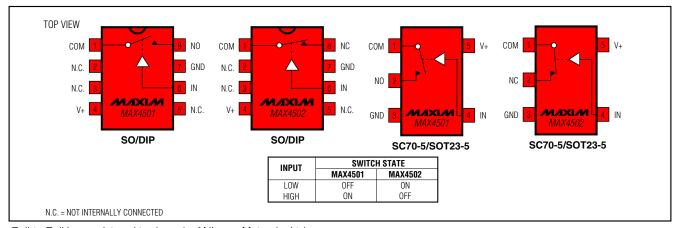

Rail-to-Rail is a registered trademark of Nippon Motorola, Ltd.

MIXIM

Maxim Integrated Products 1

^{*}Contact factory for dice specifications.

^{**}Contact factory for availability.

ABSOLUTE MAXIMUM RATINGS

(Voltages Referenced to GND)	to . 12\/
V+0.3V	
Voltage into Any Terminal (Note 1)0.3V to (V+ +	
±10mA (whichever occ	curs first)
Continuous Current into Any Terminal	±10mA
Peak Current, NO or COM	
(pulsed at 1ms, 10% duty cycle)	±20mA
ESD per Method 3015.7	.>2000V
Continuous Power Dissipation ($T_A = +70^{\circ}C$)	
5-Pin SC70-5 (derate 2.5mW/°C above +70°C)	.200mW
5-Pin SOT23-5 (derate 7.1mW/°C above +70°C)	.571mW

8-Pin SO (derate 5.88mW/°C abo	ve +/0°C)4/1mW
8-Pin Plastic DIP (derate 9.09mW	/°C above +70°C)727mW
8-Pin CERDIP (derate 8.00mW/°C	2 above +70°C)640mW
Operating Temperature Ranges	
MAX4501C/MAX4502C	0°C to +70°C
MAX4501E/MAX4502E	40°C to +85°C
MAX4501MJA/MAX4502MJA	55°C to +125°C
Storage Temperature Range	65°C to +150°C
Lead Temperature (soldering, 10s).	+300°C

Note 1: Voltages exceeding V+ or GND on any signal terminal are clamped by internal diodes. Limit forward-diode current to maximum current rating.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS—+5V Supply

(V+ = +4.5V to +5.5V, V_{INH} = 2.4V, V_{INL} = 0.8V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 2)

PARAMETER	SYMBOL	CONE	MIN	TYP	MAX	UNITS	
ANALOG SWITCH							
Analog Signal Range	V _{COM} , V _{NO} , V _{NC}			0		V+	V
COM to NO or NC	Ron	V _{COM} = 3.5V,	T _A = +25°C		90	250	Ω
On-Resistance	TION	$I_{COM} = 1mA$	$T_A = T_{MIN}$ to T_{MAX}			350	32
NO or NO Off Looks as Coursest	1	V+ = 5.5V,	$T_A = +25^{\circ}C$	-1	0.01	1	
NO or NC Off-Leakage Current (Notes 3, 4)	INO(OFF), INC(OFF)	VCOM = 1V,	$T_A = T_{MIN}$ C, E	-10		10	nA
(110100 0, 1)	110(011)	V_{NO} or $V_{NC} = 4.5V$	to TMAX M	-100		100	
		V+ = 5.5V,	T _A = +25°C	-1	0.01	1	
COM Off-Leakage Current (Notes 3, 4)		$V_{COM} = 1V$, V_{NO} or $V_{NC} = 4.5V$	$T_A = T_{MIN}$ C, E	-10		10	nA
			to T _{MAX} M	-100		100	
COM On-Leakage Current (Notes 3, 4)		V+ = 5.5V, V _{COM} = 1V, 4.5V	T _A = +25°C	-2	0.01	2	
			$T_A = T_{MIN}$ C, E	-20		20	nA
(1.0100 0, 1)			to T _{MAX} M	-200		200	
DIGITAL I/O				•			
Input Logic High	V _{INH}			2.4		V+	V
Input Logic Low	VINL			0		0.8	V
Input Current Logic High or Low	I _{INH} , I _{INL}	V _{IN} = V+, 0		-1	0.03	1	μΑ
SWITCH DYNAMIC CHARACTE	RISTICS			•			
Turn-On Time	ton	$V_{NO} = V_{NC} = 1.5V,$ $V_{IN} = 3V, R_{I} = 1k\Omega,$	T _A = +25°C		16	75	ns
Tam on time	UN	$C_L = 35pF$, Figure 1	$T_A = T_{MIN}$ to T_{MAX}			150	110
Turn-Off Time	torr	$\begin{array}{c} V_{NO} = V_{NC} = 1.5V, \\ V_{IN} = 3V, R_L = 1k\Omega, \\ C_L = 35pF, Figure 1 \end{array}$	T _A = +25°C		10	50	ns
rum-on nine	iOFF		TA = TMIN to TMAX			150	7 115

ELECTRICAL CHARACTERISTICS—+5V Supply (continued)

(V+ = +4.5V to +5.5V, V_{INH} = 2.4V, V_{INL} = 0.8V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 2)

PARAMETER	SYMBOL	COND	MIN	TYP	MAX	UNITS		
SWITCH DYNAMIC CHARACTERISTICS (continued)								
Charge Injection (Note 5)	Q	C_L = 1nF, V_{NO} = 0, R_S = 0 Ω , T_A = +25°C, Figure 2			1	10	рС	
Off-Isolation	V _{ISO}	$R_L = 50\Omega$, $C_L = 15pF$, $f = 100kHz$, $T_A = +25^\circ$		< -100		dB		
NO or NC Off-Capacitance	C _{NO(OFF)} , C _{NC(OFF)}	f = 1MHz, Figure 4		3		pF		
COM Off-Capacitance	CCOM(OFF)	f = 1MHz, Figure 4			3		pF	
COM On-Capacitance	C _{COM} (ON)	f = 1MHz, Figure 4		8		pF		
POWER SUPPLY								
V+ Supply Current	1+	V _{IN} = 0 or V+	T _A = +25°C	-1		1	μΑ	
V + Ouppiy Ourient	'T	VIIV - 0 01 V+	$T_A = T_{MIN}$ to T_{MAX}	-10		10]	

ELECTRICAL CHARACTERISTICS—+12V Supply

 $(V + = +11.4V \text{ to } +12.6V, V_{INH} = 5.0V, V_{INL} = 0.8V, T_A = T_{MIN} \text{ to } T_{MAX}, \text{ unless otherwise noted.}$ Typical values are at $T_A = +25^{\circ}\text{C.}$) (Note 2)

PARAMETER	SYMBOL	CONDITIONS			MIN	TYP	MAX	UNITS
ANALOG SWITCH								
Analog Signal Range	V _{COM} , V _{NO} , V _{NC}				0		V+	V
COM to NO or NC	Ron	V _{COM} = 10V,	T _A = +25°0	0		40	160	Ω
On-Resistance	HON	I _{COM} = 1mA	$T_A = T_{MIN}$	to T _{MAX}			200	52
NO NO Off L L O	1	VCOM = 10V,	T _A = +25°0	0	-5		5	
NO or NC Off-Leakage Current (Notes 3, 4)	INO(OFF), INC(OFF)	V_{NO} or $V_{NC} = 1V$,	TA = TMIN	C, E	-50		50	nA
(140100 0, 1)	$V+ = +12.6V$ to T_{MAX}	М	-500		500			
COM Off Lasters Comment	ICOM(OFF)	V _{COM} = 10V,	V. TA = +25°C		-5		5	
COM Off-Leakage Current (Notes 3, 4)			TA = TMIN	C, E	-50		50	nA
(140100 0, 1)			to T _{MAX}	М	-500		500	
COM On London Comment		V _{COM} = 10V, V+ = +12.6V	T _A = +25°0	0	-10		10	
COM On-Leakage Current (Notes 3, 4)			$T_A = T_{MIN}$	C, E	-100		100	nA
(140100 0, 1)			to TMAX	М	-1000		1000	
DIGITAL I/O								
Input Logic High	VINH				5.0		V+	V
Input Logic Low	V _{INL}			0		0.8	V	
Input Current Logic High or Low	INH, INL	VIN = 0 or V+		-1	0.03	1	μΑ	
POWER SUPPLY	'				•			
V+ Supply Current	1. 101 01	IN = 0 or V+	$T_A = +25^{\circ}C$		-1		1	
v + Supply Current	l+	N	TA = TMIN	to T _{MAX}	-10		10	μΑ

ELECTRICAL CHARACTERISTICS—+3V Supply

(V+ = +3.0V to +3.6V, V_{INH} = 2.4V, V_{INL} = 0.8V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 2)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
ANALOG SWITCH							
Analog Signal Range	V _{COM} , V _{NO} , V _{NC}			0		V+	V
COM to NO or NC On-Resistance	Ron	V _{COM} = 1.5V, I _{COM} = 0.1mA	$T_A = +25^{\circ}C$ $T_A = T_{MIN} \text{ to } T_{MAX}$		175	600 800	Ω
DIGITAL I/O			1	1			
Input Logic High	VINH			2.4		V+	V
Input Logic Low	VINL			0		0.8	V
Input Current Logic High or Low	I _{INH} , I _{INL}	V _{IN} = 0 or V+		-1.00	0.03	1.00	μΑ
SWITCH DYNAMIC CHARACTE	RISTICS			•			
Turn-On Time	ton	$V_{NO} = V_{NC} = 1.5V,$ $V_{IN} = 3V. R_{I} = 1k\Omega.$	T _A = +25°C		45	300	ns
(Note 5)	1011	Figure 1	TA = TMIN to TMAX			500	110
Turn-Off Time	toff	$V_{NO} = V_{NC} = 1.5V,$ $V_{IN} = 3V, R_{L} = 1k\Omega,$	T _A = +25°C		10	125	ns
(Note 5)	TOFF	Figure 1 $TA = TMIN \text{ to } TMAX$				175	113
Charge Injection (Note 5)	Q	$C_L = 1nF, T_A = +25^{\circ}C$, Figure 2		0.5	10	рС
POWER SUPPLY				•			
V+ Supply Current	l+	I+ IN = 0 or V+	T _A = +25°C	-1		1	Δ
v + Supply Current	1+		$T_A = T_{MIN}$ to T_{MAX}	-10	-	10 µA	

Note 2: Algebraic convention is used in this data sheet; the most negative value is shown in the minimum column.


Note 3: Leakage parameters are 100% tested at maximum-rated hot operating temperature, and are guaranteed by correlation at +25°C.


Note 4: SOT and SC70 packaged parts are 100% tested at +25°C. Limits at maximum and minimum rated temperature are guaranteed by design and correlation limits at +25°C.


Note 5: Guaranteed, not production tested.


Typical Operating Characteristics


 $(V+ = +5V, GND = 0, T_A = +25^{\circ}C, unless otherwise noted.)$




















Pin Description

	Р	IN			
MAX4501		501 M		NAME	FUNCTION
SO/DIP	SC70-5/SOT23-5	SO/DIP	SC70-5/SOT23-5		
1	1	1	1	COM	Analog Switch Common Terminal
2, 3, 5	_	2, 3, 5	_	N.C.	No Connection. Not internally connected.
4	5	4	5	V+	Positive Supply-Voltage Input (analog and digital)
6	4	6	4	IN	Digital Control Input
7	3	7	3	GND	Ground
8	2		_	NO	Analog Switch (normally open)
_	_	8	2	NC	Analog Switch (normally closed)

Note: NO, NC, and COM pins are identical and interchangeable. Any may be considered as an input or an output; signals pass equally well in both directions.

Applications Information

Power-Supply Considerations

The MAX4501/MAX4502 are constructed like most CMOS analog switches, except they have only two supply pins: V+ and GND. V+ and GND drive the internal CMOS switches and set the analog voltage limits of the switch. Reverse ESD-protection diodes are internally connected between each analog signal pin and both V+ and GND. One of these diodes conducts if any analog signal exceeds V+ or GND. During normal operation, these and other reverse-biased ESD diodes leak, forming the only current drawn from V+ or GND.

Virtually all the analog leakage current comes from the ESD diodes. Although the ESD diodes on a given signal pin are identical and therefore fairly well balanced, they are reverse biased differently. Each is biased by either V+ or GND and the analog signal. This means their leakages will vary as the signal varies. The difference in the two diode leakages to the V+ and GND pins constitutes the analog signal-path leakage current. All analog leakage current flows between each pin and one of the supply terminals, not to the other switch terminal. This is why both sides of a given switch can show leakage currents of the same or opposite polarity.

There is no connection between the analog-signal paths and V+ or GND.

V+ and GND also power the internal logic and logic-level translators, and set the input logic limits. The logic-level translators convert the logic levels to switched V+ and GND signals to drive the analog signals

nal gates. This drive signal is the only connection between the logic supplies (and signals) and the analog supplies. COM, NO, and NC pins have ESD-protection diodes to V+ and GND.

The logic-level thresholds are CMOS/TTL compatible when V+ is +5V. As V+ rises, the threshold increases slightly. When V+ reaches +12V, the logic-level threshold is about 3V—above the TTL guaranteed high-level minimum of 2.8V, but still compatible with CMOS outputs.

Do not connect the MAX4501/MAX4502's V+ pin to +3V and then connect the logic-level pins to TTL logic-level signals. TTL levels can exceed +3V and violate the absolute maximum ratings, damaging the part and/or external circuits.

High-Frequency Performance

In 50Ω systems, signal response is reasonably flat up to 250MHz (see *Typical Operating Characteristics*). Above 20MHz, the on-response has several minor peaks that are highly layout dependent. The problem is not in turning the switch on; it's in turning it off. The offstate switch acts like a capacitor and passes higher frequencies with less attenuation. At 10MHz, off-isolation is about -60dB in 50Ω systems, decreasing approximately 20dB per decade as frequency increases. Higher circuit impedances also cause off-isolation to decrease. Adjacent channel attenuation is about 3dB above that of a bare IC socket, and is due entirely to capacitive coupling.

Test Circuits/Timing Diagrams

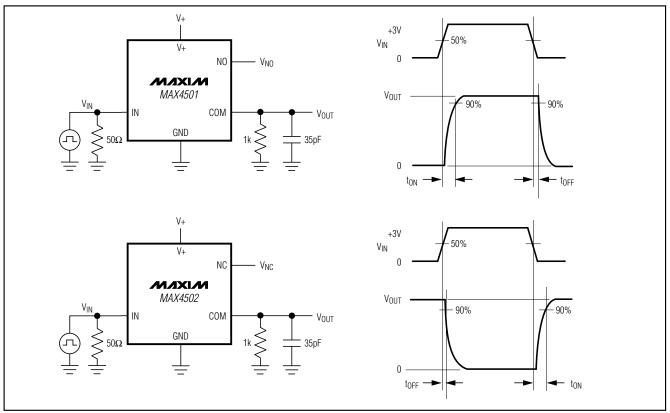


Figure 1. Switching Times

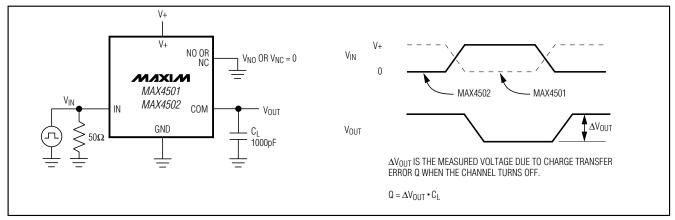


Figure 2. Charge Injection

Test Circuits/Timing Diagrams (continued)

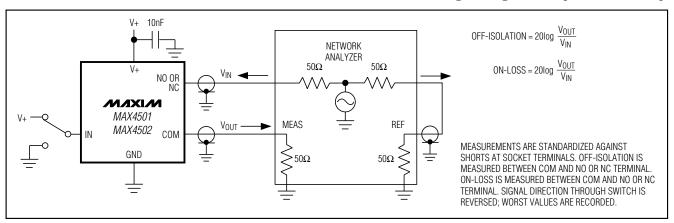


Figure 3. Off-Isolation and On-Loss





Figure 4. NO, NC, and COM Capacitance

Ordering Information (continued)

PART	TEMP. RANGE	PIN- PACKAGE	TOP MARK	
MAX4502CUK-T	0°C to +70°C	5 SOT23-5	AAAB	
MAX4502CSA	0°C to +70°C	8 SO	_	
MAX4502CPA	0°C to +70°C	8 Plastic DIP	_	
MAX4502C/D	0°C to +70°C	Dice*	_	
MAX4502EXK-T	-40°C to +85°C	5 SC70-5	AAF	
MAX4502EUK-T	-40°C to +85°C	5 SOT23-5	AAAB	
MAX4502ESA	-40°C to +85°C	8 SO	_	
MAX4502EPA	-40°C to +85°C	8 Plastic DIP	_	
MAX4502MJA	-55°C to +125°C	8 CERDIP**	_	

_Chip Topography



TRANSISTOR COUNT: 17
SUBSTRATE CONNECTED TO V+

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

^{*}Contact factory for dice specifications.

^{**}Contact factory for availability.