

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








Schottky Barrier Rectifier MBRF30150CT, 2x 15A, 150V, ITO-220AB, Common Cathode


MBRF30150CT





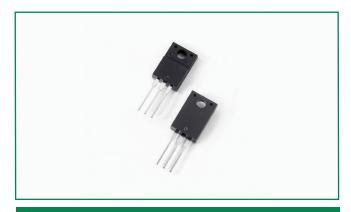

Pin out



Description

Littelfuse MBR series Schottky Barrier Rectifier is designed to meet the general requirements of commercial applications by providing high temperature, low leakage and low V_F products.

It is suitable for high frequency switching mode power supply, free-wheeling diodes and polarity protection diodes.

Features

- High junction temperature capability
- Guard ring for enhanced ruggedness and long term reliability
- Low forward voltage drop
- High frequency operation
- Common cathode configuration in electrically isolated ITO-220AB package

Applications

- Switching mode power supply
- Free-wheeling diodes
- DC/DC converters
- Polarity protection diodes

Maximum Ratings

Parameters	Symbol	Test Conditions	Max	Unit
Peak Inverse Voltage	V _{RWM}	-	150	V
Average Forward Current	I _{F(AV)}	50% duty cycle @T _C = 133°C, rectangular wave form	15 (per leg)	А
			30 (total device)	
Peak Repetitive Forward Current(per leg)	I _{FRM}	Rated V_R square wave, 20KHz $T_C = 133^{\circ}C$	20	А
Peak One Cycle Non-Repetitive Surge Current (per leg)	I _{FSM}	Surge applied at rated load conditions halfwave, single phase,60Hz	150	А

Electrical Characteristics

Parameters	Symbol	Test Conditions	Max	Unit	
Forward Voltage Drop (per leg) *	V _{F1}	@ 15A, Pulse, T _J = 25 °C	1.00	V	
Forward voltage Drop (per leg) "	V _{F2}	@ 15A, Pulse, T _J = 125 °C	0.80		
Reverse Current (per leg) *	I _{R1}	$@V_R = rated V_R T_J = 25 °C$	1.0	mA	
	I _{R2}	$@V_R = rated V_R T_J = 125 ^{\circ}C$	6.0		
Junction Capacitance (per leg)	C _T	$@V_R = 5V, T_C = 25 ^{\circ}C f_{SIG} = 1MHz$	400	pF	
Series Inductance (per leg)	L _s	Measured lead to lead 5 mm from package body	8.0	nH	
Voltage Rate of Change	dv/dt		10,000	V/µs	
RSM Isolation Voltage (t = 1.0 second, R. H. < =30%, T _A = 25 °C)	. H. < =30%, V _{ISO}	Clip mounting, the epoxy body away from the heatsink edge by more than 0.110" along the lead direction.	4500		
		Clip mounting, the epoxy body is inside the heatsink.	3500	V	
		Screw mounting, the epoxy body is inside the heatsink.	1500		

^{*} Pulse Width < 300µs, Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters	Symbol	Test Conditions	Max	Unit
Junction Temperature	T _J	T,		°C
Storage Temperature	T _{stg}		-55 to +150	°C
Maximum Thermal Resistance Junction to Case	R _{thJC}	DC operation	2.0	°C/W
Maximum Thermal Resistance, Case to Heat Sink	R _{thJA}	DC operation	60	°C/W
Maximum Thermal Resistance, Case to Heat Sink	R _{thCS}	Mounting surface, smooth and greased	0.5	°C/W
Approximate Weight	wt		2	g
Case Style	ITO-220AB			

Figure 1: Typical Forward Characteristics

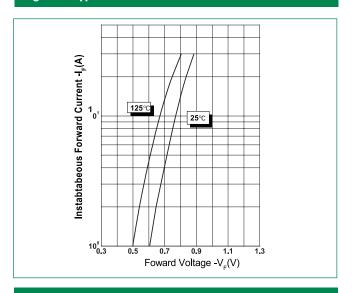


Figure 3: Typical Junction Capacitance



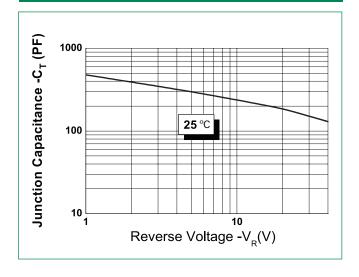


Figure 2: Typical Reverse Characteristics



Schottky Barrier Rectifier MBRF30150CT, 2x 15A, 150V, ITO-220AB, Common Cathode


Dimensions-ITO-220AB

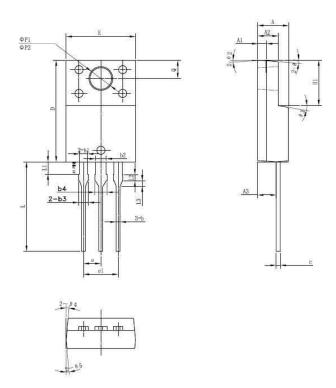


Symbol	Millimeters			
Syrribor	Min	Тур	Max	
Α	4.30	4.50	4.70	
A1	1.10	1.30	1.50	
A2	2.80	3.00	3.20	
А3	2.50	2.70	2.90	
b	0.50	0.60	0.75	
b1	1.10	1.20	1.35	
b2	1.50	1.60	1.75	
b3	1.20	1.30	1.45	
b4	1.60	1.70	1.85	
С	0.55	0.60	0.75	
D	14.80	15.00	15.20	
E	9.96	10.16	10.36	
е		2.55		
e1		5.10		
H1	6.50	6.70	6.90	
L	12.70	13.20	13.70	
L1	1.60	1.80	2.00	
L2	0.80	1.00	1.20	
L3	0.60	0.80	1.00	
ØP1	3.30	3.50	3.70	
ØP2	2.99	3.19	3.39	
Q	2.50	2.70	2.90	
θ1		5°		
θ2		4°		
θ3		10°		
θ 4		5°		
θ 5		5°		

Packing OptionsPart NumberMarkingPacking ModeM.O.QMBRF30150CTMBRF30150CT50pcs / Tube1000

Tube Specification



Part Numbering and Marking System



 MBR
 = Device Type

 F
 = Package type

 30
 = Forward Current (30A)

 150
 = Reverse Voltage (150V)

 CT
 = Configuration

CF = Littelfuse
YY = Year
WW = Week
L = Lot Number