imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




MBRF30200CT

ittelfuse

Expertise Applied | Answers Delivered

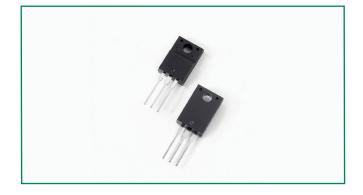

Pin out



Description

Littelfuse MBR series Schottky Barrier Rectifier is designed to meet the general requirements of commercial applications by providing high temperature, low leakage and low $V_{\rm F}$ products.

It is suitable for high frequency switching mode power supply, free-wheeling diodes and polarity protection diodes.

Features

- High junction temperature capability
- Guard ring for enhanced ruggedness and long term reliability
- High frequency operation

RoHS PO

- Common cathode configuration in electrically isolated ITO-220AB package
- Low forward voltage drop

Applications

- Switching mode power supply
- Free-wheeling diodes
- DC/DC converters
- Polarity protection diodes

Maximum Ratings

Parameters	Symbol	Test Conditions	Max	Unit
Peak Inverse Voltage	V _{RVVM}	-	200	V
Average Forward Current	I _{F(AV)}	50% duty cycle @T _c = 133°C, rectangular wave form	15 (per leg)	A
			30 (total device)	
Peak Repetitive Forward Current(per leg)	I _{FRM}	Rated V_{R} square wave, 20KHz T_{C} = 133°C	20	A
Peak One Cycle Non-Repetitive Surge Current (per leg)	I _{FSM}	Surge applied at rated load conditions halfwave, single phase,60Hz	150	А

Electrical Characteristics

Parameters	Symbol	Test Conditions	Max	Unit
Forward Voltage Drop (per leg) *	V _{F1}	@ 15A, Pulse, T _J = 25 °C	0.90	V
	V _{F2}	@ 15A, Pulse, T _J = 125 °C	0.75	
Reverse Current (per leg) *	I _{R1}	$@V_{R} = rated V_{R}T_{J} = 25 \text{ °C}$	1.0	mA
	I _{R2}	$@V_{R} = rated V_{R}T_{J} = 125 \text{ °C}$	6.0	
Junction Capacitance (per leg)	C _T	$@V_{R} = 5V, T_{C} = 25 \text{ °C } f_{SIG} = 1MHz$	400	pF
Voltage Rate of Change	dv/dt		10,000	V/µs
RSM Isolation Voltage		Clip mounting, the epoxy body away from the heatsink edge by more than 0.110" along the lead direction.	4500	
$(t = 1.0 \text{ second}, R. H. < =30\%, T_A = 25 °C)$	V _{ISO}	Clip mounting, the epoxy body is inside the heatsink.	3500	V
		Screw mounting, the epoxy body is inside the heatsink.	1500	

* Pulse Width < 300µs, Duty Cycle <2%

T1		
I nermai-iv	iechanical S	pecifications

Parameters	Symbol	Test Conditions	Max	Unit
Junction Temperature	TJ		-55 to +150	°C
Storage Temperature	T _{stg}		-55 to +150	°C
Maximum Thermal Resistance Junction to Case (per leg)	R _{thJC}	DC operation	3.5	°C/W
Approximate Weight	wt		2	g
Case Style	ITO-220AB			

Figure 1: Typical Forward Characteristics

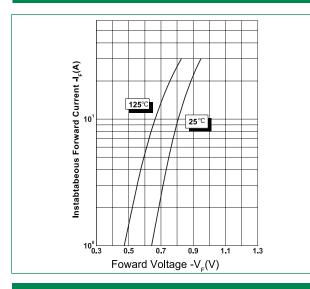


Figure 3: Typical Junction Capacitance



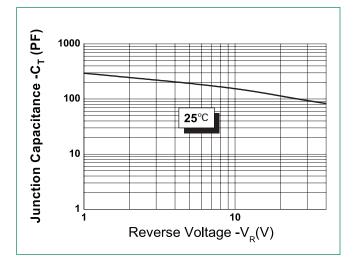


Figure 2: Typical Reverse Characteristics



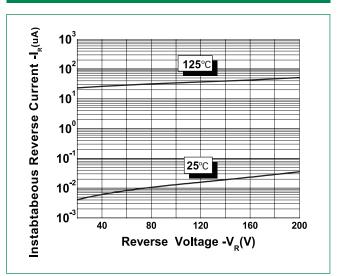


Dimensions- ITO-220AB

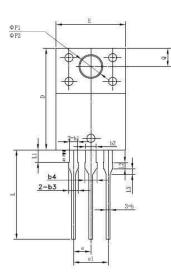

64

. 85

ար ար ար

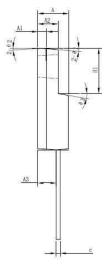

Symbol	Millimeters			
Symbol	Min	Тур	Max	
Α	4.30	4.50	4.70	
A1	1.10	1.30	1.50	
A2	2.80	3.00	3.20	
A3	2.50	2.70	2.90	
b	0.50	0.60	0.75	
b1	1.10	1.20	1.35	
b2	1.50	1.60	1.75	
b3	1.20	1.30	1.45	
b4	1.60	1.70	1.85	
C	0.55	0.60	0.75	
D	14.80	15.00	15.20	
E	9.96	10.16	10.36	
e		2.55		
e1		5.10		
H1	6.50	6.70	6.90	
L	12.70	13.20	13.70	
L1	1.60	1.80	2.00	
L2	0.80	1.00	1.20	
L3	0.60	0.80	1.00	
ØP1	3.30	3.50	3.70	
ØP2	2.99	3.19	3.39	
Q	2.50	2.70	2.90	
θ1		5°		
θ 2		4°		
θ 3		10°		
θ 4		5°		
θ5		5°		

Part Numbering and Marking System

MBR


F 30


200 СТ

LF YY

ww

L

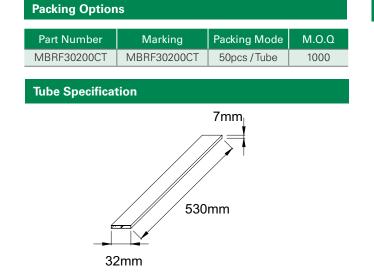



- = Device Type

 - = Package type = Forward Current (30A) = Reverse Voltage (200V)
 - = Configuration
- = Littelfuse
- = Year = Week
- = Lot Number