

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








Schottky Barrier Rectifier MBRF3060CT 2x 15A, 60V, ITO-220AB, Common Cathode


MBRF3060CT







Pin out



Description

Littelfuse MBR series Schottky Barrier Rectifier is designed to meet the general requirements of commercial applications by providing high temperature, low leakage and low $V_{\scriptscriptstyle E}$ products.

It is suitable for high frequency switching mode power supply, free-wheeling diodes and polarity protection diodes.

Features

- High junction temperature capability
- Guard ring for enhanced ruggedness and long term reliability
- Low forward voltage drop
- High frequency operation
- Common cathode configuration in electrically isolated ITO-220AB package
- **Applications**
- Switching mode power supply
- Free-wheeling diodes
- DC/DC converters
- Polarity protection diodes

Maximum Ratings

Parameters	Symbol	Test Conditions	Max	Unit
Peak Inverse Voltage	V _{RWM}	-	60	V
Average Forward Current	I _{F(AV)}	50% duty cycle @T _c = 95°C, rectangular wave form	15 (per leg)	- A
			30 (total device)	
Peak One Cycle Non-Repetitive Surge Current (per leg)	I _{FSM}	8.3 ms, half Sine pulse	200	А

Electrical Characteristics

Parameters	Symbol	Test Conditions	Max	Unit	
Forward Valtage Drep (per leg) *	V _{F1}	@ 15A, Pulse, T _J = 25 °C	0.70	V	
Forward Voltage Drop (per leg) *	V _{F2}	@ 15A, Pulse, T _J = 125 °C	0.67	V	
Reverse Current (per leg) *	I _{R1}	$@V_R = rated V_R T_J = 25 °C$	1.0	mA	
	I _{R2}	$@V_R = rated V_R T_J = 125 ^{\circ}C$	100	IIIA	
Junction Capacitance (per leg)	C _T	$@V_R = 5V, T_C = 25 ^{\circ}C f_{SIG} = 1MHz$	700	pF	
Typical Series Inductance (per leg)	L _s	Measured lead to lead 5 mm from package body	8.0	nH	
Voltage Rate of Change	dv/dt		10,000	V/µs	
RSM Isolation Voltage	RSM Isolation Voltage	Clip mounting, the epoxy body away from the heatsink edge by more than 0.110" along the lead direction.	4500		
$(t = 1.0 \text{ second}, R. H. < = 30\%, T_A = 25 °C)$	V _{ISO}	Clip mounting, the epoxy body is inside the heatsink.	3500	V	
		Screw mounting, the epoxy body is inside the heatsink.	1500		

^{*} Pulse Width < 300µs, Duty Cycle <2%

Schottky Barrier Rectifier MBRF3060CT 2x 15A, 60V, ITO-220AB, Common Cathode

Thermal-Mechanical Specifications

Parameters	Symbol	Test Conditions	Max	Unit
Junction Temperature	T _J		-55 to +150	°C
Storage Temperature	T _{stg}		-55 to +150	°C
Maximum Thermal Resistance Junction to Case	R _{thJC}	DC operation	3.0	°C/W
Maximum Thermal Resistance, Case to Heat Sink	R _{thJA}	DC operation	60	°C/W
Approximate Weight	wt		2	g
Case Style	ITO-220AB			

Figure 1: Typical Forward Characteristics




Figure 3: Typical Junction Capacitance



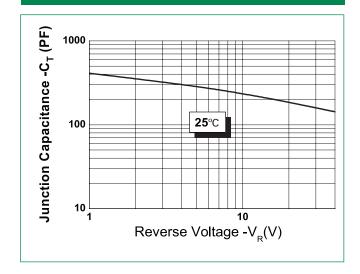



Figure 2: Typical Reverse Characteristics



Schottky Barrier Rectifier MBRF3060CT 2x 15A, 60V, ITO-220AB, Common Cathode

Dimensions-ITO-220AB








Symbol	Millimeters			
Зуптьог	Min	Тур	Max	
Α	4.30	4.50	4.70	
A1	1.10	1.30	1.50	
A2	2.80	3.00	3.20	
А3	2.50	2.70	2.90	
b	0.50	0.60	0.75	
b1	1.10	1.20	1.35	
b2	1.50	1.60	1.75	
b3	1.20	1.30	1.45	
b4	1.60	1.70	1.85	
С	0.55	0.60	0.75	
D	14.80	15.00	15.20	
E	9.96	10.16	10.36	
е	-	2.55	-	
e1	-	5.10	-	
H1	6.50	6.70	6.90	
L	12.70	13.20	13.70	
L1	1.60	1.80	2.00	
L2	0.80	1.00	1.20	
L3	0.60	0.80	1.00	
ØP1	3.30	3.50	3.70	
ØP2	2.99	3.19	3.39	
Q	2.50	2.70	2.90	
θ1	-	5°	-	
θ2	-	4°	-	
θ3	-	10°	-	
θ 4		5°	-	
θ 5	-	5°		


Packing Options

Part Number	Marking	Packing Mode	M.O.Q	
MBRF3060CT	MBRF3060CT	50pcs / Tube	1000	

Tube Specification



Part Numbering and Marking System



MBR = Device Type
F = Package type
30 = Forward Current (30A)
60 = Reverse Voltage (60V)

T = Configuration
= Littelfuse
Y = Year
W = Week
= Lot Number