

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







# Hex Schmitt-Trigger Inverter

# **High-Performance Silicon-Gate CMOS**


The MC74HC14A is identical in pinout to the LS14, LS04 and the HC04. The device inputs are compatible with Standard CMOS outputs; with pullup resistors, they are compatible with LSTTL outputs.

The HC14A is useful to "square up" slow input rise and fall times. Due to hysteresis voltage of the Schmitt trigger, the HC14A finds applications in noisy environments.

# **Features**

- Output Drive Capability: 10 LSTTL Loads
- Outputs Directly Interface to CMOS, NMOS and TTL
- Operating Voltage Range: 2.0 to 6.0 V
- Low Input Current: 1.0 μA
- High Noise Immunity Characteristic of CMOS Devices
- In Compliance With the JEDEC Standard No. 7.0 A Requirements
- Chip Complexity: 60 FETs or 15 Equivalent Gates
- NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

# LOGIC DIAGRAM

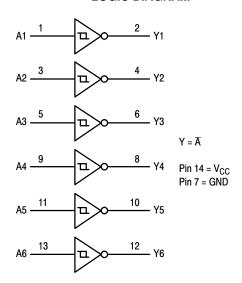



# ON Semiconductor®


http://onsemi.com






SOIC-14 NB D SUFFIX CASE 751A TSSOP-14 DT SUFFIX CASE 948G

#### **PIN ASSIGNMENT**



14-Lead (Top View)

# **MARKING DIAGRAMS**





SOIC-14 NB

A = Assembly Location
L, WL = Wafer Lot
Y, YY = Year
W. WW = Work Week

G or ■ = Pb-Free Package

(Note: Microdot may be in either location)

# **FUNCTION TABLE**

Outputs
Υ
Н
L

# **ORDERING INFORMATION**

See detailed ordering and shipping information in the package dimensions section on page 5 of this data sheet.

#### **MAXIMUM RATINGS**

Symbol	Parameter	Value	Unit
V <sub>CC</sub>	DC Supply Voltage (Referenced to GND)	-0.5 to +7.0	V
V <sub>in</sub>	DC Input Voltage (Referenced to GND)	$-0.5$ to $V_{CC}$ + 0.5	V
V <sub>out</sub>	DC Output Voltage (Referenced to GND)	$-0.5$ to $V_{CC}$ + 0.5	V
l <sub>in</sub>	DC Input Current, per Pin	±20	mA
I <sub>out</sub>	DC Output Current, per Pin	±25	mA
I <sub>CC</sub>	DC Supply Current, V <sub>CC</sub> and GND Pins	±50	mA
P <sub>D</sub>	Power Dissipation in Still Air, SOIC Package† TSSOP Package†	500 450	mW
T <sub>stg</sub>	Storage Temperature Range	-65 to +150	°C
T <sub>L</sub>	Lead Temperature, 1 mm from Case for 10 Seconds Plastic DIP, SOIC or TSSOP Package	260	°C

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation,  $V_{in}$  and  $V_{out}$  should be constrained to the range GND  $\leq$  ( $V_{in}$  or  $V_{out}$ )  $\leq$   $V_{CC}$ .

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or  $V_{CC}$ ). Unused outputs must be left open.

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

†Derating: ŚOIC Package: -7 mW/°C from 65° to 125°C TSSOP Package: -6.1 mW/°C from 65° to 125°C

#### RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
V <sub>CC</sub>	DC Supply Voltage (Referenced to GND)	2.0	6.0	V
V <sub>in</sub> , V <sub>out</sub>	DC Input Voltage, Output Voltage (Referenced to GND)	0	V <sub>CC</sub>	V
T <sub>A</sub>	Operating Temperature Range, All Package Types	-55	+125	°C
t <sub>r</sub> , t <sub>f</sub>	Input Rise/Fall Time $ V_{CC} = 2.0 \\ (Figure 1) \\ V_{CC} = 4.5 \\ V_{CC} = 6.0 \\$	V 0	No Limit* No Limit* No Limit*	ns

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

<sup>\*</sup>When  $V_{in} = 50\% V_{CC}$ ,  $I_{CC} > 1mA$ 

# DC CHARACTERISTICS (Voltages Referenced to GND)

			Vcc	Guaranteed Limit				
Symbol	Parameter	Condition		V	–55 to 25°C	≤85°C	≤125°C	Unit
V <sub>T+</sub> max	Maximum Positive-Going Input Threshold Voltage (Figure 3)	$V_{out} = 0.1V$ $ I_{out}  \le 20\mu A$		2.0 3.0 4.5 6.0	1.50 2.15 3.15 4.20	1.50 2.15 3.15 4.20	1.50 2.15 3.15 4.20	٧
V <sub>T+</sub> min	Minimum Positive-Going Input Threshold Voltage (Figure 3)	$V_{out} = 0.1V$ $ I_{out}  \le 20\mu A$		2.0 3.0 4.5 6.0	1.0 1.5 2.3 3.0	0.95 1.45 2.25 2.95	0.95 1.45 2.25 2.95	V
V <sub>T-</sub> max	Maximum Negative–Going Input Threshold Voltage (Figure 3)	$\begin{aligned} V_{out} &= V_{CC} - 0.1V \\  I_{out}  &\leq 20 \mu A \end{aligned}$		2.0 3.0 4.5 6.0	0.9 1.4 2.0 2.6	0.95 1.45 2.05 2.65	0.95 1.45 2.05 2.65	V
V <sub>T</sub> min	Minimum Negative-Going Input Threshold Voltage (Figure 3)	$\begin{aligned} V_{out} &= V_{CC} - 0.1V \\  I_{out}  &\leq 20 \mu A \end{aligned}$		2.0 3.0 4.5 6.0	0.3 0.5 0.9 1.2	0.3 0.5 0.9 1.2	0.3 0.5 0.9 1.2	٧
V <sub>H</sub> max (Note 1)	Maximum Hysteresis Voltage (Figure 3)	$V_{out} = 0.1V \text{ or } V_{CC} - 0$ $ I_{out}  \le 20\mu\text{A}$	D.1V	2.0 3.0 4.5 6.0	1.20 1.65 2.25 3.00	1.20 1.65 2.25 3.00	1.20 1.65 2.25 3.00	٧
V <sub>H</sub> min (Note 1)	Minimum Hysteresis Voltage (Figure 3)	$V_{out} = 0.1V \text{ or } V_{CC} - 0$ $ I_{out}  \le 20 \mu A$	0.1V	2.0 3.0 4.5 6.0	0.20 0.25 0.40 0.50	0.20 0.25 0.40 0.50	0.20 0.25 0.40 0.50	V
V <sub>OH</sub>	Minimum High-Level Output Voltage	$V_{in} \le V_{T-} min$ $ I_{out}  \le 20\mu A$	1.24.4	2.0 4.5 6.0	1.9 4.4 5.9	1.9 4.4 5.9	1.9 4.4 5.9	٧
		I <sub>c</sub>	$_{\text{out}}$   $\leq$ 2.4mA $_{\text{out}}$   $\leq$ 4.0mA $_{\text{out}}$   $\leq$ 5.2mA	3.0 4.5 6.0	2.48 3.98 5.48	2.34 3.84 5.34	2.20 3.70 5.20	
V <sub>OL</sub>	Maximum Low–Level Output Voltage	$V_{in} \ge V_{T+} \max$ $ I_{out}  \le 20\mu A$		2.0 4.5 6.0	0.1 0.1 0.1	0.1 0.1 0.1	0.1 0.1 0.1	V
		l <sub>e</sub>  l <sub>e</sub>	000000000000000000000000000000000000	3.0 4.5 6.0	0.26 0.26 0.26	0.33 0.33 0.33	0.40 0.40 0.40	
l <sub>in</sub>	Maximum Input Leakage Current	$V_{in} = V_{CC}$ or GND		6.0	±0.1	±1.0	±1.0	μΑ
I <sub>CC</sub>	Maximum Quiescent Supply Current (per Package)	$V_{in} = V_{CC}$ or GND $I_{out} = 0\mu A$		6.0	1.0	10	40	μΑ

<sup>1.</sup>  $V_H min > (V_{T_+} min) - (V_{T_-} max); V_H max = (V_{T_+} max) - (V_{T_-} min).$ 

# **AC CHARACTERISTICS** ( $C_L = 50pF$ , Input $t_r = t_f = 6ns$ )

	Parameter	V <sub>CC</sub>	Guaranteed Limit			
Symbol		v	–55 to 25°C	≤85°C	≤125°C	Unit
t <sub>PLH</sub> ,	Maximum Propagation Delay, Input A or B to Output Y	2.0	75	95	110	ns
t <sub>PHL</sub>	(Figures 1 and 2)	3.0	30	40	55	
		4.5	15	19	22	
		6.0	13	16	19	
t <sub>TLH</sub> ,	Maximum Output Transition Time, Any Output	2.0	75	95	110	ns
t <sub>THL</sub>	(Figures 1 and 2)	3.0	27	32	36	
		4.5	15	19	22	
		6.0	13	16	19	
C <sub>in</sub>	Maximum Input Capacitance		10	10	10	рF
·			Typical @ 25°C, V <sub>CC</sub> = 5.0 V			
$C_{PD}$	Power Dissipation Capacitance (Per Inverter)*			22		рF

<sup>\*</sup> Used to determine the no-load dynamic power consumption: P<sub>D</sub> = C<sub>PD</sub> V<sub>CC</sub><sup>2</sup>f + I<sub>CC</sub> V<sub>CC</sub>.


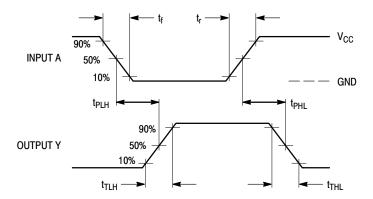


Figure 1. Switching Waveforms



\*Includes all probe and jig capacitance

Figure 2. Test Circuit


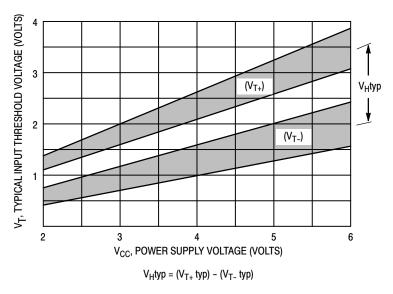


Figure 3. Typical Input Threshold,  $V_{T_{+}}$ ,  $V_{T_{-}}$  versus Power Supply Voltage

A — 12 — Y

(a) A Schmitt-Trigger Squares Up Inputs With Slow Rise and Fall Times

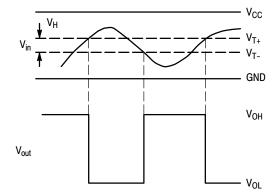

(b) A Schmitt-Trigger Offers Maximum Noise Immunity

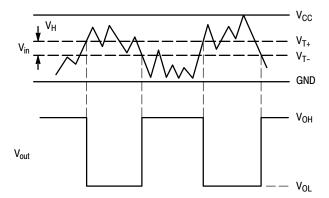


Figure 4. Typical Schmitt-Trigger Applications

# **ORDERING INFORMATION**


Device	Package	Shipping <sup>†</sup>
MC74HC14ADG	SOIC-14 NB (Pb-Free)	55 Units / Rail
MC74HC14ADR2G	SOIC-14 NB (Pb-Free)	2500 / Tape & Reel
MC74HC14ADTG	TSSOP-14 (Pb-Free)	96 Units / Rail
MC74HC14ADTR2G	TSSOP-14 (Pb-Free)	2500 / Tape & Reel
NLV74HC14ADG*	SOIC-14 NB (Pb-Free)	55 Units / Rail
NLV74HC14ADR2G*	SOIC-14 NB (Pb-Free)	2500 / Tape & Reel
NLV74HC14ADTG*	TSSOP-14 (Pb-Free)	96 Units / Rail
NLV74HC14ADTR2G*	TSSOP-14 (Pb-Free)	2500 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

<sup>\*</sup>NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable

# PACKAGE DIMENSIONS

# TSSOP-14 CASE 948G ISSUE B

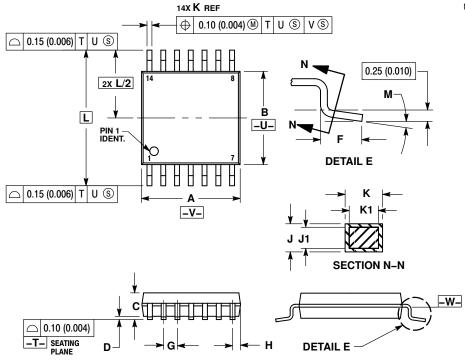

- NOTES:
  1. DIMENSIONING AND TOLERANCING PER

  - 1. DIMENSIONING AND TOLEHANCING PER ANSI Y14.5M, 1982.
    2. CONTROLLING DIMENSION: MILLIMETER.
    3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.

  - EXCEED 0.15 (0.006) PER SIDE.

    4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.

    5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.


    6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.

  - REFERENCE ONLY.

    7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE –W–.

	MILLIN	IETERS	INC	HES	
DIM	MIN	MAX	MIN	MAX	
Α	4.90	5.10	0.193	0.200	
В	4.30	4.50	0.169	0.177	
С		1.20		0.047	
D	0.05	0.15	0.002	0.006	
F	0.50	0.75	0.020	0.030	
G	0.65	BSC	0.026 BSC		
Н	0.50	0.60	0.020	0.024	
J	0.09	0.20	0.004	0.008	
J1	0.09	0.16	0.004	0.006	
Κ	0.19	0.30	0.007	0.012	
K1	0.19	0.25	0.007	0.010	
L	6.40	BSC	0.252 BSC		
М	0 °	8 °	0 °	8 °	

# **SOLDERING FOOTPRINT\***

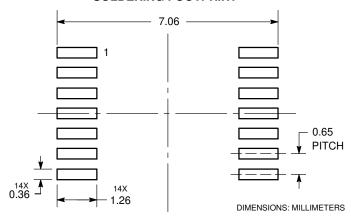



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.


## PACKAGE DIMENSIONS

# SOIC-14 NB

CASE 751A-03

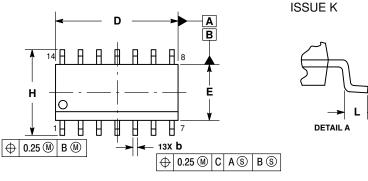





#### NOTES

- OTES.


  1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.

  2. CONTROLLING DIMENSION: MILLIMETERS.
- 2. CONTROLLING DIMENSION: MILLIMETERS.
  3. DIMENSION & DOES NOT INCLUDE DAMBAR
  PROTRUSION. ALLOWABLE PROTRUSION
  SHALL BE 0.13 TOTAL IN EXCESS OF AT
  MAXIMUM MATERIAL CONDITION.
  4. DIMENSIONS D AND E DO NOT INCLUDE
  MOLD PROTRUSIONS.

  MAXIMUM BARGES DESCRIPTION A 15 DESCRIPTION
  MATERIAL CONDITION A 15 DESCRIPTION A 15 DESCRIPTION
  MATERIAL DESCRIPTION A 15 DESCRIPTION
  MATERIAL DESCRIPTION A 15 DESCRIPTION A 15 DESCRIPTION
  MATERIAL DESCRIPTION
  M
- 5. MAXIMUM MOLD PROTRUSION 0.15 PER SIDE

	MILLIMETERS		INC	HES
DIM	MIN	MAX	MIN	MAX
Α	1.35	1.75	0.054	0.068
A1	0.10	0.25	0.004	0.010
A3	0.19	0.25	0.008	0.010
b	0.35	0.49	0.014	0.019
D	8.55	8.75	0.337	0.344
E	3.80	4.00	0.150	0.157
е	1.27	BSC	0.050 BSC	
Н	5.80	6.20	0.228	0.244
h	0.25	0.50	0.010	0.019
L	0.40	1.25	0.016	0.049
M	0 °	7°	0 °	7°

#### SOLDERING FOOTPRINT\*

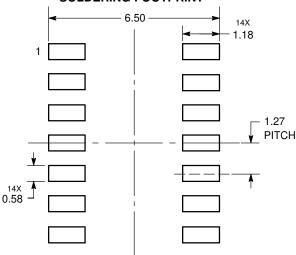

**DIMENSIONS: MILLIMETERS** 

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and the in are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights of others. SCILLC products are not designed, intended, a support or customic in sustance in or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

# **PUBLICATION ORDERING INFORMATION**

# LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA

**Phone**: 303–675–2175 or 800–344–3860 Toll Free USA/Canada **Fax**: 303–675–2176 or 800–344–3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative