

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







# 100 mA Positive Voltage Regulators

The MC78L00A Series of positive voltage regulators are inexpensive, easy-to-use devices suitable for a multitude of applications that require a regulated supply of up to 100 mA. Like their higher powered MC7800 and MC78M00 Series cousins, these regulators feature internal current limiting and thermal shutdown making them remarkably rugged. No external components are required with the MC78L00 devices in many applications.

These devices offer a substantial performance advantage over the traditional zener diode–resistor combination, as output impedance and quiescent current are substantially reduced.

### **Features**

- Wide Range of Available, Fixed Output Voltages
- Low Cost
- Internal Short Circuit Current Limiting
- Internal Thermal Overload Protection
- No External Components Required
- Complementary Negative Regulators Offered (MC79L00A Series)
- NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These are Pb-Free Devices


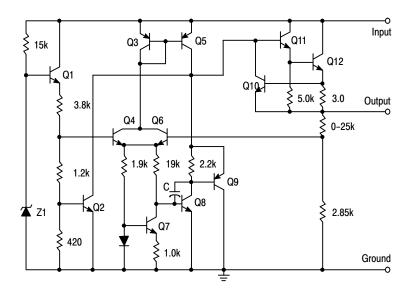


Figure 1. Representative Schematic Diagram



### ON Semiconductor®

### www.onsemi.com






SOIC-8\* D SUFFIX CASE 751



SOT-89 CASE 528AG

\*SOIC-8 is an internally modified SO-8 package. Pins 2, 3, 6, and 7 are electrically common to the die attach flag. This internal lead frame modification decreases package thermal resistance and increases power dissipation capability when appropriately mounted on a printed circuit board. SOIC-8 conforms to all external dimensions of the standard SO-8 package.

### **PIN CONNECTIONS**



### **ORDERING INFORMATION**

See detailed ordering and shipping information in the package dimensions section on page 9 of this data sheet.

#### **DEVICE MARKING INFORMATION**

See general marking information in the device marking section on page 12 of this data sheet.




Figure 2. Standard Application

A common ground is required between the input and the output voltages. The input voltage must remain typically 2.0 V above the output voltage even during the low point on the input ripple voltage.

- \* C<sub>in</sub> is required if regulator is located an appreciable distance from power supply filter.
- \*\*  $C_{O}^{\text{ii}}$  is not needed for stability; however, it does improve transient response.

#### **ABSOLUTE MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
Input Voltage (5.0 V–9.0 V) (12 V–18 V) (24 V)	V <sub>I</sub>	30 35 40	Vdc
Storage Temperature Range	T <sub>stg</sub>	-65 to +150	°C
Maximum Junction Temperature	T <sub>J</sub>	150	°C
Moisture Sensitivity Level	MSL	1	-
ESD Capability, Human Body Model (Note 1)	ESD <sub>HBM</sub>	2000	V
ESD Capability, Machine Model (Note 1)	ESD <sub>MM</sub>	200	V
ESD Capability, Charged Device Model (Note 1)	ESD <sub>CDM</sub>	2000	V

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 1. This device series incorporates ESD protection and is tested by the following methods:
  - ESD Human Body Model tested per AEC-Q100-002 (EIA/JESD22-A114)
  - ESD Machine Model tested per AEC-Q100-003 (EIA/JESD22-A115)
  - ESD Charged Device Model tested per EIA/JES D22/C101, Field Induced Charge Model.

### THERMAL CHARACTERISTICS

Rating	Symbol	Value	Unit
Package Dissipation	PD	Internally Limited	W
Thermal Characteristics, TO–92 Thermal Resistance, Junction–to–Ambient	$R_{\theta JA}$	200	°C/W
Thermal Characteristics, SOIC8 Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	Refer to Figure 8	°C/W
Thermal Characteristics, SOT–89 Thermal Resistance, Junction–to–Ambient	$R_{ heta JA}$	55	°C/W

<sup>2.</sup> Thermal Resistance, Junction-to-Ambient depends on P.C.B. Copper area. See details in Figure 8.

**Thermal Resistance, Junction–to–Case** is not defined. SOIC 8 lead and TO-92 packages that do not have a heat sink like other packages may have. This is the reason that a Theta JC is never specified. A little heat transfer will occur through the package but since it is plastic, it is minimal. The majority of the heat that is transferred is through the leads where they connect to the circuit board.

**ELECTRICAL CHARACTERISTICS** (V<sub>I</sub> = 10 V, I<sub>O</sub> = 40 mA, C<sub>I</sub> = 0.33  $\mu$ F, C<sub>O</sub> = 0.1  $\mu$ F,  $-40^{\circ}$ C < T<sub>J</sub> < +125 $^{\circ}$ C (for MC78LXXAB, NCV78L05A),  $0^{\circ}$ C < T<sub>J</sub> < +125 $^{\circ}$ C (for MC78LXXAC), unless otherwise noted.)

		MC78L05AC, AB, NCV78L05A			
Characteristics	Symbol	Min	Тур	Max	Unit
Output Voltage ( $T_J = +25^{\circ}C$ )	V <sub>O</sub>	4.8	5.0	5.2	Vdc
Line Regulation $(T_J = +25^{\circ}C, I_O = 40 \text{ mA})$ $7.0 \text{ Vdc} \le V_I \le 20 \text{ Vdc}$ $8.0 \text{ Vdc} \le V_I \le 20 \text{ Vdc}$	Reg <sub>line</sub>	- -	55 45	150 100	mV
Load Regulation $(T_J = +25^{\circ}C, 1.0 \text{ mA} \le I_O \le 100 \text{ mA})$ $(T_J = +25^{\circ}C, 1.0 \text{ mA} \le I_O \le 40 \text{ mA})$	Reg <sub>load</sub>		11 5.0	60 30	mV
Output Voltage $ (7.0 \text{ Vdc} \leq \text{V}_{\text{I}} \leq 20 \text{ Vdc}, \ 1.0 \text{ mA} \leq \text{I}_{\text{O}} \leq 40 \text{ mA}) \\ (\text{V}_{\text{I}} = 10 \text{ V}, \ 1.0 \text{ mA} \leq \text{I}_{\text{O}} \leq 70 \text{ mA}) $	Vo	4.75 4.75		5.25 5.25	Vdc
Input Bias Current $(T_J = +25^{\circ}C)$ $(T_J = +125^{\circ}C)$	I <sub>IB</sub>	- -	3.8	6.0 5.5	mA
Input Bias Current Change (8.0 Vdc $\leq$ V <sub>I</sub> $\leq$ 20 Vdc) (1.0 mA $\leq$ I <sub>O</sub> $\leq$ 40 mA)	Δl <sub>IB</sub>	- -	- -	1.5 0.1	mA
Output Noise Voltage $(T_A = +25^{\circ}C, 10 \text{ Hz} \le f \le 100 \text{ kHz})$	V <sub>n</sub>	-	40	-	μV
Ripple Rejection ( $I_O = 40 \text{ mA}$ , f = 120 Hz, 8.0 Vdc $\leq$ V <sub>I</sub> $\leq$ 18 V, T <sub>J</sub> = +25°C)	RR	41	49		dB
Dropout Voltage $(T_J = +25^{\circ}C)$	$V_I - V_O$	-	1.7	-	Vdc

NOTE: NCV78L05A:  $T_{low} = -40^{\circ}C$ ,  $T_{high} = +125^{\circ}C$ . Guaranteed by design. NCV prefix is for automotive and other applications requiring site and change control.

**ELECTRICAL CHARACTERISTICS** (V<sub>I</sub> = 14 V, I<sub>O</sub> = 40 mA, C<sub>I</sub> = 0.33  $\mu$ F, C<sub>O</sub> = 0.1  $\mu$ F,  $-40^{\circ}$ C < T<sub>J</sub> < +125 $^{\circ}$ C (for MC78LXXAB), 0 $^{\circ}$ C < T<sub>J</sub> < +125 $^{\circ}$ C (for MC78LXXAC), unless otherwise noted.)

		MC78L08AC, AB			
Characteristics	Symbol	Min	Тур	Max	Unit
Output Voltage (T <sub>J</sub> = +25°C)	Vo	7.7	8.0	8.3	Vdc
Line Regulation $(T_J = +25^{\circ}C, I_O = 40 \text{ mA})$ $10.5 \text{ Vdc} \le V_J \le 23 \text{ Vdc}$	Reg <sub>line</sub>	-	20	175	mV
11 Vdc ≤ V <sub>I</sub> ≤ 23 Vdc		-	12	125	
Load Regulation $ (T_J = +25^{\circ}\text{C}, 1.0 \text{ mA} \le I_O \le 100 \text{ mA}) \\ (T_J = +25^{\circ}\text{C}, 1.0 \text{ mA} \le I_O \le 40 \text{ mA}) $	Reg <sub>load</sub>		15 8.0	80 40	mV
Output Voltage $(10.5 \text{ Vdc} \le \text{V}_{\text{I}} \le 23 \text{ Vdc}, 1.0 \text{ mA} \le \text{I}_{\text{O}} \le 40 \text{ mA})$ $(\text{V}_{\text{I}} = 14 \text{ V}, 1.0 \text{ mA} \le \text{I}_{\text{O}} \le 70 \text{ mA})$	Vo	7.6 7.6	_ _	8.4 8.4	Vdc
Input Bias Current $(T_J = +25^{\circ}C)$ $(T_J = +125^{\circ}C)$	I <sub>IB</sub>	_ _	3.0	6.0 5.5	mA
Input Bias Current Change (11 $Vdc \le V_l \le 23 Vdc$ ) (1.0 $mA \le I_O \le 40 mA$ )	$\Delta I_{ m IB}$		_ _	1.5 0.1	mA
Output Noise Voltage ( $T_A = +25^{\circ}C$ , 10 Hz $\leq f \leq$ 100 kHz)	V <sub>n</sub>		60		μV
Ripple Rejection ( $I_O = 40 \text{ mA}$ , $f = 120 \text{ Hz}$ , $12 \text{ V} \le \text{V}_I \le 23 \text{ V}$ , $T_J = +25^{\circ}\text{C}$ )	RR	37	57	-	dB
Dropout Voltage $(T_J = +25^{\circ}C)$	$V_I - V_O$	_	1.7	-	Vdc

**ELECTRICAL CHARACTERISTICS** (V<sub>I</sub> = 15 V, I<sub>O</sub> = 40 mA, C<sub>I</sub> = 0.33  $\mu$ F, C<sub>O</sub> = 0.1  $\mu$ F,  $-40^{\circ}$ C < T<sub>J</sub> < +125 $^{\circ}$ C (for MC78LXXAB), 0 $^{\circ}$ C < T<sub>J</sub> < +125 $^{\circ}$ C (for MC78LXXAC), unless otherwise noted.)

		М	C78L09AC,	AB	
Characteristics	Symbol	Min	Тур	Max	Unit
Output Voltage (T <sub>J</sub> = +25°C)	V <sub>O</sub>	8.6	9.0	9.4	Vdc
Line Regulation $ \begin{array}{l} (T_J = +25^\circ C,\ I_O = 40\ mA) \\ 11.5\ Vdc \leq V_I \leq 24\ Vdc \\ 12\ Vdc \leq V_I \leq 24\ Vdc \end{array} $	Reg <sub>line</sub>		20 12	175 125	mV
Load Regulation $(T_J = +25^{\circ}C, 1.0 \text{ mA} \le I_O \le 100 \text{ mA})$ $(T_J = +25^{\circ}C, 1.0 \text{ mA} \le I_O \le 40 \text{ mA})$	Reg <sub>load</sub>	_ _	15 8.0	90 40	mV
Output Voltage (11.5 Vdc $\leq$ V $_{I}$ $\leq$ 24 Vdc, 1.0 mA $\leq$ I $_{O}$ $\leq$ 40 mA) (V $_{I}$ = 15 V, 1.0 mA $\leq$ I $_{O}$ $\leq$ 70 mA)	Vo	8.5 8.5	- -	9.5 9.5	Vdc
Input Bias Current $(T_J = +25^{\circ}C)$ $(T_J = +125^{\circ}C)$	I <sub>IB</sub>	- -	3.0	6.0 5.5	mA
Input Bias Current Change (11 Vdc $\leq$ V <sub>I</sub> $\leq$ 23 Vdc) (1.0 mA $\leq$ I <sub>O</sub> $\leq$ 40 mA)	$\Delta l_{IB}$	_ _	_ _	1.5 0.1	mA
Output Noise Voltage $(T_A = +25^{\circ}C, 10 \text{ Hz} \le f \le 100 \text{ kHz})$	V <sub>n</sub>	-	60	-	μV
Ripple Rejection ( $I_O = 40$ mA, f = 120 Hz, 13 V $\leq$ V <sub>I</sub> $\leq$ 24 V, T <sub>J</sub> = +25°C)	RR	37	57	_	dB
Dropout Voltage $(T_J = +25^{\circ}C)$	$V_I - V_O$	_	1.7	_	Vdc

**ELECTRICAL CHARACTERISTICS** (V<sub>I</sub> = 19 V, I<sub>O</sub> = 40 mA, C<sub>I</sub> = 0.33  $\mu$ F, C<sub>O</sub> = 0.1  $\mu$ F,  $-40^{\circ}$ C < T<sub>J</sub> < +125°C (for MC78LXXAB), 0°C < T<sub>J</sub> < +125°C (for MC78LXXAC), unless otherwise noted.)

		MC78L12AC, AB			
Characteristics	Symbol	Min	Тур	Max	Unit
Output Voltage (T <sub>J</sub> = +25°C)	Vo	11.5	12	12.5	Vdc
Line Regulation $ \begin{array}{l} (T_J=+25^\circ C,\ I_O=40\ Ma)\\ 14.5\ Vdc \le V_I \le 27\ Vdc\\ 16\ Vdc \le V_I \le 27\ Vdc \end{array} $	Reg <sub>line</sub>		120 100	250 200	mV
Load Regulation $(T_J = +25^{\circ}C, 1.0 \text{ mA} \le I_O \le 100 \text{ mA})$ $(T_J = +25^{\circ}C, 1.0 \text{ mA} \le I_O \le 40 \text{ mA})$	Reg <sub>load</sub>	_ _	20 10	100 50	mV
Output Voltage $(14.5 \text{ Vdc} \le \text{V}_{\text{I}} \le 27 \text{ Vdc}, 1.0 \text{ mA} \le \text{I}_{\text{O}} \le 40 \text{ mA})$ $(\text{V}_{\text{I}} = 19 \text{ V}, 1.0 \text{ mA} \le \text{I}_{\text{O}} \le 70 \text{ mA})$	Vo	11.4 11.4	- -	12.6 12.6	Vdc
Input Bias Current $(T_J = +25^{\circ}C)$ $(T_J = +125^{\circ}C)$	I <sub>IB</sub>	_ _	4.2 _	6.5 6.0	mA
Input Bias Current Change (16 Vdc $\leq$ V $_{I}$ $\leq$ 27 Vdc) (1.0 mA $\leq$ I $_{O}$ $\leq$ 40 mA)	$\Delta l_{ m IB}$	_ _	_ _	1.5 0.1	mA
Output Noise Voltage $(T_A = +25^{\circ}C, 10 \text{ Hz} \le f \le 100 \text{ kHz})$	V <sub>n</sub>	_	80	-	μV
Ripple Rejection (I <sub>O</sub> = 40 mA, f = 120 Hz, 15 V $\leq$ V <sub>I</sub> $\leq$ 25 V, T <sub>J</sub> = +25°C)	RR	37	42	-	dB
Dropout Voltage (T <sub>J</sub> = +25°C)	V <sub>I</sub> – V <sub>O</sub>	-	1.7	-	Vdc

**ELECTRICAL CHARACTERISTICS** (V<sub>I</sub> = 23 V, I<sub>O</sub> = 40 mA, C<sub>I</sub> = 0.33  $\mu$ F, C<sub>O</sub> = 0.1  $\mu$ F,  $-40^{\circ}$ C < T<sub>J</sub> < +125 $^{\circ}$ C (for MC78LXXAB), 0 $^{\circ}$ C < T<sub>J</sub> < +125 $^{\circ}$ C (for MC78LXXAC), unless otherwise noted.)

	MC78L15AC, AB /			MC78L15AC, AB / NCV78L15A	
Characteristics	Symbol	Min	Тур	Max	Unit
Output Voltage (T <sub>J</sub> = +25°C)	V <sub>O</sub>	14.4	15	15.6	Vdc
Line Regulation $ \begin{array}{l} \text{Line Regulation} \\ (T_J = +25^\circ\text{C}, \ I_O = 40 \ \text{mA}) \\ 17.5 \ \text{Vdc} \leq V_I \leq 30 \ \text{Vdc} \\ 20 \ \text{Vdc} \leq V_I \leq 30 \ \text{Vdc} \end{array} $	Reg <sub>line</sub>		130 110	300 250	mV
Load Regulation $ (T_J = +25^{\circ}C, \ 1.0 \ \text{mA} \leq I_O \leq 100 \ \text{mA}) \\ (T_J = +25^{\circ}C, \ 1.0 \ \text{mA} \leq I_O \leq 40 \ \text{mA}) $	Reg <sub>load</sub>		25 12	150 75	mV
Output Voltage $(17.5 \text{ Vdc} \le V_l \le 30 \text{ Vdc}, 1.0 \text{ mA} \le I_O \le 40 \text{ mA})$ $(V_l = 23 \text{ V}, 1.0 \text{ mA} \le I_O \le 70 \text{ mA})$	Vo	14.25 14.25	- -	15.75 15.75	Vdc
Input Bias Current $(T_J = +25^{\circ}C)$ $(T_J = +125^{\circ}C)$	I <sub>IB</sub>	_ _	4.4 -	6.5 6.0	mA
Input Bias Current Change (20 Vdc $\leq$ V <sub>I</sub> $\leq$ 30 Vdc) (1.0 mA $\leq$ I <sub>O</sub> $\leq$ 40 mA)	$\Delta I_{ m IB}$		- -	1.5 0.1	mA
Output Noise Voltage $(T_A = +25^{\circ}C, 10 \text{ Hz} \le f \le 100 \text{ kHz})$	V <sub>n</sub>	-	90	-	μV
Ripple Rejection (I <sub>O</sub> = 40 mA, f = 120 Hz, 18.5 V $\leq$ V <sub>I</sub> $\leq$ 28.5 V, T <sub>J</sub> = +25°C)	RR	34	39	-	dB
Dropout Voltage (T <sub>J</sub> = +25°C)	V <sub>I</sub> – V <sub>O</sub>	-	1.7	_	Vdc


### $\textbf{ELECTRICAL CHARACTERISTICS} \ (V_I = 27 \ V, \ I_O = 40 \ mA, \ C_I = 0.33 \ \mu F, \ C_O = 0.1 \ \mu F, \ 0^{\circ}C < T_J < +125^{\circ}C, \ unless \ otherwise \ noted.)$

		MC78L18AC			
Characteristics	Symbol	Min	Тур	Max	Unit
Output Voltage ( $T_J = +25^{\circ}C$ )	Vo	17.3	18	18.7	Vdc
Line Regulation $(T_J = +25^{\circ}C, I_O = 40 \text{ mA})$ $21.4 \text{ Vdc} \le V_I \le 33 \text{ Vdc}$ $20.7 \text{ Vdc} \le V_I \le 33 \text{ Vdc}$	Reg <sub>line</sub>	_	45	325	mV
22 $Vdc \le V_1 \le 33 Vdc$ 21 $Vdc \le V_1 \le 33 Vdc$		-	35	275	
Load Regulation $(T_J = +25^{\circ}C, 1.0 \text{ mA} \le I_O \le 100 \text{ mA})$ $(T_J = +25^{\circ}C, 1.0 \text{ mA} \le I_O \le 40 \text{ mA})$	Reg <sub>load</sub>	- -	30 15	170 85	mV
Output Voltage $(21.4 \text{ Vdc} \le \text{V}_{\text{I}} \le 33 \text{ Vdc}, 1.0 \text{ mA} \le \text{I}_{\text{O}} \le 40 \text{ mA})$ $(20.7 \text{ Vdc} \le \text{V}_{\text{I}} \le 33 \text{ Vdc}, 1.0 \text{ mA} \le \text{I}_{\text{O}} \le 40 \text{ mA})$ $(\text{V}_{\text{I}} = 27 \text{ V}, 1.0 \text{ mA} \le \text{I}_{\text{O}} \le 70 \text{ mA})$	Vo	17.1	_	18.9	Vdc
$(V_1 = 27 \text{ V}, 1.0 \text{ mA} \le I_0 \le 70 \text{ mA})$		17.1	-	18.9	
Input Bias Current $(T_J = +25^{\circ}C)$ $(T_J = +125^{\circ}C)$	I <sub>IB</sub>	_ _	3.1	6.5 6.0	mA
Input Bias Current Change (22 Vdc ≤ V <sub>I</sub> ≤ 33 Vdc)	$\Delta I_{IB}$				mA
(21 Vdc $\leq$ V <sub>I</sub> $\leq$ 33 Vdc) (1.0 mA $\leq$ I <sub>O</sub> $\leq$ 40 mA)		_	_	1.5 0.1	
Output Noise Voltage $(T_A = +25^{\circ}C, 10 \text{ Hz} \le f \le 100 \text{ kHz})$	V <sub>n</sub>	-	150	_	μV
Ripple Rejection ( $I_O = 40$ mA, $f = 120$ Hz, $23$ V $\leq$ V $_I \leq 33$ V, $T_J = +25^{\circ}C$ )	RR	33	48		dB
Dropout Voltage $(T_J = +25^{\circ}C)$	V <sub>I</sub> – V <sub>O</sub>	-	1.7	_	Vdc

 $\textbf{ELECTRICAL CHARACTERISTICS} \ (V_I = 33 \ V, \ I_O = 40 \ \text{mA}, \ C_I = 0.33 \ \mu\text{F}, \ C_O = 0.1 \ \mu\text{F}, \ 0^{\circ}\text{C} < \text{T}_J < +125^{\circ}\text{C}, \ unless \ otherwise \ noted.)$ 

		MC78L24AC			
Characteristics	Symbol	Min	Тур	Max	Unit
Output Voltage (T <sub>J</sub> = +25°C)	Vo	23	24	25	Vdc
Line Regulation $ \begin{array}{l} (T_J=+25^\circ C,\ I_O=40\ mA)\\ 27.5\ Vdc \le V_I \le 38\ Vdc\\ 28\ Vdc \le V_I \le 80\ Vdc\\ 27\ Vdc \le V_I \le 38\ Vdc \end{array} $	Reg <sub>line</sub>	- - -	- 50 60	- 300 350	mV
Load Regulation $ \begin{array}{l} (T_J=+25^\circ C,\ 1.0\ mA\leq I_O\leq 100\ mA)\\ (T_J=+25^\circ C,\ 1.0\ mA\leq I_O\leq 40\ mA) \end{array} $	Reg <sub>load</sub>		40 20	200 100	mV
Output Voltage (28 Vdc $\leq$ V $_{I}$ $\leq$ 38 Vdc, 1.0 mA $\leq$ I $_{O}$ $\leq$ 40 mA) (27 Vdc $\leq$ V $_{I}$ $\leq$ 38 Vdc, 1.0 mA $\leq$ I $_{O}$ $\leq$ 40 mA) (28 Vdc $\leq$ V $_{I}$ $\equiv$ 33 Vdc, 1.0 mA $\leq$ I $_{O}$ $\leq$ 70 mA) (27 Vdc $\leq$ V $_{I}$ $\leq$ 33 Vdc, 1.0 mA $\leq$ I $_{O}$ $\leq$ 70 mA)	Vo	22.8 22.8	-	25.2 25.2	Vdc
Input Bias Current $(T_J = +25^{\circ}C)$ $(T_J = +125^{\circ}C)$	I <sub>IB</sub>	- -	3.1	6.5 6.0	mA
Input Bias Current Change (28 Vdc $\leq$ V $_{I}$ $\leq$ 38 Vdc) (1.0 mA $\leq$ I $_{O}$ $\leq$ 40 mA)	$\Delta l_{IB}$	- -		1.5 0.1	mA
Output Noise Voltage $(T_A = +25^{\circ}C, 10 \text{ Hz} \le f \le 100 \text{ kHz})$	V <sub>n</sub>	-	200	-	μV
Ripple Rejection (I <sub>O</sub> = 40 mA, f = 120 Hz, 29 V $\leq$ V <sub>I</sub> $\leq$ 35 V, T <sub>J</sub> = +25°C)	RR	31	45	-	dB
Dropout Voltage $(T_J = +25^{\circ}C)$	$V_I - V_O$	-	1.7	-	Vdc

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.



**Figure 3. Dropout Characteristics** 




Figure 4. Dropout Voltage versus Junction Temperature




Figure 5. Input Bias Current versus Ambient Temperature




Figure 6. Input Bias Current versus Input Voltage




Figure 7. Maximum Average Power Dissipation versus Ambient Temperature – TO-92 Type Package





Figure 8. SOIC-8 Thermal Resistance and Maximum Power Dissipation versus P.C.B. Copper Length

#### APPLICATIONS INFORMATION

### **Design Considerations**

The MC78L00A Series of fixed voltage regulators are designed with Thermal Overload Protection that shuts down the circuit when subjected to an excessive power overload condition. Internal Short Circuit Protection limits the maximum current the circuit will pass.

In many low current applications, compensation capacitors are not required. However, it is recommended that the regulator input be bypassed with a capacitor if the regulator is connected to the power supply filter with long wire lengths, or if the output load capacitance is large. The



The MC78L00 regulators can also be used as a current source when connected as above. In order to minimize dissipation the MC78L05C is chosen in this application. Resistor R determines the current as follows:

$$I_0 = \frac{5.0 \text{ V}}{\text{B}} + I_{\text{B}}$$

I<sub>IB</sub> = 3.8 mA over line and load changes

For example, a 100 mA current source would require R to be a 50  $\Omega$ , 1/2 W resistor and the output voltage compliance would be the input voltage less 7 V.

Figure 9. Current Regulator

input bypass capacitor should be selected to provide good high–frequency characteristics to insure stable operation under all load conditions. A  $0.33~\mu F$  or larger tantalum, mylar, or other capacitor having low internal impedance at high frequencies should be chosen. The bypass capacitor should be mounted with the shortest possible leads directly across the regulators input terminals. Good construction techniques should be used to minimize ground loops and lead resistance drops since the regulator has no external sense lead. Bypassing the output is also recommended.




Figure 10. ±15 V Tracking Voltage Regulator




Figure 11. Positive and Negative Regulator

### **ORDERING INFORMATION**

Device	Output Voltage	Operating Temperature Range	Package	Shipping <sup>†</sup>
MC78L05ABDG	5.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	SOIC-8 (Pb-Free)	98 Units / Rail
NCV78L05ABDG*	5.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	SOIC-8 (Pb-Free)	98 Units / Rail
MC78L05ABDR2G	5.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	SOIC-8 (Pb-Free)	2500 / Tape & Reel
NCV78L05ABDR2G*	5.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	SOIC-8 (Pb-Free)	2500 / Tape & Reel
MC78L05ABPG	5.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 Units / Bag
NCV78L05ABPG*	5.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 Units / Bag
MC78L05ABPRAG	5.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 / Tape & Reel
NCV78L05ABPRAG*	5.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 / Tape & Reel
MC78L05ABPREG	5.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 / Tape & Reel
NCV78L05ABPREG*	5.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 / Tape & Reel
MC78L05ABPRMG	5.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 / Ammo Pack
NCV78L05ABPRMG*	5.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 / Ammo Pack
NCV78L05ABPRPG*	5.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 / Ammo Pack
MC78L05ACDG	5.0 V	$T_J = 0^\circ$ to $+125^\circ$ C	SOIC-8 (Pb-Free)	98 Units / Rail
MC78L05ACDR2G	5.0 V	$T_J = 0^\circ$ to $+125^\circ$ C	SOIC-8 (Pb-Free)	2500 / Tape & Reel
MC78L05ACPG	5.0 V	$T_J = 0^\circ$ to $+125^\circ$ C	TO-92 (Pb-Free)	2000 Units / Bag
MC78L05ACPRAG	5.0 V	$T_J = 0^\circ$ to $+125^\circ$ C	TO-92 (Pb-Free)	2000 / Tape & Reel
MC78L05ACPREG	5.0 V	$T_J = 0^\circ$ to $+125^\circ$ C	TO-92 (Pb-Free)	2000 / Tape & Reel
MC78L05ACPRMG	5.0 V	$T_J = 0^\circ$ to $+125^\circ$ C	TO-92 (Pb-Free)	2000 / Ammo Pack
MC78L05ACPRPG	5.0 V	$T_J = 0^\circ$ to $+125^\circ$ C	TO-92 (Pb-Free)	2000 / Ammo Pack
MC78L05ACHT1G	5.0 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	SOT-89 (Pb-Free)	2500 / Tape & Reel
MC78L08ABDG	8.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	SOIC-8 (Pb-Free)	98 Units / Rail

<sup>\*</sup>NCV78L05A, NCV78L12A, NCV78L15A: T<sub>low</sub> = -40°C, T<sub>high</sub> = +125°C. Guaranteed by design. NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable. †For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

### **ORDERING INFORMATION** (continued)

Device	Output Voltage	Operating Temperature Range	Package	Shipping <sup>†</sup>
MC78L08ABDR2G	8.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	SOIC-8 (Pb-Free)	2500 / Tape & Reel
NCV78L08ABDR2G*	8.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	SOIC-8 (Pb-Free)	2500 / Tape & Reel
MC78L08ABPG	8.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 Units / Bag
MC78L08ABPRAG	8.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 / Tape & Reel
MC78L08ABPRPG	8.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 / Ammo Pack
MC78L08ACDG	8.0 V	$T_J = 0^\circ$ to $+125^\circ$ C	SOIC-8 (Pb-Free)	98 Units / Rail
MC78L08ACDR2G	8.0 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	SOIC-8 (Pb-Free)	2500 / Tape & Reel
MC78L08ACPG	8.0 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 Units / Bag
MC78L08ACPRAG	8.0 V	$T_J = 0^\circ$ to $+125^\circ$ C	TO-92 (Pb-Free)	2000 / Tape & Reel
MC78L08ACPREG	8.0 V	$T_J = 0^\circ$ to $+125^\circ$ C	TO-92 (Pb-Free)	2000 / Tape & Reel
MC78L08ACPRPG	8.0 V	$T_J = 0^\circ$ to $+125^\circ C$	TO-92 (Pb-Free)	2000 / Ammo Pack
MC78L09ABDG	9.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	SOIC-8 (Pb-Free)	98 Units / Rail
MC78L09ABDR2G	9.0 V	$T_J = -40^\circ$ to $+125^\circ$ C	SOIC-8 (Pb-Free)	2500 / Tape & Reel
MC78L09ABPRAG	9.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 / Tape & Reel
MC78L09ABPRPG	9.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 / Ammo Pack
MC78L09ACDG	9.0 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	SOIC-8 (Pb-Free)	98 Units / Rail
MC78L09ACDR2G	9.0 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	SOIC-8 (Pb-Free)	2500 / Tape & Reel
MC78L09ACPG	9.0 V	$T_J = 0^\circ$ to $+125^\circ$ C	TO-92 (Pb-Free)	2000 Units / Bag
MC78L12ABDG	12 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	SOIC-8 (Pb-Free)	98 Units / Rail
MC78L12ABDR2G	12 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	SOIC-8 (Pb-Free)	2500 / Tape & Reel
NCV78L12ABDG*	12 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	SOIC-8 (Pb-Free)	98 Units / Rail
NCV78L12ABDR2G*	12 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	SOIC-8 (Pb-Free)	2500 / Tape & Reel
MC78L12ABPG	12 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 Units / Bag

<sup>\*</sup>NCV78L05A, NCV78L12A, NCV78L15A: T<sub>low</sub> = -40°C, T<sub>high</sub> = +125°C. Guaranteed by design. NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable. †For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

### **ORDERING INFORMATION** (continued)

Device	Output Voltage	Operating Temperature Range	Package	Shipping <sup>†</sup>
MC78L12ABPRPG	12 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 / Ammo Pack
NCV78L12ABPG*	12 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 Units / Bag
MC78L12ACDG	12 V	$T_J = 0^\circ \text{ to } +125^\circ \text{C}$	SOIC-8 (Pb-Free)	98 Units / Rail
MC78L12ACDR2G	12 V	$T_J = 0^\circ \text{ to } +125^\circ \text{C}$	SOIC-8 (Pb-Free)	2500 / Tape & Reel
MC78L12ACPG	12 V	$T_J = 0^\circ \text{ to } +125^\circ \text{C}$	TO-92 (Pb-Free)	2000 Units / Bag
MC78L12ACPRAG	12 V	$T_J = 0^\circ \text{ to } +125^\circ \text{C}$	TO-92 (Pb-Free)	2000 / Tape & Reel
MC78L12ACPREG	12 V	$T_J = 0^\circ \text{ to } +125^\circ \text{C}$	TO-92 (Pb-Free)	2000 / Tape & Reel
MC78L12ACPRMG	12 V	$T_J = 0^\circ \text{ to } +125^\circ \text{C}$	TO-92 (Pb-Free)	2000 / Ammo Pack
MC78L12ACPRPG	12 V	$T_J = 0^\circ \text{ to } +125^\circ \text{C}$	TO-92 (Pb-Free)	2000 / Ammo Pack
MC78L15ABDG	15 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	SOIC-8 (Pb-Free)	98 Units / Rail
MC78L15ABDR2G	15 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	SOIC-8 (Pb-Free)	2500 / Tape & Reel
NCV78L15ABDR2G*	15 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	SOIC-8 (Pb-Free)	2500 / Tape & Reel
MC78L15ABPG	15 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 Units / Bag
MC78L15ABPRAG	15 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 / Tape & Reel
MC78L15ABPRPG	15 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 / Ammo Pack
MC78L15ACDG	15 V	$T_J = 0^\circ \text{ to } +125^\circ \text{C}$	SOIC-8 (Pb-Free)	98 Units / Rail
MC78L15ACDR2G	15 V	$T_J = 0^\circ \text{ to } +125^\circ \text{C}$	SOIC-8 (Pb-Free)	2500 / Tape & Reel
MC78L15ACPG	15 V	$T_J = 0^\circ \text{ to } +125^\circ \text{C}$	TO-92 (Pb-Free)	2000 Units / Bag
MC78L15ACPRAG	15 V	$T_J = 0^\circ \text{ to } +125^\circ \text{C}$	TO-92 (Pb-Free)	2000 / Tape & Reel
MC78L15ACPRPG	15 V	T <sub>J</sub> = 0° to +125°C	TO-92 (Pb-Free)	2000 / Ammo Pack
MC78L18ABPG	18 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 Units / Bag
MC78L18ACPG	18 V	T <sub>J</sub> = 0° to +125°C	TO-92 (Pb-Free)	2000 Units / Bag
MC78L18ACPRAG	18 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 / Tape & Reel

<sup>\*</sup>NCV78L05A, NCV78L12A, NCV78L15A:  $T_{low} = -40^{\circ}C$ ,  $T_{high} = +125^{\circ}C$ . Guaranteed by design. NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


### **ORDERING INFORMATION** (continued)

Device	Output Voltage	Operating Temperature Range	Package	Shipping <sup>†</sup>
MC78L18ACPRMG	18 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 / Ammo Pack
MC78L18ACPRPG	18 V	$T_J = 0^\circ$ to $+125^\circ$ C	TO-92 (Pb-Free)	2000 / Ammo Pack
MC78L24ABPG	24 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 Units / Bag
NCV78L24ABPRPG*	24 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 Units / Bag
MC78L24ACPG	24 V	$T_J = 0^\circ$ to $+125^\circ$ C	TO-92 (Pb-Free)	2000 Units / Bag
MC78L24ACPRAG	24 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 / Tape & Reel
MC78L24ACPRPG	24 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 / Ammo Pack

<sup>\*</sup>NCV78L05A, NCV78L12A, NCV78L15A:  $T_{low} = -40^{\circ}C$ ,  $T_{high} = +125^{\circ}C$ . Guaranteed by design. NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

### **MARKING DIAGRAMS**





xx = 05, 08, 09, 12, or 15

A = Assembly Location

L = Wafer Lot Y = Year

W = Work Week

B, C = Temperature Range

= Pb–Free Package

#### SOT-89 CASE 528AG




Y = Year

W = Work Week

XX = Specific Device Code

#### TO-92 P SUFFIX CASE 029



zz = 05, 08, 09, 12, 15, 18 or 24

A = Assembly Location

L = Wafer Lot

Y = Year

W = Work Week


= Pb–Free Package

(Note: Microdot may be in either location)

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

### **PACKAGE DIMENSIONS**

SOIC-8 NB CASE 751-07 **ISSUE AK** 

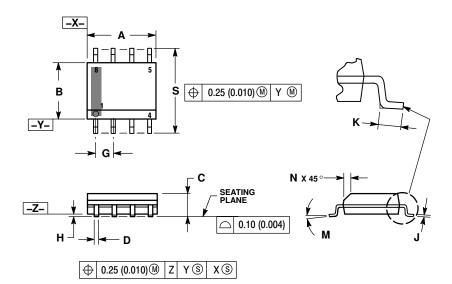


#### NOTES:

- NOTIES:
   DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
   CONTROLLING DIMENSION: MILLIMETER.
   DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
   MAXIMUM MOLD PROTRUSION 0.15 (0.006)
- MAXIMUM MOLD PROTRUSION 0.15 (0.006)
  PER SIDE.
  DIMENSION D DOES NOT INCLUDE DAMBAR
  PROTRUSION. ALLOWABLE DAMBAR
  PROTRUSION SHALL BE 0.127 (0.005) TOTAL
  IN EXCESS OF THE D DIMENSION AT
  MAXIMUM MATERIAL CONDITION.
  751-01 THRU 751-06 ARE OBSOLETE. NEW
  STANDARD IS 751-07.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
Α	4.80	5.00	0.189	0.197
В	3.80	4.00	0.150	0.157
С	1.35	1.75	0.053	0.069
D	0.33	0.51	0.013	0.020
G	1.27 BSC		0.050 BSC	
Н	0.10	0.25	0.004	0.010
J	0.19	0.25	0.007	0.010
K	0.40	1.27	0.016	0.050
М	0 °	8 °	0 °	8 °
N	0.25	0.50	0.010	0.020
S	5.80	6.20	0.228	0.244

#### **SOLDERING FOOTPRINT\***




SCALE 6:1

<sup>\*</sup>For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

### **PACKAGE DIMENSIONS**

TO-92 (TO-226) CASE 029-11 **ISSUE AM** 




STRAIGHT LEAD **BULK PACK** 



- NOTES:
  1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
  4. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
Α	0.175	0.205	4.45	5.20
В	0.170	0.210	4.32	5.33
С	0.125	0.165	3.18	4.19
D	0.016	0.021	0.407	0.533
G	0.045	0.055	1.15	1.39
Н	0.095	0.105	2.42	2.66
J	0.015	0.020	0.39	0.50
K	0.500		12.70	
L	0.250		6.35	
N	0.080	0.105	2.04	2.66
Р		0.100		2.54
R	0.115		2.93	
٧	0.135		3.43	



**BENT LEAD** TAPE & REEL AMMO PACK



#### NOTES:


- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994. CONTROLLING DIMENSION:


- CONTROLLING DIMENSION:
  MILLIMETERS.
  CONTOUR OF PACKAGE BEYOND
  DIMENSION R IS UNCONTROLLED.
  LEAD DIMENSION IS UNCONTROLLED IN
  P AND BEYOND DIMENSION K MINIMUM.


	MILLIMETERS		
DIM	MIN	MAX	
Α	4.45	5.20	
В	4.32	5.33	
С	3.18	4.19	
D	0.40	0.54	
G	2.40	2.80	
J	0.39	0.50	
K	12.70		
N	2.04	2.66	
P	1.50	4.00	
R	2.93		
V	3.43		

#### PACKAGE DIMENSIONS

### **SOT-89, 3 LEAD** CASE 528AG **ISSUE O**








#### NOTES:

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994
- CONTROLLING DIMENSION: MILLIMETERS.
- LEAD THICKNESS INCLUDES LEAD FINISH.
  DIMENSIONS D AND E DO NOT INCLUDE MOLD
  FLASH, PROTRUSIONS, OR GATE BURRS.
  DIMENSIONS L, L2, D2, AND H ARE MEASURED
- AT DATUM PLANE C.
  CENTER LEAD CONTOUR MAY VARY WITHIN THE
- REGION DEFINED BY DIMENSION E.
  DIMENSION D2 IS DEFINED AT ITS WIDEST POINT.

	MILLIMETERS		
DIM	MIN	MAX	
Α	1.40	1.60	
b	0.38	0.47	
b1	0.46	0.55	
С	0.40	0.44	
D	4.40	4.60	
D2	1.60	1.90	
E	2.40	2.60	
е	1.50 BSC		
Н	4.05	4.25	
L	0.89	1.20	

#### RECOMMENDED **MOUNTING FOOTPRINT\***



**DIMENSIONS: MILLIMETERS** 

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and 📖 are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor and IIII are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="https://www.nsemi.com/site/pdf/Patent-Marking.pdf">www.nsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications union provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application. Buyer shall indemnify and h expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support:

Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your loca Sales Representative