

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







## MDS-030AAC Series / MDS-030AAC



# **030AAC**

#### **Highlights & Features**

- MDS-030AAC05, 12, 15, 24 Meet Efficiency Level VI
- MDS-030AAC07 Meet Efficiency Level V
- Safety Approvals to IEC 60601-1 3.1rd ed. & IEC 60950-1
- Compliant with IEC 60601-1-2 4th Ed. Requirements
- Meets Limited Power Source (LPS) requirements
- Low touch current. Suitable for type BF applications
- Detachable AC plug with multiple country options
- IP22 ingress protection rating
- 2 × MOPP isolation
- 500K hours MTBF
- 3 years warranty

#### **Safety Standards**







CB Certified for worldwide use

Model Number:MDS-030AAC□Unit Weight:150 grams

**Dimensions (W × L × H):** 53.5 × 88.0 × 27.5 mm 2.11 × 3.46 × 1.08 inch

### **General Description**

The MDS series of external power supply comes with universal AC input at 85Vac to 264Vac. Other features include low touch current, risk management report available and the electric shock protection comply with 2 × MOPP. The MDS series is certified for EMC standards according to EN 55011 for industrial, scientific and medical (ISM) radio-frequency equipment and EN 55022 for Information Technology Equipment (ITE) radio-frequency equipment. In addition, only recognized Japanese capacitors are used.

The MDS series come with both medical and ITE safety approvals including UL/cUL and IEC-60950-1 CB certification as a Limited Power Source (LPS), and CCC approval. Designs are fully compliant with RoHS Directive 2011/65/EU for environmental protection.

#### **Model Information**

### Medical AC-DC Adapter

Model Number	Input Voltage Range	Efficiency Level	Rated Output Voltage	Rated Output Current
MDS-030AAC05	85-264Vac	Level VI	5Vdc	3A
MDS-030AAC07		Level V	7Vdc	3A
MDS-030AAC12		Level VI	12Vdc	2A
MDS-030AAC15		Level VI	15Vdc	2A
MDS-030AAC24		Level VI	24Vdc	1.25A

### **Model Numbering**

MDS -	030	AAC		AA
Delta Medical Power Supply	Max wattage in the product series (may be lower at some voltage)	Family Code	Output Voltage (Single Output)  - 05 for 5V - 15 for 15V  - 07 for 7V - 24 for 24V  - 12 for 12V	Revision Code <sup>1), 2)</sup>

<sup>1) 1</sup>st digit: DC plug type and output cable length. A for  $2.1 \times 5.5 \times 10$  mm DC plug, and 1200 mm cable length.

<sup>2) 2</sup>nd digit: Country duck-head type (A\_ China, B\_ United States, C\_ European, D\_ United Kingdom, E\_ Australia, G\_ Korea, H\_ India, J\_ Argentina, K\_ Brazil, M\_ South Africa)



# MDS-030AAC Series / MDS-030AAC

### **Specifications**

Model Number		MDS-030AAC05	MDS-030AAC07	MDS-030AAC12	MDS-030AAC15	MDS-030AAC24	
Input Ratings / Characte	ristics						
Nominal Input Voltage		100-240Vac					
Input Voltage Range		85-264Vac					
Nominal Input Frequency		50-60Hz					
Input Frequency Range		47-63Hz					
Input Current (max)	115Vac	0.5A	0.6A	0.8A	0.8A	0.8A	
	230Vac	0.3A	0.4A	0.6A	0.6A	0.6A	
Average Efficiency (min)	115Vac		81.4%	86.21%	87.0%	87.0%	
	230Vac	81.4%					
Standby Power (max)	115Vac	0.4147	0.1W	0.1W	0.1W	0.1W	
	230Vac	0.1W					
Inrush Current (typ.)		60A @ 115Vac and 100A @ 230Vac					
Touch Current (max)		0.1mA @ 264Vac NC <sup>1)</sup> , 0.3mA @ 264Vac SFC <sup>2)</sup>					
Output-PE (protective earth) leakage current for Type BF application (max)		0.1mA @ 264Vac N	NC <sup>1)</sup> , 0.5mA @ 264\	Vac SFC <sup>2)</sup>			


<sup>1)</sup> NC: Normal condition

<sup>2)</sup> SFC: Single fault condition

Model Number	MDS-030AAC05	MDS-030AAC07	MDS-030AAC12	MDS-030AAC15	MDS-030AAC24	
Output Ratings / Characteristics						
Nominal Output Voltage	5Vdc	7Vdc	12Vdc	15Vdc	24Vdc	
Output Total Regulation			±6%			
Output Current	3A	3A	2A	2A	1.25A	
Output Power	15W	21W	24W	30W	30W	
Line Regulation	±1%					
Load Regulation	±5%					
Ripple & Noise (max)	100mVpk-pk @ Rated load	100mVpk-pk @ Rated load	150mVpk-pk @ Rated load	200mVpk-pk @ Rated load	200mVpk-pk @ Rated load	
Start-up Time (max)	3000ms @ 115Va	С				
Hold-up Time (min)	10ms @ 115Vac	10ms @ 115Vac				
Dynamic Response (Overshoot & Undershoot O/P Voltage)	±10% @ 50-100% load					
Capacitive load (max)	4700uF					

<sup>\*</sup>Periodic and Random Deviation.

### Ripple & Noise measurement circuit with 20MHz BW





# MDS-030AAC Series / MDS-030AAC

Mode	el Number	MDS-030AAC05	MDS-030AAC07	MDS-030AAC12	MDS-030AAC15	MDS-030AAC24	
Mechanical							
Case Chassis		PC					
Case Cover		PC					
Dimensions (W × L × H)		53.5 × 88.0 × 27.5 mm (2.11 × 3.46 × 1.08 in)					
Unit Weight		150 grams (5.3 ounces)					
Indicator		NA					
Cooling System		NA					
Terminal Input		Detachable type AC plug					
Output		Barrel type. Dimensions 2.1 × 5.5 × 10 mm (see page 5)					

### **Environment**

Surrounding Air	Operating	0°C to +40°C			
Temperature	Storage	-40°C to +85°C			
Operating Humidity		- 95% RH (Non-Condensing)			
Operating Altitude		5,000 meters (16400 feet)			
Shock Test (Non-Operating)		50G, 11ms, 3 shocks for each direction			
Vibration (Operating)		5-500Hz, 2.09Grms, 20 minute for each three axis			

### **Protections**

Overvoltage (max)	150%, Latch Mode
Overload / Overcurrent (max)	250% of rated load current, Hiccup Mode,
	(Non-Latching, Auto-Recovery)
Over Temperature	Hiccup Mode,
	(Non-Latching, Auto-Recovery)
Short Circuit	Hiccup Mode,
	(Non-Latching, Auto-Recovery)
Degree of Protection	IP22
Protection Against Shock	Class II

### Reliability Data

MTBE (min)	500K Hours based on Telecordia SR-332 (at 100Vac. Max. load and 25°C Ambient)
)	obstribute based on tolografia of tool (at 100 tas, max. load and 20 of ambient)



# MDS-030AAC Series / MDS-030AAC

Mod	lel Number	MDS-030AAC05	MDS-030AAC07	MDS-030AAC12	MDS-030AAC15	MDS-030AAC24	
Safety Standards / Directives							
Medical Safety		IEC60601-1 Edition 3.1 (2012), EN60601-1 (2006) + A11 + A1 + A12, CAN/CSA-C22.2 NO. 60601-1:14, ANSI/AAMI ES60601-1:2005/(R)2012 UL60601-1 (File No. E356265)					
ITE Safety		IEC60950-1 (Ed.2,2005), GB4943.1-2011, GB9254-2008, GB17625.1-2003 UL60950-1 (File No. E131881), LPS (Limited Power Source)					
CE		MDD Directive 93/42/EEC					
Material and Parts		RoHS Directive 2011/65/EU Compliant					
Galvanic Isolation	Input to Output						

### EMC (Compliant with IEC 60601-1-2 4th Ed. Requirements)

EMC / Emissions		EN55011/EN55022,FCC Title 47:Class B
Harmonic Current Emissions	IEC61000-3-2	
Immunity to		
Voltage Flicker	IEC61000-3-3	
Electrostatic Discharge	IEC61000-4-2	Level 4 Criteria A <sup>1)</sup> Air Discharge: 15kV Contact Discharge: 8kV
Radiated Field	IEC61000-4-3	Criteria A <sup>1)</sup> 80MHz-2700MHz, 10V/m AM modulation 385MHz-5785MHz, 28V/m Pulse mode and other modulation
Electrical Fast Transient / Burst	IEC61000-4-4	Level 3 Criteria A <sup>1)</sup> : 2kV
Surge	IEC61000-4-5	Level 3 Criteria A <sup>1)</sup> Differential Mode <sup>3)</sup> : 1kV
Conducted	IEC61000-4-6	Level 2 Criteria A <sup>1)</sup> 150kHz-80MHz, 3Vrms, 6Vrms at ISM bands and Amateur radio bands
Power Frequency Magnetic Fields	IEC61000-4-8	Criteria A <sup>1)</sup> Magnetic field strength 30A/m
Voltage Dips	IEC61000-4-11	Criteria A <sup>1)</sup> 0% U <sub>T</sub> , 0.5 cycle (10ms) , 0°/45°/90°/135°/180°/225°/270°/315°/360°
		Criteria B <sup>2)</sup> 0% U <sub>T</sub> , 1 cycle (20ms), 0°
		Criteria B <sup>2)</sup> 70% U <sub>T</sub> , 25 cycle (500ms), 0°
		Criteria B <sup>2)</sup> 0% U <sub>T</sub> , 250 cycle (5000ms), 0°


<sup>1)</sup> Criteria A: Normal performance within the specification limits

### **Block Diagram**




<sup>2)</sup> Criteria B: Output out of regulation, or shuts down during test. Automatically restore to normal operation after test. 3) Symmetrical: Differential mode (Line to line)

## MDS-030AAC Series / MDS-030AAC

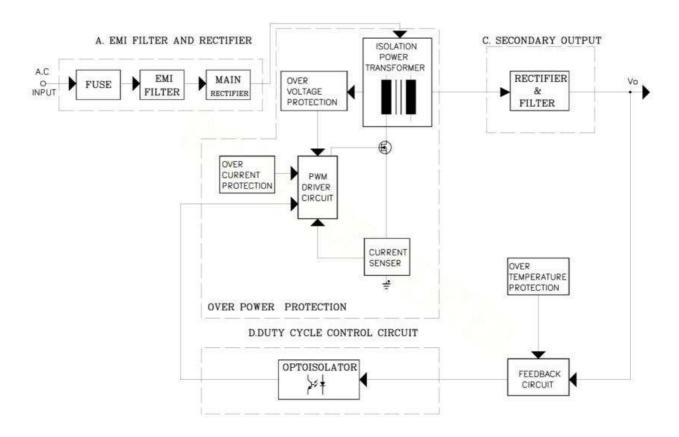

#### **Dimensions**

W × H × H: 53.5 × 88.0 × 27.5 mm

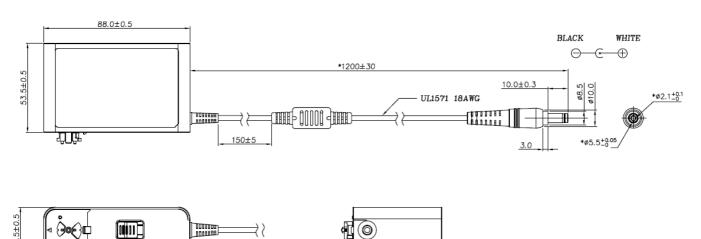







# MDS-030AAC Series / MDS-030AAC

### **Duck Head Type:**

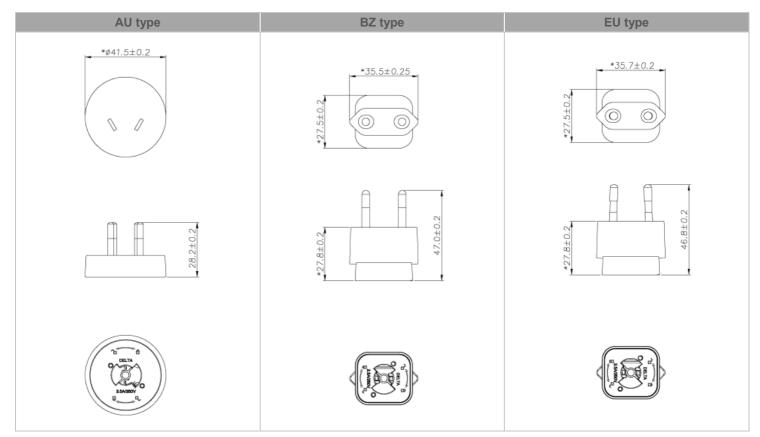

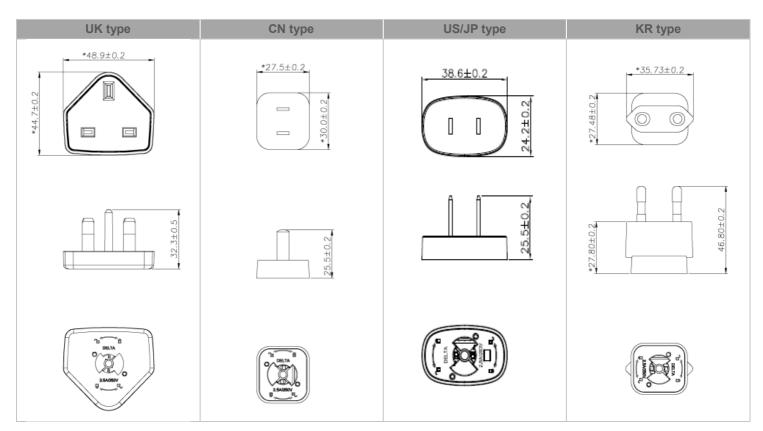



## MDS-030AAC Series / MDS-030AAC□

#### **Functions**

#### Start-up Time

The time required for the output voltage (Vo) to reach 90% of its set value, after the input AC voltage is applied.


#### Rise Time

The time required for the output voltage (Vo) to change from 10% to 90% of its steady state value.

#### Hold-up Time


Hold up time is the time when the AC input collapses and output voltage retains regulation for a certain period of time. The time required for the output to reach 95% of its set value, after the input voltage is removed.

#### ■ Graph illustrating the Start-up Time, Rise Time, and Hold-up Time

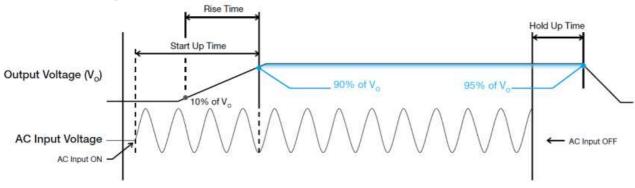


#### **Inrush Current**

Inrush current is the input current that occurs when the input voltage is first applied. For AC input voltages, the maximum peak value of inrush current will occur during the first half cycle of the applied AC voltage. This peak value decreases exponentially during subsequent cycles of AC voltage.



#### Dynamic Response

The power supply output voltage will remain within  $\pm 3\%$  of its steady state value, when subjected to a dynamic load change from 50 to 100% of its rated current.

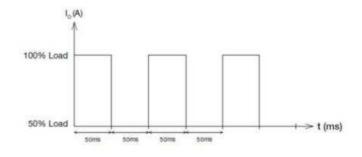




## MDS-030AAC Series / MDS-030AAC□

#### Overload & Over current Protections

The power supply's Overload (OLP) and Over current (OCP) Protections will be activated when output current is between 110% and 250% of  $I_{\rm O}$  (Max load). Upon such an occurrence,  $V_{\rm O}$  will start to drop. Once the power supply has reached its maximum power limit, the protection will be activated and the power supply will go into "Hiccup mode" (Auto-Recovery). The power supply will recover once the fault condition causing the OLP and OCP is removed and  $I_{\rm O}$  is back within the specified limit.

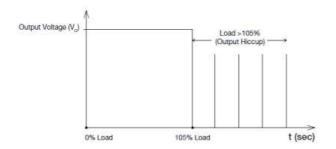

Additionally, if the  $I_{\rm O}$  is <250% but >110% for a prolong period of time (depending on the load), the Over Temperature Protection (OTP) will be activated due to high temperature on critical components. The power supply will then go into hiccup mode until the fault is removed; and, the input voltage is removed, then reapplied.

#### Short Circuit Protection (Auto-Recovery)

The power supply's output OLP/OCP function also provides protection against short circuits. When a short circuit is applied, the output current will operate in "Hiccup mode", as shown in the illustration in the OLP/OCP section on this page. The power supply will return to normal operation after the short circuit is removed.

#### Overvoltage Protection

The power supply's overvoltage circuit will be activated when its internal feedback circuit fails. The output voltage shall not exceed its specifications defined on Page 3 under "Protections". Power supply will latch off, and require removal/re-application of input AC voltage in order to restart.

#### **Over Temperature Protection**

As mentioned above, the power supply also has Over Temperature Protection (OTP). This is activated when the overload condition persists for an extended duration and the output current is below the overload trigger point but >100% load. In the event of a higher operating condition at 100% load, the power supply will run into OTP when the surrounding air temperature is higher than the operating temperature. When activated, the output voltage will go into hiccup mode until the input voltage is removed; then, reapplied, and the surrounding air temperature drops to its normal operating temperature.



## MDS-030AAC Series / MDS-030AAC□

#### **Certificate**



All Delta Medical Power products conform to the European directive 2011/65/EU. RoHS is the abbreviation for "Restriction of the use of certain hazardous substances."



Typically, the input current waveform is not sinusoidal due to the periodical peak charging of the input capacitor. In industrial environment, complying with EN 61000-3-2 is only necessary under special conditions. Complying to this standard can have some technical drawbacks, such as lower efficiency as well as some commercial aspects such as higher purchasing costs. Frequently, the user does not profit from fulfilling this standard, therefore, it is important to know whether it is mandatory to meet this standard for a specific application.



In addition to a UL Total Certification Program (TCP) approved client laboratory for IEC60950 and IEC60065. Delta also has participated UL Client Test Data Program (CDTP) for IEC 60601.



Meet Level V Efficiency Requirement for MDS-030AAC07



Meet Level VI Efficiency Requirement for MDS-030AAC05, 12, 15, 24



Meets Limited Power Source (LPS) requirement

