

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Rev. 4, 07/2016

#### **NXP Semiconductors**

Data Sheet: Technical Data

### MKE06P80M48SF0

# **KE06 Sub-Family Data Sheet**

Supports the following:

MKE06Z64VLD4(R),

MKE06Z128VLD4(R),

MKE06Z64VQH4(R),

MKE06Z128VQH4(R),

MKE06Z64VLH4(R),

MKE06Z128VLH4(R),

MKE06Z64VLK4(R), and

MKE06Z128VLK4(R)

#### **Key features**

- Operating characteristics
  - Voltage range: 2.7 to 5.5 V
  - Flash write voltage range: 2.7 to 5.5 V
  - Temperature range (ambient): -40 to 105°C
- · Performance
  - Up to 48 MHz ARM® Cortex-M0+ core
  - Single cycle 32-bit x 32-bit multiplier
  - Single cycle I/O access port
- Memories and memory interfaces
  - Up to 128 KB flash
  - Up to 16 KB RAM
- · Clocks
  - Oscillator (OSC) supports 32.768 kHz crystal or 4 MHz to 24 MHz crystal or ceramic resonator; choice of low power or high gain oscillators
  - Internal clock source (ICS) internal FLL with internal or external reference, 37.5 kHz pre-trimmed internal reference for 48 MHz system clock
  - Internal 1 kHz low-power oscillator (LPO)
- System peripherals
  - Power management module (PMC) with three power modes: Run, Wait, Stop
  - Low-voltage detection (LVD) with reset or interrupt, selectable trip points
  - Watchdog with independent clock source (WDOG)
  - Programmable cyclic redundancy check module (CRC)
  - Serial wire debug interface (SWD)
  - Aliased SRAM bitband region (BIT-BAND)
  - Bit manipulation engine (BME)

- · Security and integrity modules
  - 80-bit unique identification (ID) number per chip
- Human-machine interface
  - Up to 71 general-purpose input/output (GPIO)
  - Two 32-bit keyboard interrupt modules (KBI)
  - External interrupt (IRQ)
- · Analog modules
  - One up to 16-channel 12-bit SAR ADC, operation in Stop mode, optional hardware trigger (ADC)
  - Two analog comparators containing a 6-bit DAC and programmable reference input (ACMP)
- Timers
  - One 6-channel FlexTimer/PWM (FTM)
  - Two 2-channel FlexTimer/PWM (FTM)
  - One 2-channel periodic interrupt timer (PIT)
  - One pulse width timer (PWT)
  - One real-time clock (RTC)
- · Communication interfaces
  - Two SPI modules (SPI)
  - Up to three UART modules (UART)
  - Two I2C modules (I2C)
  - One MSCAN module (MSCAN)
- Package options
  - 80-pin LQFP
  - 64-pin QFP/LQFP
  - 44-pin LQFP



NXP reserves the right to change the production detail specifications as may be required to permit improvements in the design of its products.

# **Table of Contents**

1	Ord	ering par	ts4
	1.1	Determ	ining valid orderable parts
2	Part	identific	eation4
	2.1	Descrip	otion4
	2.2	Format	4
	2.3	Fields	4
	2.4	Examp	le5
3	Para	meter cl	assification5
4	Rati	ngs	6
	4.1	Therma	al handling ratings6
	4.2	Moistu	re handling ratings6
	4.3	ESD ha	andling ratings6
	4.4	Voltage	e and current operating ratings
5	Gen	eral	7
	5.1	Nonsw	itching electrical specifications
		5.1.1	DC characteristics
		5.1.2	Supply current characteristics
		5.1.3	EMC performance
	5.2	Switchi	ing specifications
		5.2.1	Control timing
		5.2.2	FTM module timing

	5.5	HICHHI	a specifications	10
		5.3.1	Thermal operating requirements	18
		5.3.2	Thermal characteristics	19
6	Peri	pheral o <sub>l</sub>	perating requirements and behaviors	20
	6.1	Core m	odules	20
		6.1.1	SWD electricals	20
	6.2	Externa	al oscillator (OSC) and ICS characteristics	21
	6.3	NVM s	pecifications	23
	6.4	Analog		24
		6.4.1	ADC characteristics	24
		6.4.2	Analog comparator (ACMP) electricals	27
	6.5	Commu	unication interfaces	27
		6.5.1	SPI switching specifications	27
		6.5.2	MSCAN	30
7	Dim	ensions.		31
	7.1	Obtaini	ng package dimensions	31
8	Pinc	out		31
	8.1	Signal 1	multiplexing and pin assignments	31
	8.2	Device	pin assignment	34
9	Rev	ision his	tory	37

### 1 Ordering parts

### 1.1 Determining valid orderable parts

Valid orderable part numbers are provided on the web. To determine the orderable part numbers for this device, go to **nxp.com** and perform a part number search for the following device numbers: KE06Z.

### 2 Part identification

### 2.1 Description

Part numbers for the chip have fields that identify the specific part. You can use the values of these fields to determine the specific part you have received.

### 2.2 Format

Part numbers for this device have the following format:

Q KE## A FFF R T PP CC N

### 2.3 Fields

This table lists the possible values for each field in the part number (not all combinations are valid):

Field	Description	Values				
Q	Qualification status	<ul> <li>M = Fully qualified, general market flow</li> <li>P = Prequalification</li> </ul>				
KE##	Kinetis family	• KE06				
Α	Key attribute	• Z = M0+ core				
FFF	Program flash memory size	• 128 = 128 KB				
R	Silicon revision	<ul><li>(Blank) = Main</li><li>A = Revision after main</li></ul>				
Т	Temperature range (°C)	• V = -40 to 105				
PP	Package identifier	• LD = 44 LQFP (10 mm x 10 mm)				

Table continues on the next page...

Field	Description	Values
		<ul> <li>QH = 64 QFP (14 mm x 14 mm)</li> <li>LH = 64 LQFP (10 mm x 10 mm)</li> <li>LK = 80 LQFP (14 mm x 14 mm)</li> </ul>
CC	Maximum CPU frequency (MHz)	• 4 = 48 MHz
N	Packaging type	R = Tape and reel (Blank) = Trays

### 2.4 Example

This is an example part number:

MKE06Z128VLK4

### 3 Parameter classification

The electrical parameters shown in this supplement are guaranteed by various methods. To give the customer a better understanding, the following classification is used and the parameters are tagged accordingly in the tables where appropriate:

Table 1. Parameter classifications

Р	Those parameters are guaranteed during production testing on each individual device.
С	Those parameters are achieved by the design characterization by measuring a statistically relevant sample size across process variations.
Т	Those parameters are achieved by design characterization on a small sample size from typical devices under typical conditions unless otherwise noted. All values shown in the typical column are within this category.
D	Those parameters are derived mainly from simulations.

#### NOTE

The classification is shown in the column labeled "C" in the parameter tables where appropriate.

KE06 Sub-Family Data Sheet, Rev. 4, 07/2016

### 4 Ratings

### 4.1 Thermal handling ratings

Symbol	Description	Min.	Max.	Unit	Notes
T <sub>STG</sub>	Storage temperature	<b>-</b> 55	150	°C	1
T <sub>SDR</sub>	Solder temperature, lead-free	_	260	°C	2

- 1. Determined according to JEDEC Standard JESD22-A103, High Temperature Storage Life.
- 2. Determined according to IPC/JEDEC Standard J-STD-020, Moisture/Reflow Sensitivity Classification for Nonhermetic Solid State Surface Mount Devices.

### 4.2 Moisture handling ratings

Symbol	Description	Min.	Max.	Unit	Notes
MSL	Moisture sensitivity level	1	3	_	1

Determined according to IPC/JEDEC Standard J-STD-020, Moisture/Reflow Sensitivity Classification for Nonhermetic Solid State Surface Mount Devices.

### 4.3 ESD handling ratings

Symbol	Description	Min.	Max.	Unit	Notes
V <sub>HBM</sub>	Electrostatic discharge voltage, human body model	-6000	+6000	V	1
V <sub>CDM</sub>	Electrostatic discharge voltage, charged-device model	-500	+500	V	2
I <sub>LAT</sub>	Latch-up current at ambient temperature of 125°C	-100	+100	mA	3

- Determined according to JEDEC Standard JESD22-A114, Electrostatic Discharge (ESD) Sensitivity Testing Human Body Model (HBM).
- 2. Determined according to JEDEC Standard JESD22-C101, Field-Induced Charged-Device Model Test Method for Electrostatic-Discharge-Withstand Thresholds of Microelectronic Components.
- 3. Determined according to JEDEC Standard JESD78D, IC Latch-up Test.
  - Test was performed at 125 °C case temperature (Class II).
  - I/O pins pass ±100 mA I-test with I<sub>DD</sub> current limit at 400 mA.
  - I/O pins pass +50/-100 mA I-test with I<sub>DD</sub> current limit at 1000 mA.
  - Supply groups pass 1.5 V<sub>ccmax</sub>.
  - RESET pin was only tested with negative I-test due to product conditioning requirement.

### 4.4 Voltage and current operating ratings

Absolute maximum ratings are stress ratings only, and functional operation at the maxima is not guaranteed. Stress beyond the limits specified in the following table may affect device reliability or cause permanent damage to the device. For functional operating conditions, refer to the remaining tables in this document.

This device contains circuitry protecting against damage due to high static voltage or electrical fields; however, it is advised that normal precautions be taken to avoid application of any voltages higher than maximum-rated voltages to this high-impedance circuit. Reliability of operation is enhanced if unused inputs are tied to an appropriate logic voltage level (for instance, either  $V_{SS}$  or  $V_{DD}$ ) or the programmable pullup resistor associated with the pin is enabled.

**Symbol Description** Min. Unit Max. ٧  $V_{DD}$ Digital supply voltage 6.0 -0.3120  $I_{DD}$ Maximum current into V<sub>DD</sub> mΑ  $V_{DD} + 0.3^{1}$ ٧  $V_{IN}$ Input voltage except true open drain pins -0.3-0.3Input voltage of true open drain pins -25 25  $I_D$ Instantaneous maximum current single pin limit (applies to all mΑ port pins)  $V_{DDA}$ Analog supply voltage  $V_{DD} - 0.3$  $V_{DD} + 0.3$ V

Table 2. Voltage and current operating ratings

### 5 General

### 5.1 Nonswitching electrical specifications

### 5.1.1 DC characteristics

This section includes information about power supply requirements and I/O pin characteristics.

Table 3. DC characteristics

	Symbol	С	Descriptions	Min	Typical <sup>1</sup>	Max	Unit	
Γ	_	_	Operating voltage	_	2.7	_	5.5	V

Table continues on the next page...

KE06 Sub-Family Data Sheet, Rev. 4, 07/2016

<sup>1.</sup> Maximum rating of V<sub>DD</sub> also applies to V<sub>IN</sub>.

### Nonswitching electrical specifications

Table 3. DC characteristics (continued)

Symbol	С		Descriptions	Min	Typical <sup>1</sup>	Max	Unit	
V <sub>OH</sub>	Р	Output	All I/O pins, except PTA2	5 V, I <sub>load</sub> = -5 mA	V <sub>DD</sub> – 0.8	_	_	٧
	С	high voltage	and PTA3, standard- drive strength	3 V, $I_{load} = -2.5 \text{ mA}$	V <sub>DD</sub> – 0.8	_	_	V
	Р		High current drive pins,	5 V, $I_{load} = -20 \text{ mA}$	$V_{DD}-0.8$			V
	С		high-drive strength <sup>2</sup>	3 V, $I_{load} = -10 \text{ mA}$	$V_{DD} - 0.8$		_	V
I <sub>OHT</sub>	D	Output	Max total I <sub>OH</sub> for all ports	5 V	_	_	-100	mA
		high current		3 V	_	_	-60	
V <sub>OL</sub>	Р	Output	All I/O pins, standard-	5 V, $I_{load} = 5 \text{ mA}$		_	0.8	V
	С	low voltage	drive strength	3 V, $I_{load} = 2.5 \text{ mA}$		_	8.0	V
	Р		High current drive pins,	5 V, I <sub>load</sub> =20 mA	_	_	8.0	V
	С		high-drive strength <sup>2</sup>	3 V, I <sub>load</sub> = 10 mA	_	_	8.0	V
I <sub>OLT</sub>	D	Output	Max total I <sub>OL</sub> for all ports	5 V	_	_	100	mA
		low current		3 V	_	_	60	
V <sub>IH</sub>	Р	Input	All digital inputs	4.5≤V <sub>DD</sub> <5.5 V	$0.65 \times V_{DD}$	_	_	٧
		high voltage		2.7≤V <sub>DD</sub> <4.5 V	$0.70 \times V_{DD}$	_	_	
V <sub>IL</sub>	Р	Input low voltage	All digital inputs	4.5≤V <sub>DD</sub> <5.5 V	_		0.35 × V <sub>DD</sub>	V
				2.7≤V <sub>DD</sub> <4.5 V	_	_	0.30 × V <sub>DD</sub>	
V <sub>hys</sub>	С	Input hysteresi s	All digital inputs	_	0.06 × V <sub>DD</sub>	_	_	mV
I <sub>In</sub>	Р	Input leakage current	Per pin (pins in high impedance input mode)	$V_{IN} = V_{DD}$ or $V_{SS}$	_	0.1	1	μΑ
II <sub>INTOT</sub> I	С			$V_{IN} = V_{DD}$ or $V_{SS}$	_	_	2	μА
R <sub>PU</sub>	Р			_	30.0	_	50.0	kΩ
R <sub>PU</sub> <sup>3</sup>	Р	Pullup resistors	PTA2 and PTA3 pins	_	30.0	_	60.0	kΩ
I <sub>IC</sub>	D	DC	Single pin limit	$V_{IN} < V_{SS}, V_{IN} >$	-2	_	2	mA
			Total MCU limit, includes sum of all stressed pins	V <sub>DD</sub>	-5	_	25	
C <sub>In</sub>	С	Input	capacitance, all pins	_		_	7	pF
V <sub>RAM</sub>	С	· ·	M retention voltage	_	2.0	_	_	V
* HAIVI		10,	: Storition Tollago					

<sup>1.</sup> Typical values are measured at 25  $^{\circ}\text{C}.$  Characterized, not tested.


#### Nonswitching electrical specifications

- 2. Only PTB4, PTB5, PTD0, PTD1, PTE0, PTE1, PTH0 (64-pin and 80-pin packages only), and PTH1 (64-pin and 80-pin packages only) support high current output.
- 3. The specified resistor value is the actual value internal to the device. The pullup value may appear higher when measured externally on the pin.
- 4. All functional non-supply pins, except for PTA2 and PTA3, are internally clamped to  $V_{SS}$  and  $V_{DD}$ . PTA2 and PTA3 are true open drain I/O pins that are internally clamped to  $V_{SS}$ .
- 5. Input must be current limited to the value specified. To determine the value of the required current-limiting resistor, calculate resistance values for positive and negative clamp voltages, then use the larger value.
- 6. Power supply must maintain regulation within operating V<sub>DD</sub> range during instantaneous and operating maximum current conditions. If the positive injection current (V<sub>In</sub> > V<sub>DD</sub>) is higher than I<sub>DD</sub>, the injection current may flow out of V<sub>DD</sub> and could result in external power supply going out of regulation. Ensure that external V<sub>DD</sub> load will shunt current higher than maximum injection current when the MCU is not consuming power, such as when no system clock is present, or clock rate is very low (which would reduce overall power consumption).

Table 4. LVD and POR specification


Symbol	С	Desc	ription	Min	Тур	Max	Unit
V <sub>POR</sub>	D	POR re-arm voltage <sup>1</sup>		1.5	1.75	2.0	V
V <sub>LVDH</sub>	С	threshold—hig	Falling low-voltage detect threshold—high range (LVDV = 1) <sup>2</sup>		4.3	4.4	V
V <sub>LVW1H</sub>	С	Falling low- voltage	Level 1 falling (LVWV = 00)	4.3	4.4	4.5	V
V <sub>LVW2H</sub>	С	warning threshold— high range	Level 2 falling (LVWV = 01)	4.5	4.5	4.6	V
V <sub>LVW3H</sub>	С	riigir range	Level 3 falling (LVWV = 10)	4.6	4.6	4.7	V
V <sub>LVW4H</sub>	С		Level 4 falling (LVWV = 11)	4.7	4.7	4.8	V
V <sub>HYSH</sub>	С		High range low-voltage detect/warning hysteresis		100	<del>_</del>	mV
V <sub>LVDL</sub>	С	threshold—lov	Falling low-voltage detect threshold—low range (LVDV = 0)		2.61	2.66	V
V <sub>LVW1L</sub>	С	Falling low- voltage	Level 1 falling (LVWV = 00)	2.62	2.7	2.78	V
V <sub>LVW2L</sub>	С	warning threshold— low range	Level 2 falling (LVWV = 01)	2.72	2.8	2.88	V
V <sub>LVW3L</sub>	С	low range	Level 3 falling (LVWV = 10)	2.82	2.9	2.98	V
V <sub>LVW4L</sub>	С		Level 4 falling (LVWV = 11)	2.92	3.0	3.08	V
V <sub>HYSDL</sub>	С		Low range low-voltage detect hysteresis		40		mV
V <sub>HYSWL</sub>	С		low-voltage hysteresis	_	80	_	mV
$V_{BG}$	Р	Buffered ban	dgap output 3	1.14	1.16	1.18	V

- 1. Maximum is highest voltage that POR is guaranteed.
- 2. Rising thresholds are falling threshold + hysteresis.
- 3. voltage Factory trimmed at  $V_{DD} = 5.0 \text{ V}$ , Temp = 25 °C

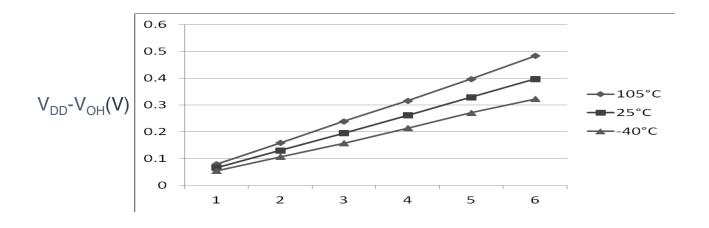

I<sub>OH</sub>(mA)

Figure 1. Typical  $V_{DD}$ - $V_{OH}$  Vs.  $I_{OH}$  (standard drive strength) ( $V_{DD}$  = 5 V)

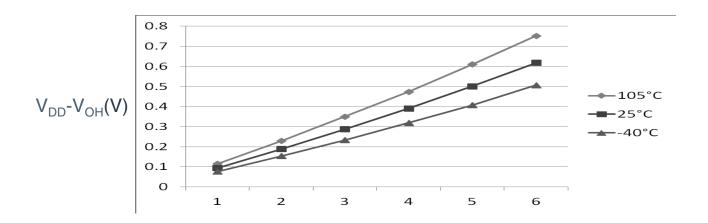

 $I_{OH}(mA)$ 

Figure 2. Typical  $V_{DD}$ - $V_{OH}$  Vs.  $I_{OH}$  (standard drive strength) ( $V_{DD}$  = 3 V)

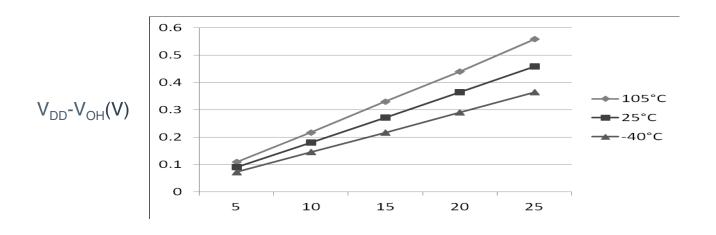


Figure 3. Typical  $V_{DD}$ - $V_{OH}$  Vs.  $I_{OH}$  (high drive strength) ( $V_{DD}$  = 5 V)

 $I_{OH}(mA)$ 


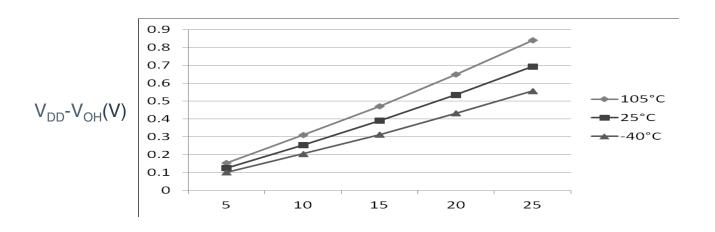



Figure 4. Typical  $V_{DD}$ - $V_{OH}$  Vs.  $I_{OH}$  (high drive strength) ( $V_{DD}$  = 3 V)

 $I_{OH}(mA)$ 

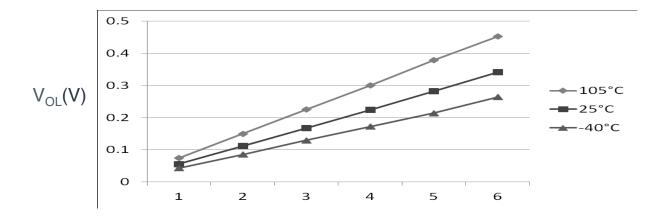

 $I_{OL}(mA)$ 


Figure 5. Typical  $V_{OL}$  Vs.  $I_{OL}$  (standard drive strength) ( $V_{DD} = 5 \text{ V}$ )

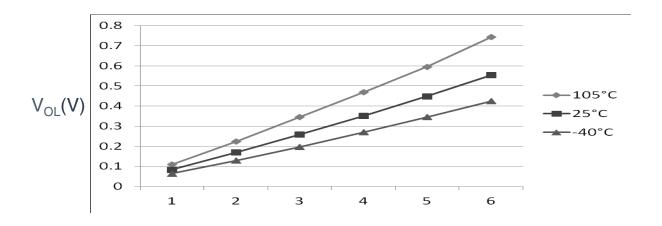

 $I_{OL}(mA)$ 


Figure 6. Typical  $V_{OL}$  Vs.  $I_{OL}$  (standard drive strength) ( $V_{DD}$  = 3 V)

13

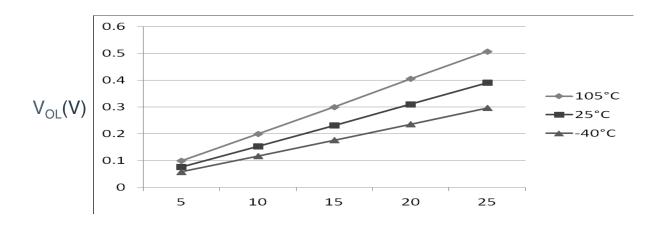

 $I_{OL}(mA)$ 

Figure 7. Typical  $V_{OL}$  Vs.  $I_{OL}$  (high drive strength) ( $V_{DD} = 5 \text{ V}$ )

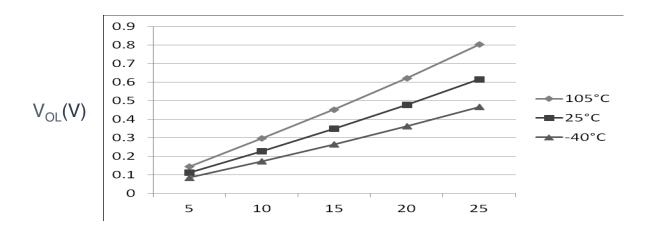

 $I_{OL}(mA)$ 

Figure 8. Typical  $V_{OL}$  Vs.  $I_{OL}$  (high drive strength) ( $V_{DD} = 3 \text{ V}$ )

### 5.1.2 Supply current characteristics

This section includes information about power supply current in various operating modes.

Table 5. Supply current characteristics

С	Parameter	Symbol	Core/Bus Freq	V <sub>DD</sub> (V)	Typical <sup>1</sup>	Max <sup>2</sup>	Unit	Temp
С	Run supply current FEI	RI <sub>DD</sub>	48/24 MHz	5	11.1	_	mA	-40 to 105 °C
С	mode, all modules clocks enabled; run from flash		24/24 MHz		8	_		
С	enabled, full from flash		12/12 MHz		5	_		
С			1/1 MHz		2.4	_		
С			48/24 MHz	3	11	_		
С			24/24 MHz		7.9	_		
С			12/12 MHz		4.9	_		
			1/1 MHz		2.3	_		
С	Run supply current FEI	RI <sub>DD</sub>	48/24 MHz	5	7.8	_	mA	-40 to 105 °C
С	mode, all modules clocks disabled and gated; run		24/24 MHz		5.5	_		
С	from flash		12/12 MHz		3.8	_		
С			1/1 MHz		2.3	_		
С			48/24 MHz	3	7.7	_		
С			24/24 MHz		5.4	_		
С			12/12 MHz		3.7	_		
С			1/1 MHz		2.2	_		
С	Run supply current FBE	$RI_{DD}$	48/24 MHz	5	14.7	_	mA	-40 to 105 °C
Р	mode, all modules clocks enabled; run from RAM		24/24 MHz		9.8	14.9		
С			12/12 MHz		6	_		
С			1/1 MHz		2.4	_		
С			48/24 MHz	3	14.6	_		
Р			24/24 MHz		9.6	12.8		
С			12/12 MHz		5.9	_		
С			1/1 MHz		2.3	_		
С	Run supply current FBE	$RI_DD$	48/24 MHz	5	11.4	_	mA	-40 to 105 °C
Р	mode, all modules clocks disabled and gated; run from RAM		24/24 MHz		7.7	12.5		
С			12/12 MHz		4.7	_		
С			1/1 MHz		2.3	_		
С			48/24 MHz	3	11.3	_		
Р			24/24 MHz		7.6	9.5		
С			12/12 MHz		4.6	_		
			1/1 MHz		2.2	_		

Table continues on the next page...

Table 5.	Supply	current	characte	ristics (	(continued	I)
----------	--------	---------	----------	-----------	------------	----

С	Parameter	Symbol	Core/Bus Freq	V <sub>DD</sub> (V)	Typical <sup>1</sup>	Max <sup>2</sup>	Unit	Temp
С	Wait mode current FEI	WI <sub>DD</sub>	48/24 MHz	5	8.4	_	mA	-40 to 105 °C
Р	mode, all modules clocks enabled		24/24 MHz		6.5	7.2		
С	enabled		12/12 MHz		4.3	_		
С			1/1 MHz		2.4	_		
С			48/24 MHz	3	8.3	_		
Р			24/24 MHz		6.4	7		
С			12/12 MHz		4.2	_		
С			1/1 MHz		2.3	_		
Р	Stop mode supply current	SI <sub>DD</sub>	_	5	2	105	μA	-40 to 105 °C
Р	no clocks active (except 1 kHz LPO clock) <sup>3</sup>		_	3	1.9	95		-40 to 105 °C
С	ADC adder to Stop	_	_	5	86	_	μA	-40 to 105 °C
С	ADLPC = 1			3	82	_		
	ADLSMP = 1							
	ADCO = 1							
	MODE = 10B							
	ADICLK = 11B							
С	ACMP adder to Stop	_	_	5	12	_	μA	-40 to 105 °C
С				3	12	_		
С	LVD adder to Stop <sup>4</sup>	_	_	5	130	_	μA	-40 to 105 °C
С				3	125	_		

- 1. Data in Typical column was characterized at 5.0 V, 25 °C or is typical recommended value.
- 2. The Max current is observed at high temperature of 105 °C.
- 3. RTC adder cause <1 µA I<sub>DD</sub> increase typically, RTC clock source is 1 kHz LPO clock.
- 4. LVD is periodically woken up from Stop by 5% duty cycle. The period is equal to or less than 2 ms.

### 5.1.3 EMC performance

Electromagnetic compatibility (EMC) performance is highly dependent on the environment in which the MCU resides. Board design and layout, circuit topology choices, location and characteristics of external components as well as MCU software operation play a significant role in EMC performance. The system designer must consult the following applications notes, available on nxp.com for advice and guidance specifically targeted at optimizing EMC performance.

- AN2321: Designing for Board Level Electromagnetic Compatibility
- AN1050: Designing for Electromagnetic Compatibility (EMC) with HCMOS Microcontrollers
- AN1263: Designing for Electromagnetic Compatibility with Single-Chip Microcontrollers

KE06 Sub-Family Data Sheet, Rev. 4, 07/2016

#### **Switching specifications**

- AN2764: Improving the Transient Immunity Performance of Microcontroller-Based **Applications**
- AN1259: System Design and Layout Techniques for Noise Reduction in MCU-**Based Systems**

#### 5.1.3.1 **EMC** radiated emissions operating behaviors Table 6. EMC radiated emissions operating behaviors for 80-pin LQFP package

Symbol	Description	Frequency band (MHz)	Тур.	Unit	Notes
V <sub>RE1</sub>	Radiated emissions voltage, band 1	0.15–50	6	dΒμV	1, 2
V <sub>RE2</sub>	V <sub>RE2</sub> Radiated emissions voltage, band 2		6	dΒμV	
V <sub>RE3</sub>	Radiated emissions voltage, band 3	150–500	11	dΒμV	
V <sub>RE4</sub>	Radiated emissions voltage, band 4	500-1000	5	dΒμV	
V <sub>RE_IEC</sub>	IEC level	0.15-1000	N <sup>3</sup>	_	2, 4

- 1. Determined according to IEC Standard 61967-1, Integrated Circuits Measurement of Electromagnetic Emissions, 150 kHz to 1 GHz Part 1: General Conditions and Definitions and IEC Standard 61967-2, Integrated Circuits - Measurement of Electromagnetic Emissions, 150 kHz to 1 GHz Part 2: Measurement of Radiated Emissions – TEM Cell and Wideband TEM Cell Method. Measurements were made while the microcontroller was running basic application code. The reported emission level is the value of the maximum measured emission, rounded up to the next whole number, from among the measured orientations in each frequency range.
- 2.  $V_{DD} = 5.0 \text{ V}$ ,  $T_A = 25 \,^{\circ}\text{C}$ ,  $f_{OSC} = 8 \text{ MHz}$  (crystal),  $f_{SYS} = 40 \,^{\circ}\text{MHz}$ ,  $f_{BUS} = 20 \,^{\circ}\text{MHz}$
- 3. IEC/SAE Level Maximums: N≤12 dBµV, M≤18 dBµV, K≤30 dBµV, I ≤36 dBµV, H≤42 dBµV.
- 4. Specified according to Annex D of IEC Standard 61967-2, Measurement of Radiated Emissions TEM Cell and Wideband TEM Cell Method

### 5.2 Switching specifications

### 5.2.1 Control timing

Table 7. Control timing

Num	С	Rating	J	Symbol	Min	Typical <sup>1</sup>	Max	Unit
1	D	System and core clock		f <sub>Sys</sub>	DC	_	48	MHz
2	Р	Bus frequency (t <sub>cyc</sub> = 1/f <sub>Bus</sub> )	)	f <sub>Bus</sub>	DC	_	24	MHz
3	Р	Internal low power oscillato	f <sub>LPO</sub>	0.67	1.0	1.25	KHz	
4	D	External reset pulse width <sup>2</sup>	t <sub>extrst</sub>	1.5 ×	_	_	ns	
				t <sub>cyc</sub>				
5	D	Reset low drive		t <sub>rstdrv</sub>	$34 \times t_{cyc}$	_	_	ns
6	D	IRQ pulse width	Asynchronous path <sup>2</sup>	t <sub>ILIH</sub>	100		_	ns
	D		Synchronous path <sup>3</sup>	t <sub>IHIL</sub>	$1.5 \times t_{cyc}$		_	ns

Table continues on the next page...

KE06 Sub-Family Data Sheet, Rev. 4, 07/2016

17

Table 7.	Control	timing	(continued)
----------	---------	--------	-------------

Num	С	Rating		Symbol	Min	Typical <sup>1</sup>	Max	Unit
7	D	Keyboard interrupt pulse width	Asynchronous path <sup>2</sup>	t <sub>ILIH</sub>	100	_	_	ns
	D		Synchronous path	t <sub>IHIL</sub>	$1.5 \times t_{cyc}$	_	_	ns
8	С	Port rise and fall time -	_	t <sub>Rise</sub>	_	10.2	_	ns
	С	Normal drive strength (load = 50 pF) <sup>4</sup>		t <sub>Fall</sub>	_	9.5	_	ns
	С	Port rise and fall time -	_	t <sub>Rise</sub>	_	5.4	_	ns
	С	high drive strength (load = 50 pF) <sup>4</sup>	ı (load =		_	4.6	_	ns

- 1. Typical values are based on characterization data at  $V_{DD} = 5.0 \text{ V}$ , 25 °C unless otherwise stated.
- 2. This is the shortest pulse that is guaranteed to be recognized as a RESET pin request.
- 3. This is the minimum pulse width that is guaranteed to pass through the pin synchronization circuitry. Shorter pulses may or may not be recognized. In stop mode, the synchronizer is bypassed so shorter pulses can be recognized.
- 4. Timing is shown with respect to 20% V<sub>DD</sub> and 80% V<sub>DD</sub> levels. Temperature range -40 °C to 105 °C.

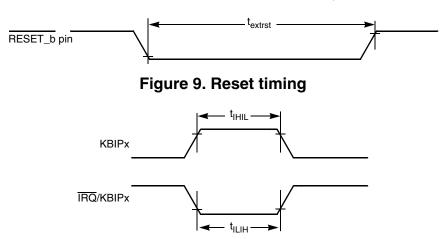


Figure 10. KBIPx timing

### 5.2.2 FTM module timing

Synchronizer circuits determine the shortest input pulses that can be recognized or the fastest clock that can be used as the optional external source to the timer counter. These synchronizers operate from the current bus rate clock.

Table 8. FTM input timing

С	Function	Symbol	Min	Max	Unit
D	Timer clock frequency	f <sub>Timer</sub>	f <sub>Bus</sub>	f <sub>Sys</sub>	Hz
D	External clock frequency	f <sub>TCLK</sub>	0	f <sub>Timer</sub> /4	Hz

Table continues on the next page...

KE06 Sub-Family Data Sheet, Rev. 4, 07/2016

Table 8. FTM input timing (continued)

С	Function	Symbol	Min	Max	Unit
D	External clock period	t <sub>TCLK</sub>	4	_	t <sub>Timer</sub> , 1
D	External clock high time	t <sub>clkh</sub>	1.5	_	t <sub>Timer</sub> 1
D	External clock low time	t <sub>clkl</sub>	1.5	_	t <sub>Timer</sub> 1
D	Input capture pulse width	t <sub>ICPW</sub>	1.5	_	t <sub>Timer</sub> 1

1.  $t_{Timer} = 1/f_{Timer}$ 

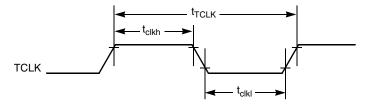


Figure 11. Timer external clock

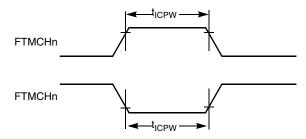


Figure 12. Timer input capture pulse

# 5.3 Thermal specifications

### 5.3.1 Thermal operating requirements

Table 9. Thermal operating requirements

Symbol	Description	Min.	Max.	Unit	Notes
T <sub>J</sub>	Die junction temperature	-40	125	°C	
T <sub>A</sub>	Ambient temperature	-40	105	°C	1

1. Maximum  $T_A$  can be exceeded only if the user ensures that  $T_J$  does not exceed maximum  $T_J$ . The simplest method to determine  $T_J$  is:  $T_J = T_A + \theta_{JA} x$  chip power dissipation

### 5.3.2 Thermal characteristics

This section provides information about operating temperature range, power dissipation, and package thermal resistance. Power dissipation on I/O pins is usually small compared to the power dissipation in on-chip logic and voltage regulator circuits, and it is user-determined rather than being controlled by the MCU design. To take  $P_{I/O}$  into account in power calculations, determine the difference between actual pin voltage and  $V_{SS}$  or  $V_{DD}$  and multiply by the pin current for each I/O pin. Except in cases of unusually high pin current (heavy loads), the difference between pin voltage and  $V_{SS}$  or  $V_{DD}$  will be very small.

Board type	Symbol	Description	64 LQFP	64 QFP	44 LQFP	80 LQFP	Unit	Notes
Single-layer (1S)	$R_{ heta JA}$	Thermal resistance, junction to ambient (natural convection)	71	61	75	57	°C/W	1, 2
Four-layer (2s2p)	$R_{\theta JA}$	Thermal resistance, junction to ambient (natural convection)	53	47	53	44	°C/W	1, 3
Single-layer (1S)	R <sub>θJMA</sub>	Thermal resistance, junction to ambient (200 ft./min. air speed)	59	50	62	47	°C/W	1, 3
Four-layer (2s2p)	R <sub>θJMA</sub>	Thermal resistance, junction to ambient (200 ft./min. air speed)	46	41	47	38	°C/W	1, 3
_	R <sub>0JB</sub>	Thermal resistance, junction to board	35	32	34	28	°C/W	4
_	R <sub>0JC</sub>	Thermal resistance, junction to case	20	23	20	15	°C/W	5
_	Ψ <sub>JT</sub>	Thermal characterization parameter, junction to package top outside center (natural convection)	5	8	5	3	°C/W	6

Table 10. Thermal attributes

- Junction temperature is a function of die size, on-chip power dissipation, package thermal resistance, mounting site (board) temperature, ambient temperature, air flow, power dissipation of other components on the board, and board thermal resistance.
- 2. Per JEDEC JESD51-2 with the single layer board (JESD51-3) horizontal.
- 3. Per JEDEC JESD51-6 with the board (JESD51-7) horizontal.
- 4. Thermal resistance between the die and the printed circuit board per JEDEC JESD51-8. Board temperature is measured on the top surface of the board near the package.
- 5. Thermal resistance between the die and the solder pad on the bottom of the package. Interface resistance is ignored.
- 6. Thermal characterization parameter indicating the temperature difference between package top and the junction temperature per JEDEC JESD51-2. When Greek letters are not available, the thermal characterization.

The average chip-junction temperature (T<sub>J</sub>) in °C can be obtained from:

$$T_J = T_A + (P_D \times \theta_{JA})$$

KE06 Sub-Family Data Sheet, Rev. 4, 07/2016

Peripheral operating requirements and behaviors

Where:

 $T_A = Ambient temperature, °C$ 

 $\theta_{JA}$  = Package thermal resistance, junction-to-ambient, °C/W

$$P_D = P_{int} + P_{I/O}$$

 $P_{int} = I_{DD} \times V_{DD}$ , Watts - chip internal power

 $P_{I/O}$  = Power dissipation on input and output pins - user determined

For most applications,  $P_{I/O} \ll P_{int}$  and can be neglected. An approximate relationship between  $P_D$  and  $T_I$  (if  $P_{I/O}$  is neglected) is:

$$P_D = K \div (T_I + 273 \, ^{\circ}C)$$

Solving the equations above for K gives:

$$K = P_D \times (T_A + 273 \text{ }^{\circ}\text{C}) + \theta_{JA} \times (P_D)^2$$

where K is a constant pertaining to the particular part. K can be determined by measuring  $P_D$  (at equilibrium) for an known  $T_A$ . Using this value of K, the values of  $P_D$  and  $P_D$  and  $P_D$  and  $P_D$  are obtained by solving the above equations iteratively for any value of  $P_D$ .

# 6 Peripheral operating requirements and behaviors

### 6.1 Core modules

### 6.1.1 SWD electricals

Table 11. SWD full voltage range electricals

Symbol	Description	Min.	Max.	Unit
	Operating voltage	2.7	5.5	V
J1	SWD_CLK frequency of operation			
	Serial wire debug	0	24	MHz
J2	SWD_CLK cycle period	1/J1	_	ns
J3	SWD_CLK clock pulse width			
	Serial wire debug	20	_	ns
J4	SWD_CLK rise and fall times	_	3	ns
J9	SWD_DIO input data setup time to SWD_CLK rise	10	_	ns
J10	SWD_DIO input data hold time after SWD_CLK rise	3	_	ns

Table continues on the next page...

Table 11. SWD full voltage range electricals (continued)

Symbol	Description	Min.	Max.	Unit
J11	SWD_CLK high to SWD_DIO data valid	_	35	ns
J12	SWD_CLK high to SWD_DIO high-Z	5	_	ns

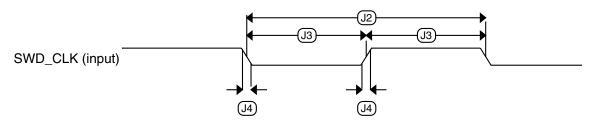


Figure 13. Serial wire clock input timing

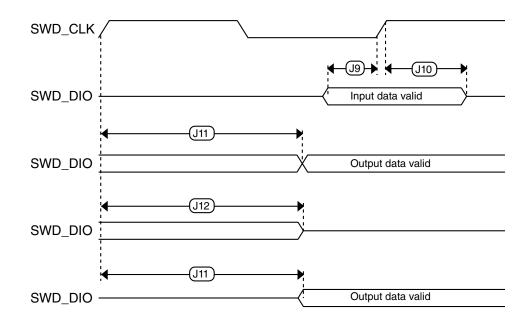


Figure 14. Serial wire data timing

#### External oscillator (OSC) and ICS characteristics 6.2

Table 12. OSC and ICS specifications (temperature range = -40 to 105 °C ambient)

Num	С	Characteristic		Symbol	Min	Typical <sup>1</sup>	Max	Unit
1	С	Crystal or	Low range (RANGE = 0)	f <sub>lo</sub>	31.25	32.768	39.0625	kHz
	С	resonator frequency	High range (RANGE = 1)	f <sub>hi</sub>	4	<del>_</del>	24	MHz

Table continues on the next page...

KE06 Sub-Family Data Sheet, Rev. 4, 07/2016 21 **NXP Semiconductors** 

Peripheral operating requirements and behaviors

Table 12. OSC and ICS specifications (temperature range = -40 to 105 °C ambient) (continued)

Num	m C Cha		haracteristic	Symbol	Min	Typical <sup>1</sup>	Max	Unit
2	D	Lo	oad capacitors	C1, C2		See Note <sup>2</sup>		
3	D	Feedback resistor	Low Frequency, Low-Power Mode <sup>3</sup>	R <sub>F</sub>	_	_	_	ΜΩ
			Low Frequency, High-Gain Mode		_	10	_	ΜΩ
			High Frequency, Low- Power Mode		_	1	_	ΜΩ
			High Frequency, High-Gain Mode		_	1	_	ΜΩ
4	D	Series resistor -	Low-Power Mode <sup>3</sup>	R <sub>S</sub>	_	0	_	kΩ
		Low Frequency	High-Gain Mode		_	200	_	kΩ
5	D	Series resistor - High Frequency	Low-Power Mode <sup>3</sup>	R <sub>S</sub>	_	0	_	kΩ
	D	Series resistor -	4 MHz		_	0	_	kΩ
	D	High Frequency,	8 MHz		_	0	_	kΩ
	D	High-Gain Mode	16 MHz		_	0	_	kΩ
6	С	Crystal start-up	Low range, low power	t <sub>CSTL</sub>	_	1000	_	ms
	С	time low range = 32.768 kHz	Low range, high gain		_	800	_	ms
	С	crystal; High	High range, low power	t <sub>CSTH</sub>	_	3	_	ms
	С	range = 20 MHz crystal <sup>4,5</sup>	High range, high gain		_	1.5	_	ms
7	Т	Internal re	eference start-up time	t <sub>IRST</sub>	_	20	50	μs
8	Р	Internal reference	e clock (IRC) frequency trim range	f <sub>int_t</sub>	31.25	_	39.0625	kHz
9	Р	Internal reference clock frequency, factory trimmed	T = 25 °C, V <sub>DD</sub> = 5 V	f <sub>int_ft</sub>	_	37.5	_	kHz
10	Р	DCO output frequency range	FLL reference = fint_t, flo, or fhi/RDIV	f <sub>dco</sub>	40	_	50	MHz
11	Р	Factory trimmed internal oscillator accuracy	T = 25 °C, V <sub>DD</sub> = 5 V	Δf <sub>int_ft</sub>	-0.5	_	0.5	%
12	С	Deviation of IRC over	Over temperature range from -40 °C to 105°C	Δf <sub>int_t</sub>	-1	_	0.5	%
		temperature when trimmed at T = 25 °C, V <sub>DD</sub> = 5 V	Over temperature range from 0 °C to 105°C	Δf <sub>int_t</sub>	-0.5	_	0.5	
13	С	Frequency accuracy of	Over temperature range from -40 °C to 105°C	$\Delta f_{dco\_ft}$	-1.5	_	1	%
		DCO output using factory trim value	Over temperature range from 0 °C to 105°C	$\Delta f_{dco\_ft}$	-1	_	1	

Table continues on the next page...

23

Table 12. OSC and ICS specifications (temperature range = -40 to 105 °C ambient) (continued)

Num	С	Characteristic	Symbol	Min	Typical <sup>1</sup>	Max	Unit
14	С	FLL acquisition time <sup>4,6</sup>	t <sub>Acquire</sub>	_	_	2	ms
15	С	Long term jitter of DCO output clock (averaged over 2 ms interval) <sup>7</sup>	C <sub>Jitter</sub>	_	0.02	0.2	%f <sub>dco</sub>

- 1. Data in Typical column was characterized at 5.0 V, 25 °C or is typical recommended value.
- 2. See crystal or resonator manufacturer's recommendation.
- 3. Load capacitors (C<sub>1</sub>,C<sub>2</sub>), feedback resistor (R<sub>F</sub>) and series resistor (R<sub>S</sub>) are incorporated internally when RANGE = HGO =
- 4. This parameter is characterized and not tested on each device.
- 5. Proper PC board layout procedures must be followed to achieve specifications.
- 6. This specification applies to any time the FLL reference source or reference divider is changed, trim value changed, or changing from FLL disabled (FBELP, FBILP) to FLL enabled (FEI, FEE, FBE, FBI). If a crystal/resonator is being used as the reference, this specification assumes it is already running.
- 7. Jitter is the average deviation from the programmed frequency measured over the specified interval at maximum f<sub>Bus</sub>. Measurements are made with the device powered by filtered supplies and clocked by a stable external clock signal. Noise injected into the FLL circuitry via V<sub>DD</sub> and V<sub>SS</sub> and variation in crystal oscillator frequency increase the C<sub>Jitter</sub> percentage for a given interval.

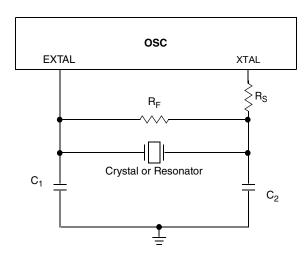


Figure 15. Typical crystal or resonator circuit

### 6.3 NVM specifications

This section provides details about program/erase times and program/erase endurance for the flash memories.

Table 13. Flash characteristics

С	Characteristic	Symbol	Min <sup>1</sup>	Typical <sup>2</sup>	Max <sup>3</sup>	Unit <sup>4</sup>
D	Supply voltage for program/erase -40 °C to 105 °C	V <sub>prog/erase</sub>	2.7	_	5.5	V
D	Supply voltage for read operation	V <sub>Read</sub>	2.7	_	5.5	V

Table continues on the next page...

KE06 Sub-Family Data Sheet, Rev. 4, 07/2016

Table 13. Flash characteristics (continued)

С	Characteristic	Symbol	Min <sup>1</sup>	Typical <sup>2</sup>	Max <sup>3</sup>	Unit <sup>4</sup>
D	NVM Bus frequency	f <sub>NVMBUS</sub>	1	_	24	MHz
D	NVM Operating frequency	f <sub>NVMOP</sub>	0.8	1	1.05	MHz
D	Erase Verify All Blocks	$t_{VFYALL}$	_	_	2605	t <sub>cyc</sub>
D	Erase Verify Flash Block	t <sub>RD1BLK</sub>	_	_	2579	t <sub>cyc</sub>
D	Erase Verify Flash Section	t <sub>RD1SEC</sub>	_	_	485	t <sub>cyc</sub>
D	Read Once	t <sub>RDONCE</sub>	_	_	464	t <sub>cyc</sub>
D	Program Flash (2 word)	t <sub>PGM2</sub>	0.12	0.13	0.31	ms
D	Program Flash (4 word)	t <sub>PGM4</sub>	0.21	0.21	0.49	ms
D	Program Once	t <sub>PGMONCE</sub>	0.20	0.21	0.21	ms
D	Erase All Blocks	t <sub>ERSALL</sub>	95.42	100.18	100.30	ms
D	Erase Flash Block	t <sub>ERSBLK</sub>	95.42	100.18	100.30	ms
D	Erase Flash Sector	t <sub>ERSPG</sub>	19.10	20.05	20.09	ms
D	Unsecure Flash	t <sub>UNSECU</sub>	95.42	100.19	100.31	ms
D	Verify Backdoor Access Key	$t_{VFYKEY}$	_	_	482	t <sub>cyc</sub>
D	Set User Margin Level	t <sub>MLOADU</sub>	_	_	415	t <sub>cyc</sub>
С	FLASH Program/erase endurance $T_L$ to $T_H$ = -40 °C to 105 °C	n <sub>FLPE</sub>	10 k	100 k	_	Cycles
С	Data retention at an average junction temperature of T <sub>Javg</sub> = 85°C after up to 10,000 program/erase cycles	t <sub>D_ret</sub>	15	100	_	years

- 1. Minimum times are based on maximum  $f_{NVMOP}$  and maximum  $f_{NVMBUS}$
- 2. Typical times are based on typical  $f_{NVMOP}$  and maximum  $f_{NVMBUS}$
- 3. Maximum times are based on typical f<sub>NVMOP</sub> and typical f<sub>NVMBUS</sub> plus aging
- 4.  $t_{cyc} = 1 / f_{NVMBUS}$

Program and erase operations do not require any special power sources other than the normal V<sub>DD</sub> supply. For more detailed information about program/erase operations, see the Flash Memory Module section in the reference manual.

# 6.4 Analog

### 6.4.1 ADC characteristics

Table 14. 5 V 12-bit ADC operating conditions

Characteri stic	Conditions	Symbol	Min	Typ <sup>1</sup>	Max	Unit	Comment
Reference potential	<ul><li>Low</li><li>High</li></ul>	V <sub>REFL</sub>	V <sub>SSA</sub>	_	V <sub>DDA</sub> /2	V	_
poteritiai	- Tilgii	$V_{REFH}$	V <sub>DDA</sub> /2	_	$V_{DDA}$		

Table continues on the next page...

Table 14.	5 V 12-bit AD0	Coperating condit	ions (continued)
-----------	----------------	-------------------	------------------

Characteri stic	Conditions	Symbol	Min	Typ <sup>1</sup>	Max	Unit	Comment
Supply	Absolute	V <sub>DDA</sub>	2.7	_	5.5	V	_
voltage	Delta to V <sub>DD</sub> (V <sub>DD</sub> -V <sub>DDA</sub> )	$\Delta V_{DDA}$	-100	0	+100	mV	_
Input voltage		V <sub>ADIN</sub>	$V_{REFL}$	_	V <sub>REFH</sub>	V	_
Input capacitance		C <sub>ADIN</sub>	_	4.5	5.5	pF	_
Input resistance		R <sub>ADIN</sub>	_	3	5	kΩ	_
Analog source	12-bit mode • f <sub>ADCK</sub> > 4 MHz	R <sub>AS</sub>	_	_	2	kΩ	External to MCU
resistance	• f <sub>ADCK</sub> < 4 MHz	_	_	_	5		
	10-bit mode • f <sub>ADCK</sub> > 4 MHz		<u> </u>	_	5		
	• f <sub>ADCK</sub> < 4 MHz		_	_	10		
	8-bit mode		_	_	10		
	(all valid f <sub>ADCK</sub> )						
ADC	High speed (ADLPC=0)	f <sub>ADCK</sub>	0.4	_	8.0	MHz	_
conversion clock frequency	Low power (ADLPC=1)		0.4	_	4.0		

1. Typical values assume  $V_{DDA} = 5.0 \text{ V}$ , Temp = 25°C,  $f_{ADCK} = 1.0 \text{ MHz}$  unless otherwise stated. Typical values are for reference only and are not tested in production.

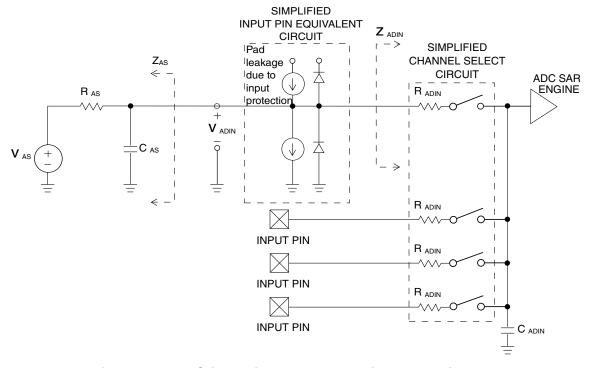


Figure 16. ADC input impedance equivalency diagram