# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



### **Pressure**

## **Freescale Semiconductor**

Media Resistant, Integrated Silicon Pressure Sensor for Manifold Absolute Pressure, Altimeter or Barometer Applications On-Chip Signal Conditioned, Temperature Compensated and Calibrated

The MPX4115A series is designed to sense absolute air pressure in altimeter or barometer (BAP) applications. Freescale's BAP sensor integrates on-chip, bipolar op amp circuitry and thin film resistor networks to provide a high level analog output signal and temperature compensation. The small form factor and high reliability of on-chip integration makes the Freescale BAP sensor a logical and economical choice for application designers.

### Features

- 1.5% Maximum Error Over 0° to 85°C
- · Ideally Suited for Microprocessor Interfacing or Microcontroller-Based Systems
- Temperature Compensated Over -40°C to +125°C
- Durable Epoxy Unibody Element or Thermoplastic (PPS) Surface Mount Package
- Available as Standard Fluorosilicone Gel (MPXA4115A, MPX4115A) or Media Resistant Gel (MPXAZ4115A)

## MPX4115A Series

INTEGRATED PRESSURE SENSOR 15 to 115 kPa (2.2 to 16.7 psi) 0.2 to 4.8 V Output

## **Application Examples**

- Altimeter
- Barometer
- Aviation Altimeters
- Industrial Controls
- Engine Control
- Weather Stations and Weather Reporting Devices

				•••••				
Package	Case		# of Ports	s		Pressure Typ	e	Davias Marking
Options	No.	None	Single	Dual	Gauge	Differential	Absolute	- Device Marking
IPX4115A Series)								
Tray	867-08	•					•	MPX4115A
Tray	867B-04		•				•	MPX4115AP
Tray	867E-03		•				•	MPX4115A
ge (Media Resista	ant Gel) (MPX	AZ4115	A Series)					
Rails	482	•					•	MPXAZ4115A
Rails	482A		•				•	MPXAZ4115A
Tape and Reel	482	•					•	MPXAZ4115A
ge (MPXA4115A S	Series)							
Rails	482A		•				•	MPXA4115A
Tray	1369-01		•				•	MPXA4115AP
Tape and Reel	482	•					•	MPXA4115A
Rails	482	•					•	MPXA4115A
	Options IPX4115A Series) Tray Tray ge (Media Resista Rails Rails Tape and Reel ge (MPXA4115A S Rails Tray Tray Tape and Reel	Options     No.       IPX4115A Series)     Tray     867-08       Tray     867B-04     867E-03       Tray     867E-03     867E-03       ge (Media Resistant Gel) (MPX     Rails     482       Rails     482     482       Tape and Reel     482     482       ge (MPXA4115A Series)     Rails     482A       Tray     1369-01     Tape and Reel     482	OptionsNo.NoneIPX4115A Series)Tray867-08•Tray867B-04••Tray867E-03••ge (Media Resistant Gel) (MPXAZ4115Rails482•Rails482A••Tape and Reel482••ge (MPXA4115A Series)•••Rails482A•••Tape and Reel482••Tape and Reel482A••Tape and Reel482••Tape and Reel482••Tape and Reel482••	Options     No.     None     Single       IPX4115A Series)     -     <	Options     No.     None     Single     Dual       IPX4115A Series)     Tray     867-08     •        Tray     867-08     •         Tray     867-08     •         Tray     867B-04     •         Tray     867E-03     •         ge (Media Resistant Gel) (MPXAZ4115A Series)          Rails     482     •          Tape and Reel     482     •	Options     No.     None     Single     Dual     Gauge       IPX4115A Series)     Tray     867-08     • <td>Options     No.     None     Single     Dual     Gauge     Differential       IPX4115A Series)     Tray     867-08     •</td> <td>OptionsNo.NoneSingleDualGaugeDifferentialAbsoluteIPX4115A Series)Tray867-08••••Tray867B-04••••Tray867E-03••••Tray867E-03••••ge (Media Resistant Gel) (MPXAZ4115A Series)Rails482•••Rails482A•••Tape and Reel482•••Rails482A•••Tray1369-01•••Tape and Reel482•••Tape and Reel482•••</td>	Options     No.     None     Single     Dual     Gauge     Differential       IPX4115A Series)     Tray     867-08     •	OptionsNo.NoneSingleDualGaugeDifferentialAbsoluteIPX4115A Series)Tray867-08••••Tray867B-04••••Tray867E-03••••Tray867E-03••••ge (Media Resistant Gel) (MPXAZ4115A Series)Rails482•••Rails482A•••Tape and Reel482•••Rails482A•••Tray1369-01•••Tape and Reel482•••Tape and Reel482•••

ORDERING INFORMATION




MPX4115A Rev 5, 1/2009

#### UNIBODY PACKAGES



MPX4115A CASE 867-08



MPX4115AP CASE 867B-04

## SMALL OUTLINE PACKAGES



MPXAZ4115A6U/T1 MPXA4115A6U/T1 CASE 482-01



MPXAZ4115AC6U MPXA4115AC6U CASE 482A-01





MPXA4115AP CASE 1369-01

## **Operating Characteristics**

**Table 1. Operating Characteristics** ( $V_S = 5.1$  Vdc,  $T_A = 25^{\circ}C$  unless otherwise noted, P1 > P2. Decoupling circuit shown in Figure 3 required to meet electrical specifications.)

Characteristic		Symbol	Min	Тур	Max	Unit
Pressure Range <sup>(1)</sup>		P <sub>OP</sub>	15	_	115	kPa
Supply Voltage <sup>(2)</sup>		V <sub>S</sub>	4.85	5.1	5.35	Vdc
Supply Current		۱ <sub>0</sub>	_	7.0	10	mAdc
Minimum Pressure Offset @ $V_S = 5.1$ Volts <sup>(3)</sup>	(0 to 85°C)	V <sub>off</sub>	0.135	0.204	0.273	Vdc
Full Scale Output @ $V_S = 5.1$ Volts <sup>(4)</sup>	(0 to 85°C)	V <sub>FSO</sub>	4.725	4.794	4.863	Vdc
Full Scale Span @ V <sub>S</sub> = 5.1 Volts <sup>(5)</sup>	(0 to 85°C)	V <sub>FSS</sub>	4.521	4.59	4.659	Vdc
Accuracy <sup>(6)</sup>	(0 to 85°C)	—	—	—	±1.5	%V <sub>FSS</sub>
Sensitivity		V/P	_	46	_	mV/kPa
Response Time <sup>(7)</sup>		t <sub>R</sub>	—	1.0	_	ms
Output Source Current at Full Scale Output		l <sub>o</sub> +	_	0.1	_	mAdc
Warm-Up Time <sup>(8)</sup>		—	—	20	—	mSec
Offset Stability <sup>(9)</sup>		—	_	±0.5	—	%V <sub>FSS</sub>

1. 1.0 kPa (kiloPascal) equals 0.145 psi.

2. Device is ratiometric within this specified excitation range.

3. Offset (Voff) is defined as the output voltage at the minimum rated pressure.

4. Full Scale Output ( $V_{FSO}$ ) is defined as the output voltage at the maximum or full rated pressure.

5. Full Scale Span (V<sub>FSS</sub>) is defined as the algebraic difference between the output voltage at full rated pressure and the output voltage at the minimum rated pressure.

6. Accuracy (error budget) consists of the following:

Linearity:	Output deviation from a straight line relationship with pressure over the specified pressure range.
Temperature Hysteresis:	Output deviation at any temperature within the operating temperature range, after the temperature is cycled to
	and from the minimum or maximum operating temperature points, with zero differential pressure applied.
Pressure Hysteresis:	Output deviation at any pressure within the specified range, when this pressure is cycled to and from the
	minimum or maximum rated pressure, at 25°C.
TcSpan:	Output deviation over the temperature range of 0 to 85°C, relative to 25°C.
TcOffset:	Output deviation with minimum rated pressure applied, over the temperature range of 0 to 85°C, relative to 25°C.
Variation from Nominal:	The variation from nominal values, for Offset or Full Scale Span, as a percent of V <sub>FSS</sub> , at 25°C.

7. Response Time is defined as the time for the incremental change in the output to go from 10% to 90% of its final value when subjected to a specified step change in pressure.

8. Warm-up Time is defined as the time required for the product to meet the specified output voltage after the Pressure has been stabilized.

9. Offset Stability is the product's output deviation when subjected to 1000 hours of Pulsed Pressure, Temperature Cycling with Bias Test.


## **Maximum Ratings**

#### Table 2. MAXIMUM RATINGS<sup>(1)</sup>

Rating	Symbol	Value	Unit
Maximum Pressure (P1 > P2)	P <sub>MAX</sub>	400	kPa
Storage Temperature	T <sub>stg</sub>	-40 to +125	°C
Operating Temperature	T <sub>A</sub>	-40 to +125	°C

1. Exposure beyond the specified limits may cause permanent damage or degradation to the device.

Figure 1 shows a block diagram of the internal circuitry integrated on a pressure sensor chip.

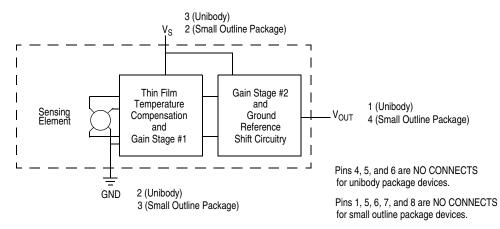



## **On-chip Temperature Compensation and Calibration**

Figure 2 illustrates an absolute sensing chip in the basic chip carrier (Case 867) and the small outline chip carrier (Case 482). A fluorosilicone gel isolates the die surface and wire bonds from the environment, while allowing the pressure signal to be transmitted to the sensor diaphragm. The MPX4115A series pressure sensor operating characteristics, and internal reliability and qualification tests are based on use of dry air as the pressure media. Media, other than dry air, may have adverse effects on sensor performance and long-term reliability. Contact the factory for information regarding media compatibility in your application.

Figure 3 shows the recommended decoupling circuit for interfacing the output of the integrated sensor to the A/D input of a microprocessor or microcontroller. Proper decoupling of the power supply is recommended.

Figure 4 shows the sensor output signal relative to pressure input. Typical, minimum, and maximum output curves are shown for operation over a temperature range of 0° to 85°C using the decoupling circuit shown in Figure 3. (The output will saturate outside of the specified pressure range.)

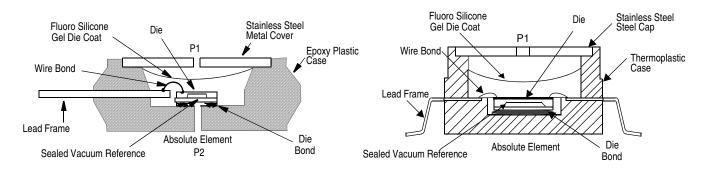


Figure 2. Cross-Sectional Diagram (not to scale)


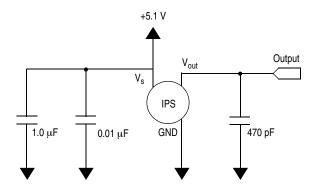


Figure 3. Recommended Power Supply Decoupling and Output Filtering (For output filtering recommendations, refer to Application Note AN1646.)

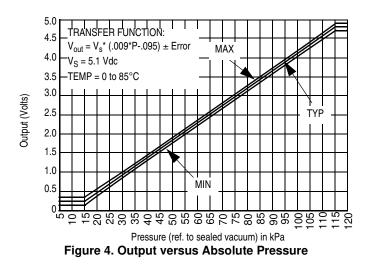



## Pressure

- Transfer Function (MPX4115A) -

```
Nominal Transfer Value: V<sub>d</sub>
```

$$\begin{split} & \mathsf{V}_{out} = \mathsf{V}_S \; (\mathsf{P} \; x \; 0.009 - 0.095) \\ & \pm \; (\mathsf{Pressure Error} \; x \; \mathsf{Temp. Factor} \; x \; 0.009 \; x \; \mathsf{V}_S) \\ & \mathsf{V}_S = 5.1 \; \mathsf{V} \pm 0.25 \; \mathsf{Vdc} \end{split}$$

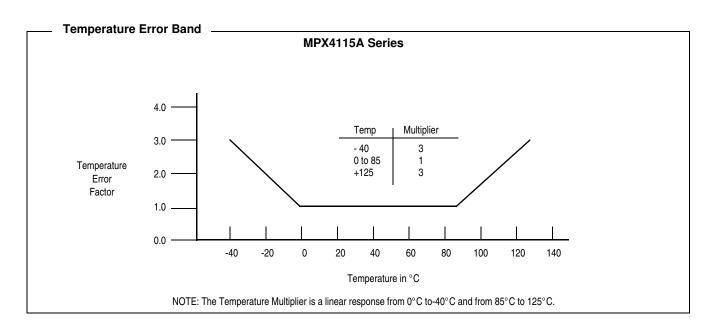

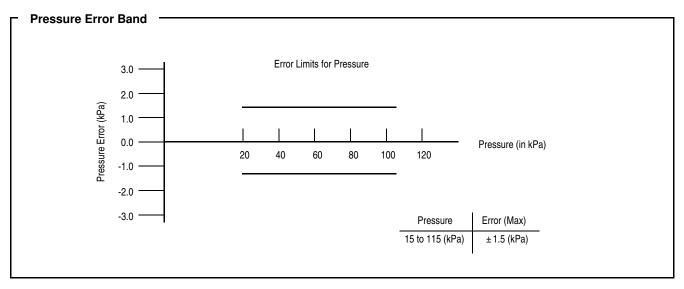



#### PRESSURE (P1)/VACUUM (P2) SIDE IDENTIFICATION TABLE

The two sides of the pressure sensor are designated as the Pressure (P1) side and the Vacuum (P2) side. The Pressure (P1) side is the side containing fluorosilicone gel, which protects the die from harsh media. The MPX pressure sensor is designed to operate with positive differential pressure applied, P1 > P2.

The Pressure (P1) side may be identified by using the following table:

Part Number	Case Type	Pressure (P1) Side Identifier
MPX4115A	867	Stainless Steel Cap
MPX4115AP	867B	Side with Part Marking
MPX4115AS	867E	Side with Port Attached
MPXAZ4115A6U/T1, MPXA4115A6U/T1	482	Side with Part Marking
MPXAZ4115AC6U, MPXA4115AC6U	482A	Side with Port Attached
MPXA4115AP	1369	Side with Port Attached

#### **INFORMATION FOR USING THE SMALL OUTLINE PACKAGE (CASE 482)**

#### MINIMUM RECOMMENDED FOOTPRINT FOR SURFACE MOUNTED APPLICATIONS

Surface mount board layout is a critical portion of the total design. The footprint for the surface mount packages must be the correct size to ensure proper solder connection interface between the board and the package. With the correct

footprint, the packages will self align when subjected to a solder reflow process. It is always recommended to design boards with a solder mask layer to avoid bridging and shorting between solder pads.




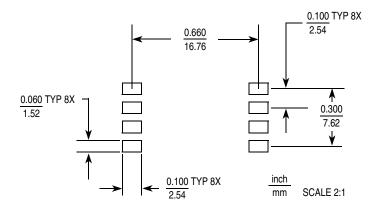


Figure 5. SOP Footprint (Case 482)

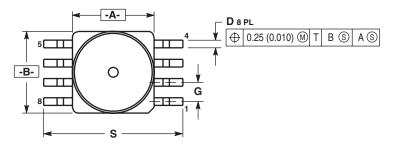






NOTES: 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: INCH. 3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION. 4. MAXIMUM MOLD PROTRUSION 0.15 (0.006). 5. ALL VERTICAL SURFACES 5' TYPICAL DRAFT.

	INC	HES	MILLIM	ETERS	
DIM	MIN	MAX	MIN	MAX	
Α	0.415	0.425	10.54	10.79	
В	0.415	0.425	10.54	10.79	
С	0.212	0.230	5.38	5.84	
D	0.038	0.042	0.96	1.07	
G	0.100	BSC	2.54 BSC		
Н	0.002	0.010	0.05	0.25	
J	0.009	0.011	0.23	0.28	
Κ	0.061	0.071	1.55	1.80	
Μ	0°	7°	0°	7°	
Ν	0.405	0.415	10.29	10.54	
S	0.709	0.725	18.01	18.41	


CASE 482-01 **ISSUE O** SMALL OUTLINE PACKAGE

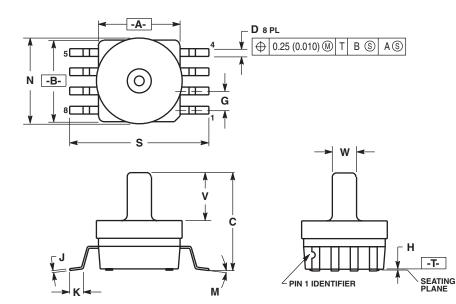

NOTES: 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: INCH. 3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION. 4. MAXIMUM MOLD PROTRUSION 0.15 (0.006). 5. ALL VERTICAL SURFACES 5' TYPICAL DRAFT.

	INCHES		MILLIM	ETERS
DIM	MIN	MAX	MIN	MAX
Α	0.415	0.425	10.54	10.79
В	0.415	0.425	10.54	10.79
С	0.500	0.520	12.70	13.21
D	0.038	0.042	0.96	1.07
G	0.100	) BSC	2.54 BSC	
Н	0.002	0.010	0.05	0.25
J	0.009	0.011	0.23	0.28
Κ	0.061	0.071	1.55	1.80
М	0°	7°	0°	7°
Ν	0.444	0.448	11.28	11.38
S	0.709	0.725	18.01	18.41
٧	0.245	0.255	6.22	6.48
W	0.115	0.125	2.92	3.17

CASE 482A-01 **ISSUE A** SMALL OUTLINE PACKAGE

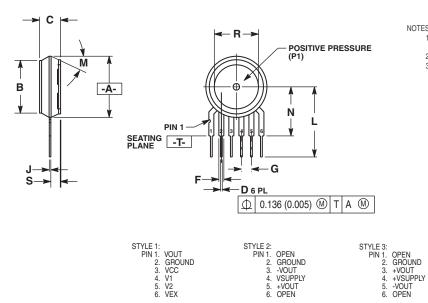


NOTES:

1. DIMENSIONING AND TOLERANCING PER

 DIMENSIONING AND TOLEHANGING PEH ANSI Y14.5M, 1982.
CONTROLLING DIMENSION: INCH.
DIMENSION -A- IS INCLUSIVE OF THE MOLD STOP RING, MOLD STOP RING NOT TO EXCEED 10.02 (2001) 16.00 (0.630).


	INC	INCHES MILLIN			
DIM	MIN	MAX	MIN	MAX	
Α	0.595	0.630	15.11	16.00	
в	0.514	0.534	13.06	13.56	
С	0.200	0.220	5.08	5.59	
D	0.027	0.033	0.68	0.84	
F	0.048	0.064	1.22	1.63	
G	0.100	BSC	2.54 BSC		
J	0.014	0.016	0.36	0.40	
L	0.695	0.725	17.65	18.42	
Μ	30° 1	MOM	30° NOM		
Ν	0.475	0.495	12.07	12.57	
R	0.430	0.450	10.92	11.43	
s	0.090	0.105	2.29	2.66	

CASE 867-08 **ISSUE N BASIC ELEMENT** 

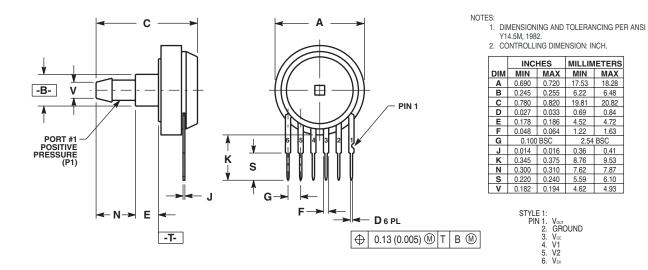

CASE 867E-O3 ISSUE D STOVE PIPE PORT (AS)

MPX4115A

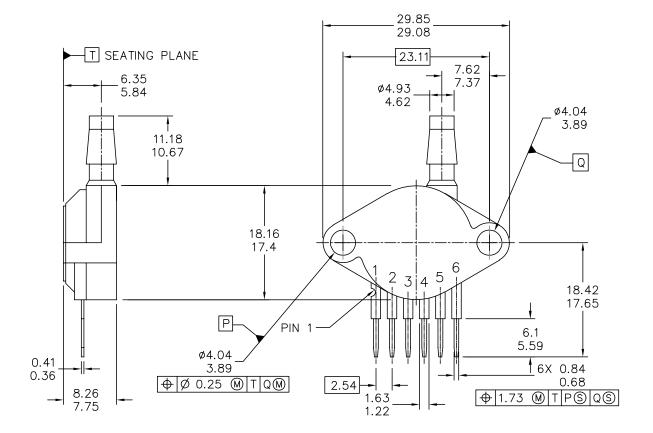

© FREESCALE SEMICONDUCTOR, INC. ALL RIGHTS RESERVED.	MECHANICA	LOUTLINE	PRINT VERSION NO	IT TO SCALE
TITLE:		DOCUMENT NO	1: 98ASB42796B	RE∨: G
SENSOR, 6 LEAD UNIBO	CASE NUMBER: 867B-04 28 JUL 2			
AP & GP 01ASB09	STANDARD: NE	IN-JEDEC		

PAGE 1 OF 2

CASE 867B-04 ISSUE G PORTED (AP)

MPX4115A

#### NOTES:

- 1. DIMENSIONS ARE IN MILLIMETERS.
- 2. DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
- 3. 867B-01 THRU -3 OBSOLETE, NEW STANDARD 867B-04.


STYLE 1:


PIN	1:	V OUT
	2:	GROUND
	3:	VCC
	4:	V1
	5:	V2
	6:	V EX

© FREESCALE SEMICONDUCTOR, INC. ALL RIGHTS RESERVED.	MECHANICA	LOUTLINE	PRINT VERSION NO	T TO SCALE
TITLE:		DOCUMENT NO	): 98ASB42796B	REV: G
SENSOR, 6 LEAD UNIBO	CASE NUMBER	8: 867B-04	28 JUL 2005	
AP & GP 01ASB09	STANDARD: NO	DN-JEDEC		

PAGE 2 OF 2

#### CASE 867B-04 ISSUE G PORTED (AP)

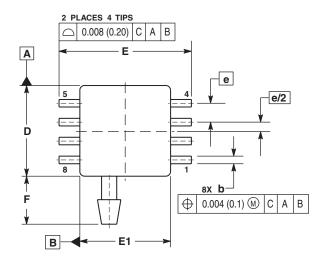


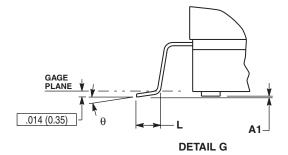


NOTES:

- ES: 1. CONTROLLING DIMENSION: INCH. 2. INTERPRET DIMENSIONS AND TOLERANCES PER
- INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994.
  DIMENSIONS "D" AND "E1" DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.006 (0.152)

PER SIDE. 4. DIMENSION "b" DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.008 (0.203) MAXIMUM.

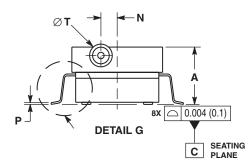



	INCHES		MILLIN	IETERS
DIM	MIN	MAX	MIN	MAX
Α	0.300	0.330	7.11	7.62
A1	0.002	0.010	0.05	0.25
b	0.038	0.042	0.96	1.07
D	0.465	0.485	11.81	12.32
E	0.717	BSC	18.21	BSC
E1	0.465	0.485	11.81	12.32
е	0.100	BSC	2.54 BSC	
F	0.245	0.255	6.22	6.47
K	0.120	0.130	3.05	3.30
L	0.061	0.071	1.55	1.80
Μ	0.270	0.290	6.86	7.36
Ν	0.080	0.090	2.03	2.28
Р	0.009	0.011	0.23	0.28
Т	0.115	0.125	2.92	3.17
θ	0°	7°	0°	7°

CASE 1369-01 ISSUE O SMALL OUTLINE PACKAGE

#### How to Reach Us:

Home Page: www.freescale.com

Web Support: http://www.freescale.com/support

#### USA/Europe or Locations Not Listed:

Freescale Semiconductor, Inc. Technical Information Center, EL516 2100 East Elliot Road Tempe, Arizona 85284 1-800-521-6274 or +1-480-768-2130 www.freescale.com/support

#### Europe, Middle East, and Africa:

Freescale Halbleiter Deutschland GmbH Technical Information Center Schatzbogen 7 81829 Muenchen, Germany +44 1296 380 456 (English) +46 8 52200080 (English) +49 89 92103 559 (German) +33 1 69 35 48 48 (French) www.freescale.com/support

#### Japan:

Freescale Semiconductor Japan Ltd. Headquarters ARCO Tower 15F 1-8-1, Shimo-Meguro, Meguro-ku, Tokyo 153-0064 Japan 0120 191014 or +81 3 5437 9125 support.japan@freescale.com

#### Asia/Pacific:

Freescale Semiconductor China Ltd. Exchange Building 23F No. 118 Jianguo Road Chaoyang District Beijing 100022 China +86 010 5879 8000 support.asia@freescale.com

#### For Literature Requests Only:

Freescale Semiconductor Literature Distribution Center P.O. Box 5405 Denver, Colorado 80217 1-800-441-2447 or +1-303-675-2140 Fax: +1-303-675-2150 LDCForFreescaleSemiconductor@hibbertgroup.com Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale<sup>™</sup> and the Freescale logo are trademarks of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners. © Freescale Semiconductor, Inc. 2009. All rights reserved.

