

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







# Technical Data Sheet Rosenberger MU Magnetic Micro B Adapter MU1S199-K01L-Y

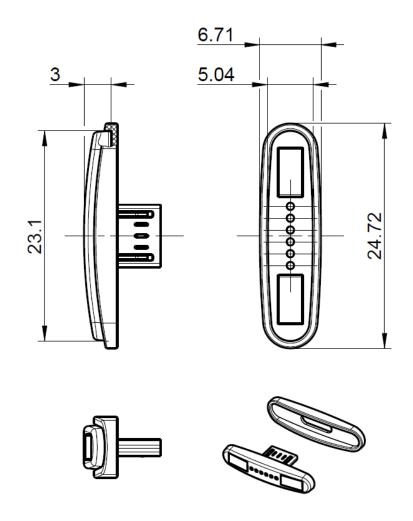

All dimensions are in mm; tolerances according to ISO 2768 m-H

## **General Information**

Magnetic Micro B Adapter with magnetic interface for Magnetic Micro B cable assembly

## **Available Colour**

| Description    | Colour "Y" in              |  |  |
|----------------|----------------------------|--|--|
| MU1S199-K01L-Y | A- white, similar RAL 9010 |  |  |
|                | B- black, similar RAL 9005 |  |  |

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel. : +49 8684 18-0 Email : <u>info@rosenberger.de</u> Page

1/3

# Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co.

# F\_35/09.14/6.2

## Technical Data Sheet Rosenberger Mu Magnetic Micro Mu1S199-K01L-Y

## Material and Plating

Micro B Adapter Plating/ Colour Material see colour table Housing PC+ABS Magnets NdFeB Nickel plated Gold contacts Brass Gold plated **PCB** FR4 see colour table Silicone cover Silicone

**B** Adapter

## Connectors

Micro B Plug USB Micro B acc. to USB 2.0 On-The-Go Specification

## **Electrical Data**

Designed for USB 2.0 Specification 5 V DC, 0.5 A, 480 Mbit/s

Test voltage500 V DCInsulation resistance @500V≥ 100 MΩContact resistancetypically ≤ 50 mΩ

## **Mechanical Data**

Disengagement force magnetic interface 6- 11 N
Disengagement force Micro B plug 11- 16 N

Mating cycles magnetic interface with load acc. to USB 2.0 min. 10.000

## **Environmental Data**

Temperature range -20 °C to +50 °C

Magnets start losing their magnetic properties above 65 °C

Tel. : +49 8684 18-0

Email: info@rosenberger.de

| Technical Data Sheet |                             | Rosenberger    |  |  |
|----------------------|-----------------------------|----------------|--|--|
| MU                   | Magnetic Micro<br>B Adapter | MU1S199-K01L-Y |  |  |

Compliance

RoHS compliant

**Packing** 

Standard 200 pcs per blister Weight Depending on tbd

## Caution!

Magnets can impact the function of pace makers and implantable cardioverter-defibrillators (e.g. actuation of reed switch). Keep a minimum distance of 0.2 m (20 cm) between the magnetic connector and the implanted devices to prevent malfunction and danger to health.

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

| Draft             | Date     | Approved      | Date     | Rev. | Engineering change number | Name       | Date     |
|-------------------|----------|---------------|----------|------|---------------------------|------------|----------|
| M. Portenkirchner | 23.03.16 | C. Kainzmaier | 06.06.18 | 400  | 18-0003                   | M. Margadt | 06.06.18 |

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel. : +49 8684 18-0 Email : info@rosenberger.de Page 3 / 3