

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









### Is Now Part of



## ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <a href="https://www.onsemi.com">www.onsemi.com</a>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo



October 1995 Revised August 2004

## NC7S02

## TinyLogic® HS 2-Input NOR Gate

### **General Description**

The NC7S02 is a single 2-Input high performance CMOS NOR Gate. Advanced Silicon Gate CMOS fabrication assures high speed and low power circuit operation over a broad  $V_{CC}$  range. ESD protection diodes inherently guard both inputs and output with respect to the  $V_{CC}$  and GND rails. Three stages of gain between inputs and outputs assures high noise immunity and reduced sensitivity to input edge rate.

### **Features**

- Space saving SOT23 or SC70 5-lead packages
- Ultra small MicroPak™ leadless package
- High Speed; t<sub>PD</sub> 3.5 ns typ
- Low Quiescent Power;  $I_{CC} < 1 \mu A$
- $\blacksquare$  Balanced Output Drive; 2 mA I $_{\rm OL}$ , –2 mA I $_{\rm OH}$
- Broad V<sub>CC</sub> Operating Range; 2V–6V
- Balanced Propagation Delays
- Specified for 3V operation

## **Ordering Code:**

Order Number	er Package Product Code Number Top Mark		Package Description	Supplied As		
NC7S02M5X	MA05B	7S02	5-Lead SOT23, JEDEC MO-178, 1.6mm	3k Units on Tape and Reel		
NC7S02P5X	MAA05A	S02	5-Lead SC70, EIAJ SC-88a, 1.25mm Wide	3k Units on Tape and Reel		
NC7S02L6X	MAC06A	E4	6-Lead MicroPak, 1.0mm Wide	5k Units on Tape and Reel		

## **Logic Symbol**



### **Pin Descriptions**

Pin Names	Description			
A, B	Inputs			
Y	Output			
NC	No Connect			


### **Function Table**

 $Y = \overline{A + B}$ 

H = HIGH Logic Level L = LOW Logic Level

 $\label{eq:total_cond} \mbox{TinyLogic@ is a registered trademark of Fairchild Semiconductor Corporation.} \\ \mbox{MicroPak}^{\mbox{\tiny TM}} \mbox{ is a trademark of Fairchild Semiconductor Corporation.} \\$ 


## **Connection Diagrams**



Pin Assignments for SOT23 and SC70

(Top View)

### Pad Assignments for MicroPak



(Top Through View)

### **Absolute Maximum Ratings**(Note 1)

 $\label{eq:supply Voltage VCC} \begin{array}{lll} \text{Supply Voltage (V}_{CC}) & -0.5\text{V to } +7.0\text{V} \\ \\ \text{DC Input Diode Current (I}_{IK}) & & & \\ @\ V_{IN} \leq -0.5\text{V} & -20\ \text{mA} \\ \\ @\ V_{IN} \geq V_{CC} +0.5\text{V} & +20\ \text{mA} \\ \\ \text{DC Input Voltage (V}_{IN}) & -0.5\text{V to } V_{CC} +0.5\text{V} \end{array}$ 

DC Output Diode Current (I<sub>OK</sub>)

DC Output Source

or Sink Current ( $I_{OUT}$ )  $\pm 12.5 \text{ mA}$ 

DC V<sub>CC</sub> or Ground Current

per Output Pin ( $I_{CC}$  or  $I_{GND}$ )  $\pm 25$  mA Storage Temperature ( $T_{STG}$ )  $-65^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$ 

Junction Temperature (T<sub>J</sub>)

Lead Temperature  $(T_L)$ 

(Soldering, 10 seconds) 260°C

Power Dissipation (PD) @ +85°C

SOT23-5 200 mW SC70-5 150 mW

# Recommended Operating Conditions (Note 2)

Supply Voltage ( $V_{CC}$ ) 2.0V to 6.0V Input Voltage (V<sub>IN</sub>) 0V to V<sub>CC</sub> Output Voltage (V<sub>OUT</sub>) 0V to V<sub>CC</sub> Operating Temperature (T<sub>A</sub>)  $-40^{\circ}C$  to  $+85^{\circ}C$ Input Rise and Fall Time (t<sub>r</sub>, t<sub>f</sub>) V<sub>CC</sub> @ 2.0V 0 to 1000 ns V<sub>CC</sub> @ 3.0V 0 to 750 ns V<sub>CC</sub> @ 4.5V 0 to 500 ns V<sub>CC</sub> @ 6.0V 0 to 400 ns

Thermal Resistance  $(\theta_{JA})$ 

SOT23-5

150°C

SC70-5 425°C/W

300°C/W

Note 1: Absolute maximum ratings are those values beyond which damage to the device may occur. The databook specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Fairchild does not recommend operation of circuits outside databook specifications.

Note 2: Unused inputs must be held HIGH or LOW. They may not float.

### **DC Electrical Characteristics**


Symbol	Parameter	v <sub>cc</sub>	V <sub>CC</sub>		$T_A = -40^{\circ}C$ to $+85^{\circ}C$		Units	Conditions	
Cyllibol		(V)	Min	Тур	Max	Min	Max	Ullits	Conditions
V <sub>IH</sub>	HIGH Level Input Voltage	2.0	1.50			1.50		V	
		3.0-6.0	0.7 V <sub>CC</sub>			0.7 V <sub>CC</sub>		V	
V <sub>IL</sub>	LOW Level Input Voltage	2.0			0.50		0.50	V	
		3.0-6.0			$0.3  V_{CC}$		$0.3  V_{\rm CC}$	v	
V <sub>OH</sub>	HIGH Level Output Voltage	2.0	1.90	2.0		1.90			
		3.0	2.90	3.0		2.90		V	$I_{OH} = -20 \mu A$
		4.5	4.40	4.5		4.40		•	$V_{IN} = V_{IL}$
		6.0	5.90	6.0		5.90			
									$V_{IN} = V_{IL}$
		3.0	2.68	2.85		2.63		V	$I_{OH} = -1.3 \text{ mA}$
		4.5	4.18	4.35		4.13		•	$I_{OH} = -2 \text{ mA}$
		6.0	5.68	5.85		5.63			$I_{OH} = -2.6 \text{ mA}$
V <sub>OL</sub>	LOW Level Output Voltage	2.0		0.0	0.10		0.10		
		3.0		0.0	0.10		0.10	V	$I_{OL} = 20 \mu A$
		4.5		0.0	0.10		0.10	•	$V_{IN} = V_{IH}$
		6.0		0.0	0.10		0.10		
									$V_{IN} = V_{IH}$
		3.0		0.1	0.26		0.33	V	$I_{OL} = 1.3 \text{ mA}$
		4.5		0.1	0.26		0.33	•	$I_{OL} = 2 \text{ mA}$
		6.0		0.1	0.26		0.33		$I_{OL} = 2.6 \text{ mA}$
I <sub>IN</sub>	Input Leakage Current	6.0			±0.1		±1.0	μΑ	$V_{IN} = V_{CC}$ , GND
I <sub>CC</sub>	Quiescent Supply Current	6.0			1.0		10.0	μΑ	$V_{IN} = V_{CC}$ , GND

## **AC Electrical Characteristics**

Symbol	Parameter	v <sub>cc</sub>	T <sub>A</sub> = +25°C		$T_A = -40^{\circ}C \text{ to } +85^{\circ}C$		Units	Conditions	Figure	
		(V)	Min	Тур	Max	Min	Max	Onits	Conditions	Number
t <sub>PLH</sub> ,	Propagation Delay	5.0		3.5	15			ns	$C_L = 15 pF$	
$t_{PHL}$		2.0		19	100		125			
		3.0		10.5	27		35		C 50 F	Figures 1, 3
		4.5		7.5	20		25	ns	$C_L = 50 pF$	
		6.0		6.5	17		21			
t <sub>TLH</sub> ,	Output Transition Time	5.0		3	10			ns	$C_L = 15  pF$	
$t_{THL}$		2.0		25	125		155			l <u>.</u> .
		3.0		16	35		45	ns	$C_1 = 50 \text{ pF}$	Figures 1, 3
		4.5		11	25		31	115	OL = 50 pr	., 0
		6.0		9	21		26			
C <sub>IN</sub>	Input Capacitance	Open		2	10		10	pF		
C <sub>PD</sub>	Power Dissipation Capacitance	5.0		6				pF	(Note 3)	Figure 2

Note 3: C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I<sub>CCD</sub>) at no output loading and operating at 50% duty cycle. (See Figure 2.) C<sub>PD</sub> is related to I<sub>CCD</sub> dynamic operating current by the expression:  $I_{CCD} = (C_{PD})(V_{CC})(f_{|N}) + (I_{CC}static).$ 


## **AC Loading and Waveforms**



 $\mathbf{C}_{\mathsf{L}}$  includes load and stray capacitance

Input PRR = 1.0 MHz;  $t_w = 500 \text{ ns}$ 

FIGURE 1. AC Test Circuit



Input = AC Waveform;

PRR = variable; Duty Cycle = 50%

FIGURE 2.  $I_{\rm CCD}$  Test Circuit





FIGURE 3. AC Waveforms


# Tape and Reel Specification TAPE FORMAT for SOT23 and SC70

Package	Таре	Number	Cavity	Cover Tape
Designator	Section	Cavities	Status	Status
	Leader (Start End)	125 (typ)	Empty	Sealed
M5X, P5X	Carrier	3000	Filled	Sealed
	Trailer (Hub End)	75 (typ)	Empty	Sealed

### TAPE DIMENSIONS inches (millimeters)

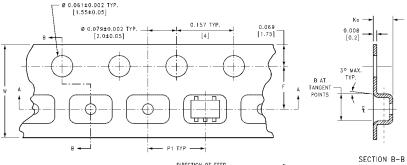






BEND RADIUS NOT TO SCALE

Package	Tape Size	DIM A	DIM B	DIM F	DIM K <sub>o</sub>	DIM P1	DIM W
SC70-5	8 mm	0.093	0.096	$0.138 \pm 0.004$	$0.053 \pm 0.004$	0.157	$0.315 \pm 0.004$
		(2.35)	(2.45)	$(3.5 \pm 0.10)$	$(1.35 \pm 0.10)$	(4)	$(8 \pm 0.1)$
SOT23-5	8 mm	0.130	0.130	$0.138 \pm 0.002$	$0.055 \pm 0.004$	0.157	$0.315 \pm 0.012$
		(3.3)	(3.3)	$(3.5 \pm 0.05)$	$(1.4 \pm 0.11)$	(4)	$(8 \pm 0.3)$

#### Tape and Reel Specification (Continued) TAPE FORMAT for MicroPak Tape Package Number Cavity Cover Tape Designator Status Section Cavities Status Leader (Start End) 125 (typ) Empty Sealed L6X 5000 Filled Sealed Trailer (Hub End) 75 (typ) Empty Sealed 1.75±0.10 8.00 <sup>+0.30</sup> -0.10 3.50±0.05 1.15±0.05 0 В -ø 0.50 ±0.05 SECTION B-B DIRECTION OF FEED SCALE:10X 0.254±0.020 ┌ 0.70±0.05 1.60±0.05 SECTION A-A SCALE:10X **REEL DIMENSIONS** inches (millimeters) TAPE SLOT DETAIL X **DETAIL X** SCALE: 3X Tape Α В С D N W1 W2 W3 Size 7.0 0.059 0.512 0.795 2.165 0.331 + 0.059/-0.000 0.567 W1 + 0.078/-0.039 8 mm (177.8)(1.50)(13.00)(20.20)(55.00)(8.40 + 1.50 / -0.00)(14.40)(W1 + 2.00/-1.00)

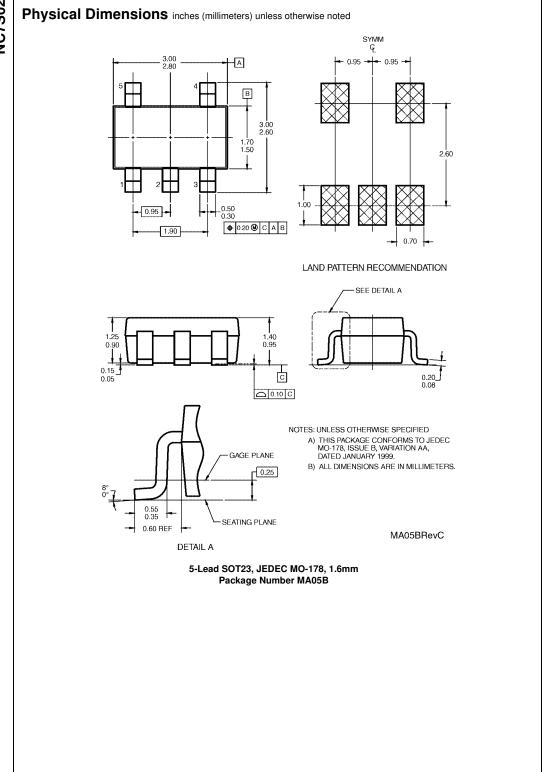

## Physical Dimensions inches (millimeters) unless otherwise noted (Continued) 2.00±0.20 0.65 1.9 B: 1.25±0.10 2.10±0.10 0.4 min -0.20 <sup>+0.10</sup> -0.05 0.25 LAND PATTERN RECOMMENDATION ♦ max 0.1 **⊗** SEE DETAIL A 0.9±.10 0.95±0.15 max 0.1 R0.14 GAGE PLANE R0.10 0.20 0.45 0.10 - 0.425 NOMINAL DETAIL A


NOTES:

A. CONFORMS TO EIAJ REGISTERED OUTLINE DRAWING SC88A.
B. DIMENSIONS DO NOT INCLUDE BURRS OR MOLD FLASH.
C. DIMENSIONS ARE IN MILLIMETERS.

MAA05ARevC

5-Lead SC70, EIAJ SC-88a, 1.25mm Wide Package Number MAA05A

### Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

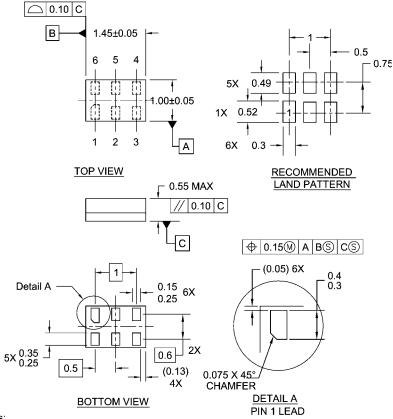

### Notes:

- 1. JEDEC PACKAGE REGISTRATION IS ANTICIPATED
- 2. DIMENSIONS ARE IN MILLIMETERS
- 3. DRAWING CONFORMS TO ASME Y14.5M-1994

MAC06ARevB

6-Lead MicroPak, 1.0mm Wide Package Number MAC06A

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="https://www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor nessure any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, a

### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative