# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



### 2-INPUT 1-OUTPUT AUDIO SWITCH

#### ■ GENERAL DESCRIPTION

The NJM2520 is  $58k\Omega$  input impedance 2-input 1-output audio switch.

It contains two bias-type inputs and one buffer-type output.

#### ■ FEATURES


- Operating Voltage
- Crosstalk
- (-70dB typ.) Input Impedance (58kΩ typ.)
- 2-Input,1-Output
- Bipolar Technology
- Package Outline



(+4.75V~+13V)

#### ■ PIN CONFIGURATION



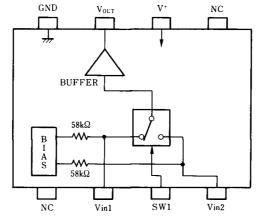

NJM2520D NJM2520M NJM2520V

■ PACKAGE OUTLINE





NJM2520D

NJM2520M





**PIN FUNCTION** 

NC

Vin1

SW1

Vin2

NC V⁺

Vout

GND

1.

2. 3.

4.

5.

6.

7.

8.

#### ■ ABSOLUTE MAXIMUM RATINGS

			( Ta=25°C )
PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sup>+</sup>	+15	V
Power Dissipation	PD	( DIP8 ) 500 ( DMP8 ) 300 ( SSOP8 ) 250	mW
Operating Temperature Range	T <sub>opr</sub>	-20~+75	°C
Storage Temperature Range	T <sub>stg</sub>	-40~+125	C

#### ■ ELECTRICAL CHARACTERISTICS


					( √⁺=5∖	(,Ta=25°C )
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V*		+4.7	-	+13.0	V
Operating Current	Icc		-	8.5	11.0	mA
Frequency Characteristics	G <sub>f</sub>	V <sub>IN</sub> =2V <sub>P-P</sub> ,V <sub>O</sub> =10MHz / 100kHz	-1.0	0	+1.0	dB
Voltage Gain	Gv	V <sub>IN</sub> =2V <sub>P-P</sub> ,100kHz	-0.5	0	+0.5	dB
Total Harmonic Distortion	THD	V <sub>IN</sub> =2.5V <sub>P-P</sub> ,1kHz	-	0.01	-	%
Output Offset Voltage	V <sub>off</sub>		-35	0	+35	mV
Switching Voltage	V <sub>CH</sub>		2.4	-	-	V
	V <sub>CL</sub>		-	-	0.8	V
Input Impedance	R		-	58	-	kΩ
Output Impedance	Ro		-	10	-	Ω

#### ■ CONTROL SIGNAL-OUTPUT SIGNAL


SW1	OUTPUT SIGNAL		
L	V <sub>IN</sub> 1		
Н	V <sub>IN</sub> 2		

#### ■ APPLICATION

Oscillation Prevention on light loading conditions Recommended under circuit

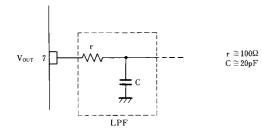

#### ■ TEST CIRCUIT

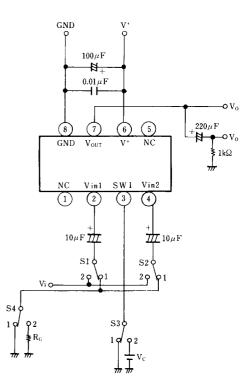

#### [CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circults in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right induding the industrial rights.

## New Japan Radio Co., Ltd.