

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Dual SPST Analog Switch, Low Voltage, Single Supply

The NLAS324 is a dual SPST (Single Pole, Single Throw) switch, similar to 1/2 a standard 4066. The device permits the independent selection of 2 analog/digital signals. Available in the Ultra-Small 8 package.

The use of advanced 0.6 μ CMOS process, improves the R_{ON} resistance considerably compared to older higher voltage technologies.

Features

- On Resistance is 20 Ω Typical at 5.0 V
- Matching is $< \Omega$ Between Sections
- 2 6 V Operating Range
- Ultra Low < 5 pC Charge Injection
- Ultra Low Leakage < 1 nA at 5.0 V, 25°C
- Wide Bandwidth > 200 MHz, -3 dB
- 2000 V ESD (HBM)
- Ron Flatness \pm 6 Ω at 5.0 V
- Negative Enable
- Switches are Independent
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant




Figure 1. Pinout




ON Semiconductor®

www.onsemi.com



US8 US SUFFIX CASE 493



MARKING

A7 = Device Code
M = Date Code
Pb-Free Package

(Note: Microdot may be in either location)

PIN ASSIGNMENT

NC1
COM1
IN2
GND
NC2
COM2
IN1
V _{CC}

FUNCTION TABLE

On/Off Enable Input	State of Analog Switch
L	On
Н	Off

ORDERING INFORMATION

Device	Package	Shipping [†]
NLAS324USG	US8 (Pb-Free)	3,000 / Tape & Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V _{CC}	DC Supply Voltage	-0.5 to +7.0	V
V _I	DC Input Voltage	-0.5 to +7.0	V
Vo	DC Output Voltage	-0.5 to +7.0	V
I _{IK}	DC Input Diode Current V _I < GND	-50	mA
I _{OK}	DC Output Diode Current V _O < GND	-50	mA
I _O	DC Output Sink Current	±50	mA
I _{CC}	DC Supply Current per Supply Pin	±100	mA
I _{GND}	DC Ground Current per Ground Pin	±100	mA
T _{STG}	Storage Temperature Range	-65 to +150	°C
TL	Lead Temperature, 1 mm from Case for 10 Seconds	260	°C
TJ	Junction Temperature under Bias	+ 150	°C
$\theta_{\sf JA}$	Thermal Resistance (Note 1)	250	°C/W
P_{D}	Power Dissipation in Still Air at 85°C	250	mW
MSL	Moisture Sensitivity	Level 1	
F _R	Flammability Rating Oxygen Index: 28 to 34	UL 94 V-0 @ 0.125 in	
V _{ESD}	ESD Withstand Voltage Human Body Model (Note 2) Machine Model (Note 3) Charged Device Model (Note 4)	> 2000 > 150 N/A	V

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 1. Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2-ounce copper trace with no air flow.
- 2. Tested to EIA/JESD22-A114-A.
- 3. Tested to EIA/JESD22-A115-A.
- 4. Tested to JESD22-C101-A.

RECOMMENDED OPERATING CONDITIONS

Symbol	Characteristics	Min	Max	Unit
V _{CC}	Positive DC Supply Voltage	2.0	5.5	V
V _{IN}	Digital Input Voltage (Enable)	GND	5.5	V
V _{IO}	Static or Dynamic Voltage Across an Off Switch	GND	V _{CC}	V
V_{IS}	Analog Input Voltage (NO, COM)	GND	V _{CC}	V
T _A	Operating Temperature Range, All Package Types	-55	+125	°C
t _r , t _f	Input Rise or Fall Time, $V_{cc} = 3.3 \text{ V} \pm 0.3 \text{ V}$ (Enable Input) $V_{cc} = 5.0 \text{ V} \pm 0.5 \text{ V}$	0	100 20	ns/V

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

DEVICE JUNCTION TEMPERATURE VERSUS TIME TO 0.1% BOND FAILURES

Junction Temperature °C	Time, Hours	Time, Years
80	1,032,200	117.8
90	419,300	47.9
100	178,700	20.4
110	79,600	9.4
120	37,000	4.2
130	17,800	2.0
140	8,900	1.0




Figure 2. Failure Rate vs. Time Junction Temperature

DC CHARACTERISTICS – Digital Section (Voltages Referenced to GND)

				Guaran			
Symbol	Parameter	Condition	v _{cc}	-55 to 25°C	<85°C	<125°C	Unit
V _{IH}	Minimum High-Level Input Voltage, Enable Inputs		2.0 3.0 4.5 5.5	1.5 2.1 3.15 3.85	1.5 2.1 3.15 3.85	1.5 2.1 3.15 3.85	V
V _{IL}	Maximum Low-Level Input Voltage, Enable Inputs		2.0 3.0 4.5 5.5	0.5 0.9 1.35 1.65	0.5 0.9 1.35 1.65	0.5 0.9 1.35 1.65	V
I _{IN}	Maximum Input Leakage Current, Enable Inputs	V _{IN} = 5.5 V or GND	0 V to 5.5 V	<u>+</u> 0.1	<u>+</u> 1.0	<u>+</u> 1.0	μΑ
Icc	Maximum Quiescent Supply Current (per package)	Enable and $V_{IS} = V_{CC}$ or GND	5.5	1.0	1.0	2.0	μΑ

DC ELECTRICAL CHARACTERISTICS - Analog Section

				Guaranteed Max Limit			
Symbol	Parameter	Condition	V _{CC}	-55 to 25°C	<85°C	<125°C	Unit
R _{ON}	Maximum ON Resistance (Figures 8 – 12)	$ \begin{aligned} &V_{IN} = V_{IH} \\ &V_{IS} = V_{CC} \text{ to GND} \\ &I_{IS}I = \leq 10.0 \text{mA} \end{aligned} $	3.0 4.5 5.5	45 30 25	50 35 30	55 40 35	Ω
R _{FLAT(ON)}	ON Resistance Flatness	$\begin{aligned} &V_{IN} = V_{IH} \\ &I_{IS}I = \leq &10.0 mA \\ &V_{IS} = 1V, 2V, 3.5V \end{aligned}$	4.5	4	4	5	Ω
I _{NO(OFF)}	Off Leakage Current, Pin 2 (Figure 3)	$ \begin{array}{c} V_{IN} = V_{IL} \\ V_{NO} = 1.0 \text{ V}, V_{COM} = 4.5 \text{ V or} \\ V_{COM} = 1.0 \text{ V and } V_{NO} \text{ 4.5 V} \end{array} $	5.5	1	10	100	nA
I _{COM(OFF)}	Off Leakage Current, Pin 1 (Figure 3)	$V_{IN} = V_{IL}$ $V_{NO} = 4.5 \text{ V or } 1.0 \text{ V}$ $V_{COM} = 1.0 \text{ V or } 4.5 \text{ V}$	5.5	1	10	100	nA

AC ELECTRICAL CHARACTERISTICS (Input t_r = t_f = 3.0 ns)

					Guaranteed Max Limit								
			V _{CC}	-5	55 to 2	5°C		<85°C	;		<125°(С	
Symbol	Parameter	Test Conditions	(V)	Min	Тур	Max	Min	Тур	Max	Min	Тур	Max	Unit
t _{ON}	Turn-On Time	$R_L = 300 \ \Omega, \ C_L = 35 \ pF$ (Figures 4, 5, and 13)	2.03.04.55.5		7.0 5.0 4.5 4.5	14 10 9 9			16 12 11 11			16 12 11 11	ns
t _{OFF}	Turn-Off Time	$R_L = 300 \Omega$, $C_L = 35 pF$ (Figures 4, 5, and 13)	2.03.04.5 5.5		11.0 7.0 5.0 5.0	22 14 10 10			24 16 12 12			24 16 12 12	ns

		Typical @ 25, V _{CC} = 5.0 V	
C _{IN}	Maximum Input Capacitance, Select Input	8	pF
C _{NO or} C _{NC}	Analog I/O (switch off)	10	
C _{COM(OFF)}	Common I/O (switch off)	10	
C _{COM(ON)}	Feedthrough (switch on)	20	

ADDITIONAL APPLICATION CHARACTERISTICS (Voltages Referenced to GND Unless Noted)

			V _{CC}	Limit	
Symbol	Parameter	Condition	٧	25°C	Unit
BW	Maximum On–Channel –3dB Bandwidth or Minimum Frequency Response	V_{IS} = 0 dBm V_{IS} centered between V_{CC} and GND (Figures 6 and 14)	3.0 4.5 5.5	190 200 220	MHz
V _{ONL}	Maximum Feedthrough On Loss	V _{IS} = 0 dBm @ 10 kHz V _{IS} centered between V _{CC} and GND (Figure 6)	3.0 4.5 5.5	-2 -2 -2	dB
V _{ISO}	Off-Channel Isolation	$f = 100 \text{ kHz}$; $V_{IS} = 1 \text{ V RMS}$ V_{IS} centered between V_{CC} and GND (Figures 6 and 15)	3.0 4.5 5.5	-93	dB
Q	Charge Injection Enable Input to Common I/O	$\begin{aligned} &V_{IS} = V_{CC\ to}\ \text{GND},\ F_{IS} = 20\ \text{kHz} \\ &t_r = t_f = 3\ \text{ns} \\ &R_{IS} = 0\ \Omega,\ C_L = 1000\ \text{pF} \\ &Q = C_L \ ^* \Delta V_{OUT}\ \text{(Figures 7 and 16)} \end{aligned}$	3.0 5.5	1.5 3.0	pC
THD	Total Harmonic Distortion THD + Noise	F_{IS} = 20 Hz to 1 MHz, R_L = Rgen = 600 Ω , C_L = 50 pF V_{IS} = 3.0 V_{PP} sine wave V_{IS} = 5.0 V_{PP} sine wave (Figure 17)	3.3 5.5	0.3 0.15	%

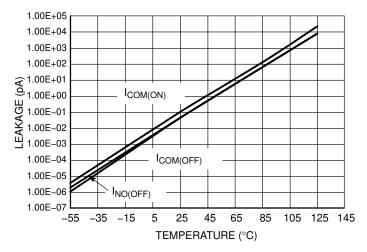


Figure 3. Switch Leakage vs. Temperature

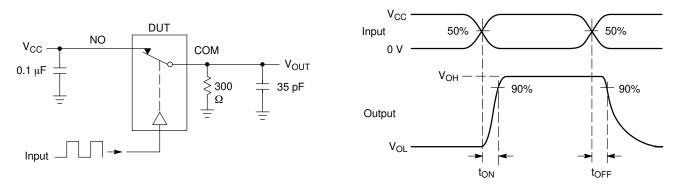



Figure 4. t_{ON}/t_{OFF}







Figure 5. t_{ON}/t_{OFF}



Channel switch control/s test socket is normalized. Off isolation is measured across an off channel. On loss is the bandwidth of an On switch. $V_{\rm ISO}$, Bandwidth and $V_{\rm ONL}$ are independent of the input signal direction.

$$V_{ISO} = Off Channel Isolation = 20 Log \left(\frac{V_{OUT}}{V_{IN}}\right) V_{IN}$$
 at 100 kHz

$$V_{ONL}$$
 = On Channel Loss = 20 Log $\left(\frac{V_{OUT}}{V_{IN}}\right)V_{IN}$ at 100 kHz to 50 MHz

Bandwidth (BW) = the frequency 3 dB below V_{ONL}

Figure 6. Off Channel Isolation/On Channel Loss (BW)/Crosstalk (On Channel to Off Channel)/V_{ONL}

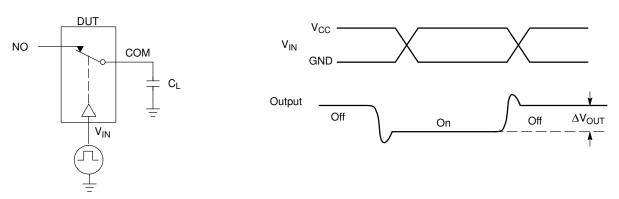


Figure 7. Charge Injection: (Q)




Figure 8. R_{ON} vs. V_{COM} and V_{CC} (@25°C)




Figure 9. R_{ON} vs. V_{COM} and Temperature, V_{CC} = 2.0 V




Figure 10. R_{ON} vs. V_{COM} and Temperature, V_{CC} = 2.5 V




Figure 11. $R_{\mbox{\scriptsize ON}}$ vs. $V_{\mbox{\scriptsize COM}}$ and Temperature, $V_{\mbox{\scriptsize CC}} = 3.0~\mbox{\scriptsize V}$




Figure 12. R_{ON} vs. V_{COM} and Temperature, V_{CC} = 4.5 V






Figure 13. Switching Time vs. Supply Voltage, T = 25°C

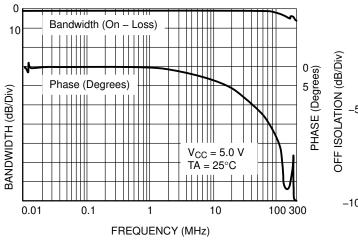


0 NOI NOI -50 NOI -50 -100 0.01 0.1 1 10 100 300 FREQUENCY (MHz)

Figure 14. ON Channel Bandwidth and Phase Shift Over Frequency

Figure 15. Off Channel Isolation









Figure 17. THD vs. Frequency

PACKAGE DIMENSIONS

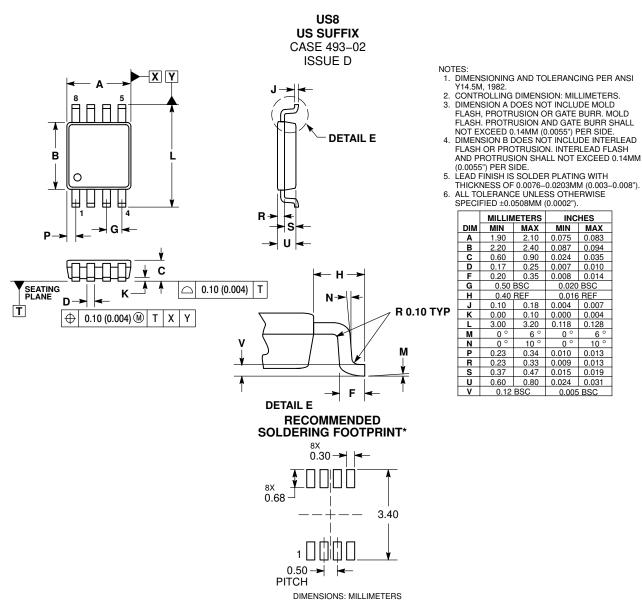

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and the unarregistered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA **Phone**: 303–675–2175 or 800–344–3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

10

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative