

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China













Features


- Input range 180~264VAC
- · Class II power unit, no FG
- · Built-in active PFC function
- · High efficiency up to 90.5%
- No load power consumption <0.15W
- · Energy efficiency Level VI
- · Comply with EU ErP
- Compliance to IEC/EN 61558-1,-2-16 and IEC/EN 60335-1 (except for OWA-120E-48,54) for household appliance
- · Fanless design, cooling by free air convection
- Protections: Short circuit / Overload / Over voltage / Over temperature
- 5 years warranty

Description

OWA-120E is a 120W AC/DC, class II (no FG) external power supply series pinpointing the moistureproof feature. The fully-potted silicone inside the plastic enclosure enhances the heat dissipation; it also benefits that the power body of OWA-120E achieves IP67 level so that this series specializes the application in which the damp, humidity or dust resistance is needed for the external power supply. OWA-120E follows the latest energy efficiency demand with the no load power consumption less than 0.15W. It is certified with EN61558-2-16; moreover, the compliance to EN60335-1 for selected models can greatly simplify the system design such as household appliances.

OWA-120E adopts the input range from 180VAC to 264VAC and incorporates a built-in PFC function. With the working efficiency up to 90.5%, OWA-120E is cooled by free air convection; the working temperature ranges from -40 $^{\circ}$ C to +70 $^{\circ}$ C.

Model Encoding

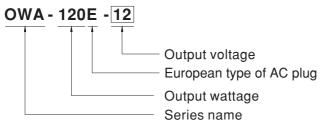

Applications

- · Robotic lawn mower
- · Household appliance
- · Battery charging
- General electronic products in dusty or humid environment




SPECIFICATION

| MODEL | | OWA-120E-12 | OWA-120E-15 | OWA-120E-20 | OWA-120E-24 | OWA-120E-30 | OWA-120E-36 | OWA-120E-42 | OWA-120E-48 | OWA-120E-54 | | |
|--|---|--|--------------|-------------|-------------|-------------|------------------|-----------------|-------------------|-------------|--|--|
| ОИТРИТ | DC VOLTAGE | 12V | 15V | 20V | 24V | 30V | 36V | 42V | 48V | 54V | | |
| | RATED CURRENT | 9.6A | 8A | 6A | 5A | 4A | 3.4A | 2.9A | 2.5A | 2.3A | | |
| | RATED POWER | 115.2W | 120W | 120W | 120W | 120W | 122.4W | 121.8W | 120W | 124.2W | | |
| | RIPPLE & NOISE (max.) Note.2 | 150mVp-p | 150mVp-p | 150mVp-p | 150mVp-p | 200mVp-p | 200mVp-p | 250mVp-p | 250mVp-p | 350mVp-p | | |
| | VOLTAGE TOLERANCE Note.3 | ±4.0% | ±4.0% | ±4.0% | ±4.0% | ±3.0% | ±2.0% | ±1.0% | ±1.0% | ±1.0% | | |
| | LINE REGULATION | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | | |
| | LOAD REGULATION | ±2.0% | ±1.5% | ±1.0% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | | |
| | SETUP, RISE TIME Note.4 | 500ms, 80ms at 95% load 230VAC | | | | | | | | | | |
| | HOLD UP TIME (Typ.) | 16ms at full load 230VAC | | | | | | | | | | |
| INPUT | VOLTAGE RANGE | 180 ~ 264VAC 254 ~ 370VDC | | | | | | | | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | | | | | | | | |
| | POWER FACTOR (Typ.) | PF>0.96/230VAC at full load | | | | | | | | | | |
| | EFFICIENCY (Typ.) | 87.5% | 89% | 90% | 90.5% | 90% | 90% | 90.5% | 90.5% | 90.5% | | |
| | AC CURRENT (Typ.) | 0.65A / 230VAC | | | | | | | | | | |
| | INRUSH CURRENT (Typ.) | COLD START 60A(twidth=520µs measured at 50% lpeak) at 230VAC | | | | | | | | | | |
| | LEAKAGE CURRENT | <0.25mA / 240VAC | | | | | | | | | | |
| | OVERLOAD | 105 ~ 115% | | | | | | | | | | |
| | | Protection type: Hiccup mode, recovers automatically after fault condition is removed | | | | | | | | | | |
| PROTECTION | SHORT CIRCUIT | Hiccup mode, recovers automatically after fault condition is removed | | | | | | | | | | |
| | OVER VOLTAGE | 15 ~ 17V | 17.5 ~ 21V | 23 ~ 27V | 28 ~ 34V | 34 ~ 40V | 41 ~ 46V | 46 ~ 54V | 54 ~ 60V | 59 ~ 66V | | |
| | | Protection type : Shut down o/p voltage, re-power on to recover | | | | | | | | | | |
| | OVER TEMPERATURE | Shut down o/p voltage, re-power on to recover | | | | | | | | | | |
| ENVIRONMENT | WORKING TEMP. | -40 ~ +70°C (Refer to "Derating Curve") | | | | | | | | | | |
| | WORKING HUMIDITY | 20 ~ 95% RH non-condensing | | | | | | | | | | |
| | STORAGE TEMP., HUMIDITY | -40 ~ +80°C, 10 ~ 95% RH | | | | | | | | | | |
| | TEMP. COEFFICIENT | ±0.03%/°C (0~40°C) | | | | | | | | | | |
| | VIBRATION | 10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes | | | | | | | | | | |
| | SAFETY STANDARDS | DEKRA EN61558-1,-2-16; DEKRA EN60335-1 (except for OWA-120E-48,54); EAC TP TC 004,IP67 (for power body) approved | | | | | | | | | | |
| SAFETY & EMC | WITHSTAND VOLTAGE | I/P-O/P:3.75KVAC | | | | | | | | | | |
| | ISOLATION RESISTANCE | I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH | | | | | | | | | | |
| | EMC EMISSION | Compliance to EN55032 (CISPR32) Class B, EN55014-1, EN61000-3-2,-3;EAC TP TC 020 | | | | | | | | | | |
| EMC IMMUNITY Compliance to EN61000-4-2,3,4,5,6,8,11, EN55014-2, EN55024, light ind | | | | | | | ndustry level (s | urge L- N : 2K\ | /), criteria A;EA | C TP TC 020 | | |
| OTHERS | MTBF | 294.3K hrs min. MIL-HDBK-217F (25°C) | | | | | | | | | | |
| | DIMENSION | 191*63*37.5mm | | | | | | | | | | |
| | PACKING | 1.15Kg; 12p | cs/14.8Kg/0. | 89CUFT | | | | | | | | |
| NOTE | 2. Ripple & noise are medicapacitor.3. Tolerance : includes se | All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. Tolerance: includes set up tolerance, line regulation and load regulation. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time. | | | | | | | | | | |




■ Block Diagram

PFC fosc: 50~120KHz PWM fosc: 60~130KHz

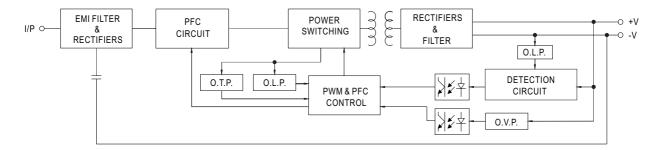

■ Derating Curve

■ Static Characteristics

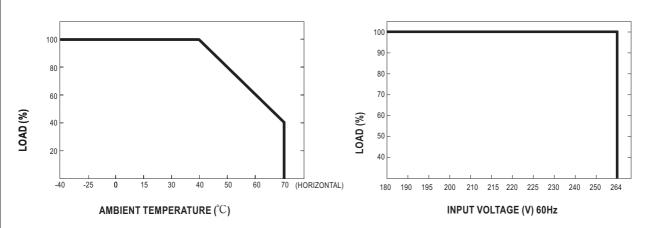




■ Mechanical Specification


Case No. PWM-120

Unit:mm

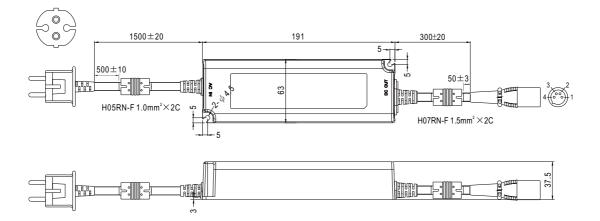

■ Input Plug Type

All standard models : CEE 7/7



■ Output Plug Assignment

| Model Category | Plug Description | Plug Picture | | PIN NO. | OUTPUT |
|--------------------|--------------------------------------|--------------|-----------------------|---------|---------|
| For standard model | XLR 4P, NEUTRIK NC4MX, | | 3 2 | 1,2 | +V |
| | or equivalent | | | 3,4 | -V |
| | Lumberg 3611 03, or equivalent | | 1 1 2 2 3 | 1 | +V |
| For optional model | | | | 2 | floated |
| | | | 2 | 3 | -V |
| For optional model | XLR 3P,NEUTRIK NC3MX, | | 3 0 0 1 | 1 | +V |
| Por optional model | or equivalent | | | 2,3 | -V |
| F | CHOGORI 22002411-01 or equivalent | | (0) (2) | 1 | +V |
| For optional model | | | | 2 | -V |
| | CHOGORI 23002411-01 or equivalent | | | 1 | +V |
| For optional model | | | | 2 | -V |
| - " | Unicable UT-D170F4-2P | | (a) | 1 | +V |
| For optional model | or equivalent | | | 2 | -V |
| | Unicable UT-D224-2P or equivalent | | 0 | 1 | +V |
| For optional model | | | | 2 | -V |
| | 2.1φ x 5.5φ x 11 mm, center +, | | (5) | | |
| For optional model | tuning fork type | | Inside | CENTER | +V |

[※] For details, please contact MEAN WELL.

■ Installation Manual

Please refer to: http://www.meanwell.com/manual.html