

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







4 Tumbler Snap-in Switchlocks



Features/Benefits

- Snap-in mounting
- Multi-pole and multi-position
- Positive detent

Typical Applications

- Computers
- Communication equipment

Models Available

Specifications

CONTACT RATING: Q contact material: 4 AMPS @ 125 V AC; 1 AMP @ 250 V AC (UL) See page L-20 for additional ratings. ELECTRICAL LIFE: 10,000 make-and-break cycles at full load.

CONTACT RESISTANCE: Below 10 m Ω typ. initial @

2-4 V DC, 100 mA for both silver and gold plated contacts. INSULATION RESISTANCE: $10^9~\Omega$ min.

INSULATION RESISTANCE: 10° \(\Omega \text{min.} \)

DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.

INDEXING: 45° or 90°, 2-3 positions.

Materials

SWITCH HOUSING & LOCK: One piece construction,

6/6 Nylon (UL 94V-2), black

4 disc tumbler mechanism.

KEYS: One nickel plated brass key and one key with insert molded plastic head.

TUMBLERS: Disc tumblers, brass.

CONTACTS & TERMINALS: Q contact material: Copper, silver plated. See page L-20 for additional contact materials.

NOTE: Any models supplied with Q or B contact material are RoHS compliant.

NOTE: Specifications and materials listed above are for switchlocks with standard options. For information on specific and custom switchlocks, consult Customer Service Center.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages L–19 and L–21. For additional options not shown in catalog, consult Customer Service Center.



Switch and Lock Function

P10113 SP, 90° Index, keypull pos. 1
P20113 DP, 90° Index, keypull pos. 1 & 2
P100AF SP, 45° Index, keypull pos. 1, 2 & 3
P200AF DP, 45° Index, keypull pos. 1, 2 & 3

P1011U SP, 90° Index, keypull pos. 1 & 2

Keying

- 2 Two nickel plated brass keys
- T One nickel plated brass key with insert molded plastic square head and one nickel plated brass key

Lock Type

Lock Finish

C 4 tumbler lock with detent

M Plastic lock with matte finish

Terminations

03 Solder lug WC Wire lead

Contact Material

Q Silver

G Gold over silver

Lock Color 2 Black

> Key Color 2 Black


NONE Nickel plated brass



Dimensions are shown: Inch (mm) Specifications and dimensions subject to change

SWITCH AND LOCK FUNCTION

		CONNECTED TERMINALS					
NO. POLES	MODEL NO.	POS. 1	POS. 2	POS. 3	KEY PULL POSITIONS	LOCK CONFIGURATION	INDEXING
SP DP	P10113 P20113	8-1 8-1, 4-5	1-3 1-3, 5-7		Position 1	POS. 1 POS. 2	90°
DP	P100AF P200AF	8-1 8-1, 4-5	1-2 1-2, 5-6	2-3 2-3, 6-7	Positions 1, 2 & 3	POS. 1 POS. 2 POS. 3	45°
SP	P1011U	8-1	1-3		Positions 1 & 2	POS. 1 POS. 2	90°




molded on housing

All models c with all options when ordered with 'Q' contact material.

LEGEND

- = Detent Positions (45° or 90°)
- Exercise = Key pull possible in these positions.
- Stop Positions

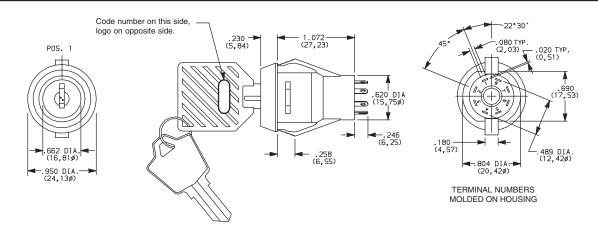


Part number shown: P100AFTCM03Q22

KEYING ----


OPTIC		CODE NO. ON KEY	CODE NO. ON LOCK
2	2 NICKEL PLATED BRASS KEYS	YES	NO
Т	1 NICKEL PLATED BRASS KEYS, WITH PLASTIC INSERT MOLDED SQUARE HEAD & 1 NICKEL PLATED BRASS KEY	YES	NO

NICKEL PLATED BRASS KEY



Key part number: 115140126

NICKEL PLATED BRASS KEY WITH PLASTIC INSERT MOLDED SQUARE HEAD



Key part number: 11599112602

NOTE: All orders keyed alike with code number on key. For more than one key code, replacement keys, or other special features, consult Customer Service Center.



Dimensions are shown: Inch (mm) Specifications and dimensions subject to change




www.ck-components.com

4 Tumbler Snap-in Switchlocks

LOCK TYPE

4 TUMBLER LOCK WITH DETENT




OPTION CODE	LOCK COLOR	
2	BLACK	

LOCK FINISH


PLASTIC LOCK WITH MATTE FINISH

TERMINATIONS ---

SOLDER LUG





WC WIRE LEAD



Black wire standard, other colors and lengths available, consult Customer Service Center. UL style 1015.

PC MOUNTING





Panel Thickness: .100-.200 (2,54-5,08)

CONTACT MATERIAL

OPTION CODE	RoHS COMPLIANT*	RoHS COMPATIBLE*	CONTACT AND TERMINAL MATERIAL	RATING	
Q	YES	YES	SILVER ²	POWER	4 AMPS @ 125 V AC; 1 AMP @ 250 V AC (UL/CSA)
G	YES	YES	GOLD OVER SILVER ³	LOW LEVEL/DRY CIRCUIT OR POWER	0.4 VA MAX. @ 20 V AC or DC MAX. or 4 AMPS @ 125 V AC; 1 AMP @ 250 V AC (UL/CSA)

^{*} Note: See Technical Data section of this catalog for RoHS compliant and compatible definitions and specifications.

 2 CONTACTS & TERMINALS: Copper, silver plated (standard with all termination options) 3 CONTACTS & TERMINALS: Copper, with gold plate over silver plate termination

All models cause with all options when ordered with 'Q' contact material.





P Series 4 Tumbler Snap-in Switchlocks

AVAILABLE HARDWARE



Key Code: A126 4 TUMBLER

PART NO. (ONE KEY)

115140126

Material: Brass Finish: Nickel plate



Key Code: A126 4 TUMBLER

PART NO. (ONE KEY)

1159112602 BLACK

Material: Brass Finish: Nickel plate 6/6 Nylon insert molded head





