imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ne<mark>x</mark>peria

Important notice

Dear Customer,

On 7 February 2017 the former NXP Standard Product business became a new company with the tradename **Nexperia**. Nexperia is an industry leading supplier of Discrete, Logic and PowerMOS semiconductors with its focus on the automotive, industrial, computing, consumer and wearable application markets

In data sheets and application notes which still contain NXP or Philips Semiconductors references, use the references to Nexperia, as shown below.

Instead of <u>http://www.nxp.com</u>, <u>http://www.philips.com/</u> or <u>http://www.semiconductors.philips.com/</u>, use <u>http://www.nexperia.com</u>

Instead of sales.addresses@www.nxp.com or sales.addresses@www.semiconductors.philips.com, use **salesaddresses@nexperia.com** (email)

Replace the copyright notice at the bottom of each page or elsewhere in the document, depending on the version, as shown below:

- © NXP N.V. (year). All rights reserved or © Koninklijke Philips Electronics N.V. (year). All rights reserved

Should be replaced with:


- © Nexperia B.V. (year). All rights reserved.

If you have any questions related to the data sheet, please contact our nearest sales office via e-mail or telephone (details via **salesaddresses@nexperia.com**). Thank you for your cooperation and understanding,

Kind regards,

Team Nexperia

DISCRETE SEMICONDUCTORS

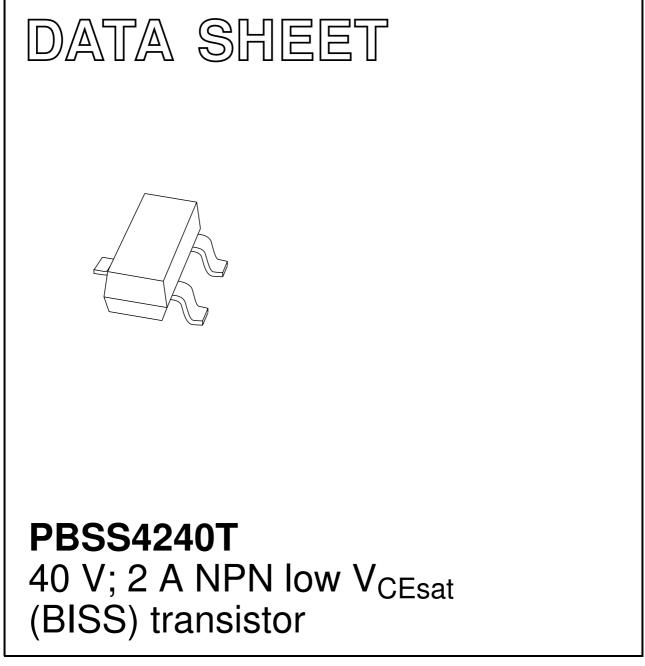

Product data sheet Supersedes data of 2001 Jul 13 2004 Jan 09



PBSS4240T

40 V; 2 A NPN low V_{CEsat} (BISS) transistor

FEATURES

- · Low collector-emitter saturation voltage
- High current capability
- Improved device reliability due to reduced heat generation
- Replacement for SOT89/SOT223 standard packaged transistors.

APPLICATIONS

- Supply line switching circuits
- Battery management applications
- DC/DC converter applications
- Strobe flash units
- Heavy duty battery powered equipment (motor and lamp drivers).

DESCRIPTION

NPN low V_{CEsat} transistor in a SOT23 plastic package. PNP complement: PBSS5240T.

MARKING

TYPE NUMBER	MARKING CODE ⁽¹⁾	
PBSS4240T	ZE*	

Note

- 1. * = p: Made in Hong Kong.
 - * = t: Made in Malaysia.
 - * = W: Made in China.

ORDERING INFORMATION

TYPE	PACKAGE		
NUMBER NAME DESCRIPTION		DESCRIPTION	VERSION
PBSS4240T	 plastic surface mounted package; 3 leads SC 		SOT23

QUICK REFERENCE DATA

SYMBOL	PARAMETER	MAX.	UNIT	
V _{CEO}	collector-emitter voltage	40	V	
I _{CM}	peak collector current	3	A	
R _{CEsat}	equivalent on-resistance	<200	mΩ	

PINNING

PIN	DESCRIPTION
1	base
2	emitter
3	collector

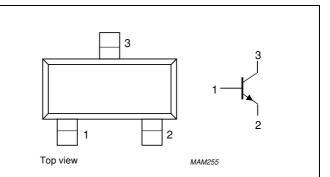


Fig.1 Simplified outline (SOT23) and symbol.

40 V; 2 A NPN low V_{CEsat} (BISS) transistor

PBSS4240T

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	_	40	V
V _{CEO}	collector-emitter voltage	open base	_	40	V
V _{EBO}	emitter-base voltage	open collector	_	5	V
I _C	collector current (DC)		_	2	Α
I _{CM}	peak collector current		_	3	Α
I _{BM}	peak base current		_	300	mA
P _{tot}	total power dissipation	$T_{amb} \le 25 \ ^{\circ}C$; note 1	_	300	mW
		$T_{amb} \le 25 \ ^{\circ}C$; note 2	_	480	mW
T _{stg}	storage temperature		-65	+150	°C
Tj	junction temperature		_	150	°C
T _{amb}	operating ambient temperature		-65	+150	°C

Notes

1. Device mounted on a printed-circuit board, single sided copper, tinplated and standard footprint.

2. Device mounted on a printed-circuit board, single sided copper, tinplated and mounting pad for collector 1 cm².

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
R _{th(j-a)}	thermal resistance from junction to	in free air; note 1	417	K/W
ambient		in free air; note 2	260	K/W

Notes

- 1. Device mounted on a printed-circuit board, single sided copper, tinplated and standard footprint.
- 2. Device mounted on a printed-circuit board, single sided copper, tinplated and mounting pad for collector 1 cm².

40 V; 2 A NPN low V_{CEsat} (BISS) transistor

PBSS4240T

CHARACTERISTICS

 T_{amb} = 25 °C unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I _{CBO}	collector-base cut-off current	I _E = 0; V _{CB} = 30 V	-	_	100	nA
		$I_E = 0; V_{CB} = 30 V; T_j = 150 \ ^{\circ}C$	-	-	50	μA
I _{EBO}	emitter-base cut-off current	$I_{C} = 0; V_{EB} = 4 V$	-	-	100	nA
h _{FE}	DC current gain	I _C = 100 mA; V _{CE} = 2 V	350	470	-	
		I _C = 500 mA; V _{CE} = 2 V	300	450	-	
		$I_{C} = 1 \text{ A}; V_{CE} = 2 \text{ V}$	300	420	-	
		$I_{\rm C} = 2 \text{ A}; V_{\rm CE} = 2 \text{ V}$	150	250	-	
V _{CEsat}	collector-emitter saturation	I _C = 100 mA; I _B = 1 mA	-	45	70	mV
	voltage	I _C = 500 mA; I _B = 50 mA	-	70	100	mV
		I _C = 750 mA; I _B = 15 mA	-	120	180	mV
		$I_{C} = 1 \text{ A}; I_{B} = 50 \text{ mA}; \text{ note } 1$	-	130	180	mV
		$I_{C} = 2 \text{ A}; I_{B} = 200 \text{ mA}; \text{ note } 1$	-	240	320	mV
R _{CEsat}	equivalent on-resistance	I _C = 500 mA; I _B = 50 mA; note 1	-	140	<200	mΩ
V _{BEsat}	base-emitter saturation voltage	$I_{C} = 2 \text{ A}; I_{B} = 200 \text{ mA}; \text{ note } 1$	-	-	1.1	V
V _{BEon}	base-emitter turn on voltage	$I_{C} = 100 \text{ mA}; V_{CE} = 2 \text{ V}$	-	_	0.75	V
C _c	collector capacitance	$I_E = I_e = 0; V_{CB} = 10 V; f = 1 MHz$	-	15	20	pF
f _T	transition frequency	I_{C} = 100 mA; V_{CE} = 10 V; f = 100 MHz	100	230	-	MHz

Note


1. Pulse test: $t_p \leq 300~\mu s;~\delta \leq 0.02.$

SOT23

40 V; 2 A NPN low V_{CEsat} (BISS) transistor

PACKAGE OUTLINE



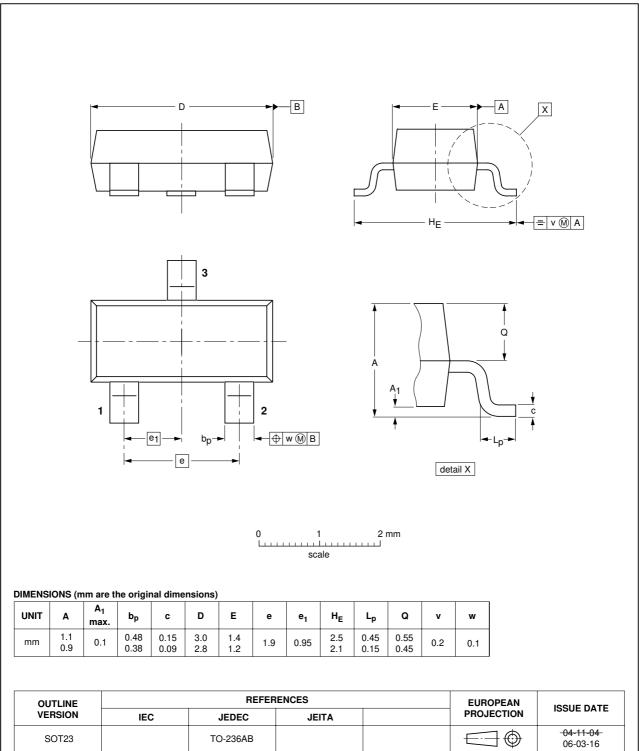

PBSS4240T

40 V; 2 A NPN low V_{CEsat} (BISS) transistor

PBSS4240T

DATA SHEET STATUS

DOCUMENT STATUS ⁽¹⁾	PRODUCT STATUS ⁽²⁾	DEFINITION
Objective data sheet	Development	This document contains data from the objective specification for product development.
Preliminary data sheet	Qualification	This document contains data from the preliminary specification.
Product data sheet	Production	This document contains the product specification.

Notes

- 1. Please consult the most recently issued document before initiating or completing a design.
- The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

DISCLAIMERS

General — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions

above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

NXP Semiconductors

Customer notification

This data sheet was changed to reflect the new company name NXP Semiconductors, including new legal definitions and disclaimers. No changes were made to the technical content, except for package outline drawings which were updated to the latest version.

Contact information

For additional information please visit: http://www.nxp.com For sales offices addresses send e-mail to: salesaddresses@nxp.com

© NXP B.V. 2009

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

R75/02/pp7

Date of release: 2004 Jan 09

Document order number: 9397 750 12435

