# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





### PI5A124

### Wide Bandwidth Analog Switches


#### Features

- Single-Supply Operation (+2V to +6V)
- Rail-to-Rail Analog Signal Dynamic Range
- Low On-Resistance ( $6\Omega$  typ. with 5V supply) Minimizes Distortion and Error Voltages
- On-Resistance Flatness, 3Ω typ.
- Low Charge Injection Reduces Glitch Errors. Q = 4pC typ.
- High Speed.  $t_{ON} = 10$ ns typ.
- Wide -3dB Bandwidth: 326 MHz (typ.)
- High-Current Channel Capability: >100mA
- TTL/CMOS Logic Compatible
- Low Power Consumption (0.5µW typ)
- · Small outline transistor package minimizes board area
- Packaging (Pb-free & Green available):
- 6-pin 65-mil wide SOT23 (T) for PI5A124

#### Applications

- · Audio, Video Switching, and Routing
- Battery-Powered Communication Systems
- Computer Peripherals
- Telecommunications
- Portable Instrumentation
- · Mechanical Relay Replacement
- Cell Phones
- PDAs

#### **Functional Diagrams/Pin Configurations**

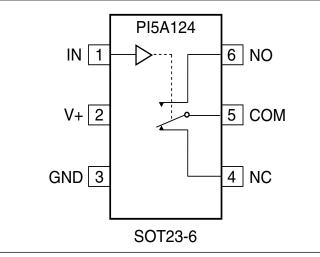

Switches shown for Logic "0" input

#### Description

The PI5A124 are analog switches designed for single-supply operation. These high-precision devices are ideal for low-distortion audio, video, signal switching and routing.

These switches are fully specified with +5V, and +3.3V supplies. With +5V, they guarantee <10 $\Omega$  On-Resistance. On-Resistance matching between channels is within 2 $\Omega$ . On-Resistance flatness is less than 55 $\Omega$  over the specified range. These switches also guarantee fast switching speeds (t<sub>ON</sub> <20ns).

These products are available in 6-pin SOT23 plastic packages for operation over the industrial ( $-40^{\circ}$ C to  $+85^{\circ}$ C) temperature range.

#### **Truth Tables**

|       | PI5A124 |     |  |  |
|-------|---------|-----|--|--|
| LOGIC | NC      | NO  |  |  |
| 0     | ON      | OFF |  |  |
| 1     | OFF     | ON  |  |  |

#### **Absolute Maximum Ratings**

| Absolute Maximum Ratings   | Thermal Information  |
|--|--|
| Voltages Referenced to Gnd   | Continuous Power Dissipation   |
| V+0.5V to +7V  | SOT23-6 (derate 7mW/°C above +70°C)  |
| $V_{IN}$ , $V_{COM}$ , $V_{NC}$ , $V_{NO}$ (Note 1)0.5V to V++2V or 30mA, whichever occurs first | Storage Temperature65°C to +150°C  |
| Current (any terminal)±25mA  | Lead Temperature (soldering, 10s) +300°C   |
| Peak Current, COM, NO, NC  | Note 1:  |
| (Pulsed at 1ms, 10% duty cycle)±25mA   | Signals on NC, NO, COM, or IN exceeding V+ or GND are clamped by internal diodes. Limit forward diode current to 30mA. |

Caution: Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied.

#### **Electrical Specifications - Single +5V Supply**

#### $(V + = +5V \pm 10\%, GND = 0V, V_{INH} = 2.4V, V_{INL} = 0.8V)$

| Parameter                                  | Symbol                  | Conditions  | Temp.(°C) | Min. <sup>(1)</sup> | Typ. <sup>(2)</sup> | Max. <sup>(1)</sup> | Units |
|--|-------------------------|---|-----------|---------------------|---------------------|---------------------|-------|
| Analog Switch                              |                         |   |           |                     |                     |                     |       |
| Analog Signal<br>Range <sup>(3)</sup>      | VANALOG                 |   | Full      | 0                   |                     | V+                  | V     |
| On-Resistance                              | Par                     |   | 25        |                     | 7.2                 | 10                  |       |
| OII-RESISTANCE                             | R <sub>ON</sub>         | V + = 4.5V,   | Full      |                     |                     | 12                  |       |
| On-Resistance                              |                         | $I_{COM} = -30 \text{mA},$  | 25        |                     | 0.2                 | 2                   |       |
| Match Between<br>Channels <sup>(4)</sup>   | $\Delta R_{ON}$         | $V_{\rm NO}$ or $V_{\rm NC}$ = +2.5V  | Full      |                     |                     | 4                   | Ω     |
| On-Resistance Flat-<br>ness <sup>(5)</sup> | R <sub>FLAT(ON</sub> )  | V+=5V,  | 25        |                     | 2.72                | 3.5                 |       |
|  |                         | $I_{COM} = -30 \text{mA},$<br>V <sub>NO</sub> or V <sub>NC</sub> = 1V, 2.5V, 4V | Full      |                     |                     | 4                   |       |
| (6)  | I <sub>NO(OFF)</sub> or | V+=5.5V,  | 25        |                     | 0.18                |                     |       |
|  | INO(OFF) OF<br>INC(OFF) | $V_{COM} = 0V,$<br>$V_{NO}$ or $V_{NC} = 4.5V$                                  | Full      | -1                  |                     | 150                 |       |
| COM Off Leakage<br>Current <sup>(6)</sup>  | I <sub>COM(OFF)</sub>   | $V + = 5.5V, V_{COM} = +4.5V,$<br>$V_{NO} \text{ or } V_{NC} = \pm 0V$          | 25        |                     | 0.20                |                     |       |
|  |                         |   | Full      | -1                  |                     | 150                 | - nA  |
| COM On Leakage                             | I <sub>COM(ON)</sub>    | V + = 5.5V,   | 25        |                     | 0.20                |                     |       |
| Current <sup>(6)</sup>                     |                         | $V_{COM} = +4.5V$<br>$V_{NO}$ or $V_{NC} = +4.5V$                               | Full      | -1                  |                     | 50                  |       |

#### **Electrical Specifications - Single +5V Supply**

 $(V + = +5V \pm 10\%, GND = 0V, V_{INH} = 2.4V, V_{INL} = 0.8V)$ 

| Parameter                          | Symbol                | Conditions   | Temp(°C) | Min. <sup>(1)</sup> | Typ. <sup>(2)</sup> | Max. <sup>(1)</sup> | Units |
|------------------------------------|-----------------------|--|----------|---------------------|---------------------|---------------------|-------|
| Logic Input                        |                       |  |          |                     |                     |                     |       |
| Input High Voltage                 | V <sub>IH</sub>       | Guaranteed logic High Level                                  |          | 2                   |                     |                     |       |
| Input Low Voltage                  | V <sub>IL</sub>       | Guaranteed logic Low Level                                   |          |                     |                     | 0.8                 | V     |
| Input Current with Voltage<br>High | I <sub>INH</sub>      | $V_{IN} = 2.4V$ , all others = $0.8V$                        | Full     | -1                  | 0.005               | 1                   | - μΑ  |
| Input Current with Voltage<br>Low  | I <sub>INL</sub>      | $V_{IN} = 0.8V$ , all others = 2.4V                          |          | -1                  | 0.005               | 1                   |       |
| Dynamic                            |                       |  |          |                     |                     |                     |       |
| Turn On Times                      |                       |  | 25       |                     | 7                   | 15                  |       |
| Turn-On Time                       | t <sub>ON</sub>       | - V+ = 5V, Figure 1  | Full     |                     |                     | 20                  | - ns  |
| <b>T</b> 0 <b>MT</b>               |                       |  | 25       |                     | 1                   | 7                   |       |
| Turn-Off Time                      | t <sub>OFF</sub>      |  | Full     |                     |                     | 10                  | 1     |
| Charge Injection <sup>(3)</sup>    | Q                     | $C_L = 1nF, V_{GEN} = 0V,$<br>$R_{GEN} = 0\Omega$ , Figure 2 |          |                     | 1.6                 | 10                  | pC    |
| Off Isolation                      | O <sub>IRR</sub>      | $R_L = 50\Omega$ , $C_L = 5pF$ ,<br>f = 10MHz, Figure 3      |          |                     | -43                 |                     | dB    |
| Crosstalk <sup>(8)</sup>           | X <sub>TALK</sub>     | $R_L = 50\Omega$ , $C_L = 5pF$ ,<br>f = 10MHz, Figure 4      | 25       |                     | -43                 |                     |       |
| NC or NO Capacitance               | C <sub>(OFF)</sub>    | C - 11 II - Elson 5  |          |                     | 5.5                 |                     | pF    |
| COM Off Capacitance                | C <sub>COM(OFF)</sub> | f = 1kHz, Figure 5   |          |                     | 5.5                 |                     |       |
| COM On Capacitance                 | C <sub>COM(ON)</sub>  | f = 1kHz, Figure 6   |          |                     | 13                  |                     |       |
| -3dB Bandwidth                     | BW                    | $R_L = 50\Omega$ , Figure 7                                  | Full     |                     | 326                 |                     | MHz   |
| Supply                             |                       |  |          |                     |                     |                     |       |
| Power-Supply Range                 | V+                    |  | F 11     | 2                   |                     | 6                   | V     |
| Positve Supply Current             | I+                    | $V + = 5.5V, V_{IN} = 0V \text{ or } V +$                    | – Full   |                     |                     | 1                   | μA    |

#### Notes:

1. The algebraic convention, where most negative value is a minimum and most positive is a maximum, is used in this data sheet.

2. Typical values are for DESIGN AID ONLY, not guaranteed or subject to production testing.

- 3. Guaranteed by design
- 4.  $\Delta R_{ON} = R_{ON} \max R_{ON} \min$
- 5. Flatness is defined as the difference between the maximum and minimum value of On-Resistance measured.
- 6. Leakage parameters are 100% tested at maximum rated hot temperature and guaranteed by correlation at +25°C.
- 7. Off Isolation =  $20\log_{10} [V_{COM} / (V_{NO} \text{ or } V_{NC})]$ . See Figure 3.
- 8. Between any two switches. See Figure 4.

| Parameter                          | Symbol                | Conditions  | Temp.(°C) | Min.(1) | <b>Typ.(2)</b> | Max.(1) | Units |
|------------------------------------|-----------------------|---|-----------|---------|----------------|---------|-------|
| Analog Switch                      |                       |   |           |         |                |         |       |
| Analog Signal Range <sup>(3)</sup> | VANALOG               |   |           | 0       |                | V+      | V     |
| On-Resistance                      | D                     | $V + = 3V$ , $I_{COM} = -30mA$ , $V_{NO}$ or<br>$V_{NC} = 1.5V$       | 25        |         | 12             | 18      | -     |
| On-Resistance                      | R <sub>ON</sub>       |   | Full      |         |                | 22      |       |
| On-Resistance Match                | $\Delta R_{ON}$       |   | 25        |         | 1              | 1       | Ω     |
| Between Channels <sup>(4)</sup>    | ANON                  | $V + = 3.3V, I_{COM} = -30mA,$  | Full      |         |                | 2       |       |
| On-Resistance Flat-                | R <sub>FLAT(ON)</sub> | $V_{\rm NO} \text{ or } V_{\rm NC} = 0.8 \text{V}, 2.5 \text{V}$      | 25        |         | 0.5            | 4       |       |
| ness <sup>(3,5)</sup>              | KFLAI(ON)             |   | Full      |         |                | 5       |       |
| Dynamic                            |                       |   |           |         |                |         |       |
| T On Time                          |                       |   | 25        |         | 15             | 25      |       |
| Turn-On Time                       | t <sub>ON</sub>       | $-V_{NO} = 3.3V,$<br>$-V_{NO} \text{ or } V_{NC} = 1.5V,$<br>Figure 1 | Full      |         |                | 40      | ns    |
|                                    | <i>t</i>              |   | 25        |         | 1.5            | 12      |       |
| Turn-Off Time                      | t <sub>OFF</sub>      | 0 <sup></sup>   | Full      |         |                | 20      |       |
| Charge Injection <sup>(3)</sup>    | Q                     | $C_L = 1nF, V_{GEN} = 0V,$<br>$R_{GEN} = 0V,$ Figure 2                | 25        |         | 1.3            | 10      | pC    |
| Supply                             |                       |   |           |         |                |         |       |
| Positve Supply Current             | I+                    | V+ = 3.6V, $V_{IN}$ = 0V or V+ All<br>Channels on or off              | Full      |         |                | 1       | μA    |
| Logic Input                        |                       |   |           |         |                |         |       |
| Input High Voltage                 | V <sub>IH</sub>       | Guaranteed logic high level   | Full      | 2       |                |         | v     |
| Input Low Voltage                  | V <sub>IL</sub>       | Guaranteed logic low level  | Full      |         |                | 0.8     | v     |
| Input High Current                 | I <sub>INH</sub>      | $V_{\rm IN} = 2.4$ V, all others = 0.8V                               | Full      | -1      |                | 1       |       |
| Input Low Current                  | I <sub>INL</sub>      | $V_{IN} = 0.8V$ , all others = 2.4V                                   | Full      | -1      |                | 1       | μΑ    |

## Electrical Specifications - Single +3.3V Supply (V+ = +3.3V $\pm$ 10%, GND = 0V, V<sub>INH</sub> = 2.4V, V<sub>INL</sub> = 0.8V)

#### **Test Circuits/Timing Diagrams**

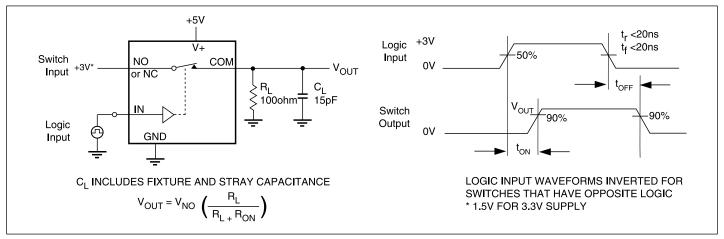


Figure 1. Switching Time

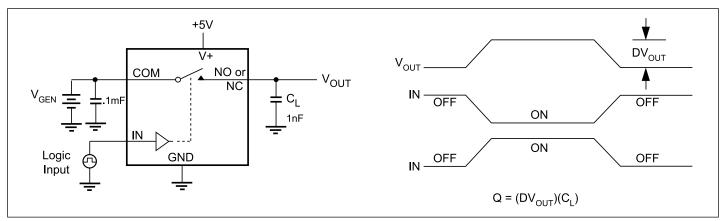


Figure 2. Charge Injection

#### **Test Circuits/Timing Diagrams**

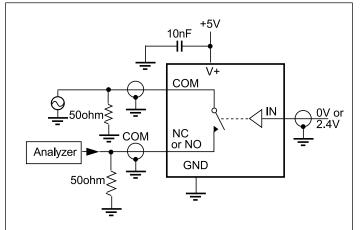


Figure 3. Off Isolation

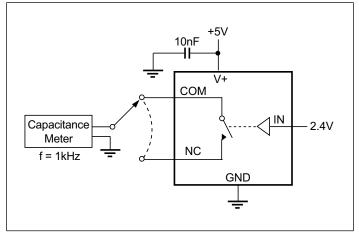


Figure 5. Channel-Off Capacitance

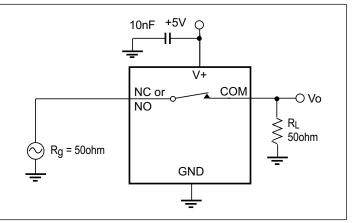


Figure 7. Bandwidth

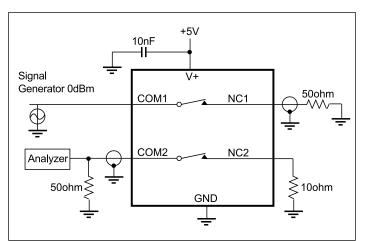


Figure 4. Crosstalk (124 only)


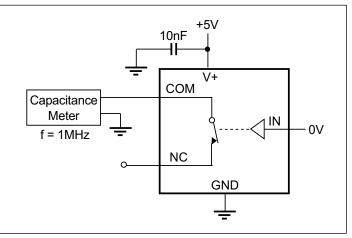


Figure 6. Channel-On Capacitance

#### Packaging Mechanical: SOT23 (T)

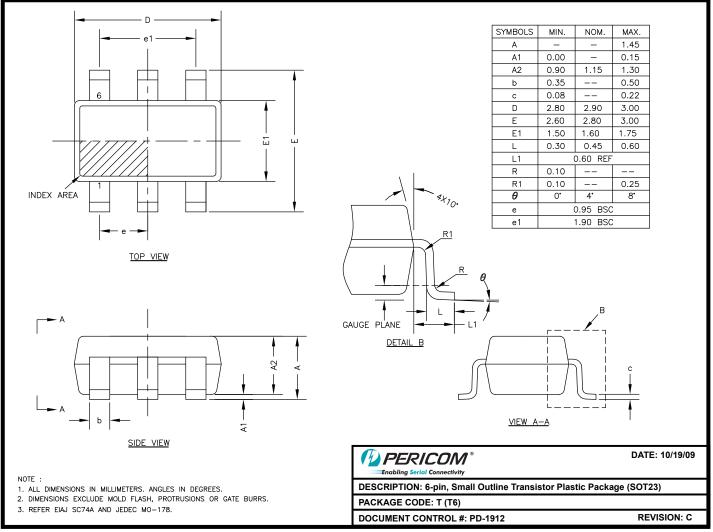

09-0131

Note:

• For latest package info, please check: http://www.pericom.com/products/packaging/mechanicals.php

#### **Ordering Information**

| Ordeing Code | Packaging Code | Package Type  | Top Marking |
|--------------|----------------|---|-------------|
| PI5A124TE    | Т              | 6-pin, Small Outline Transistor Plastic Package (SOT23) | ZT          |

Notes:

- · Thermal characteristics can be found on the company web site at www.pericom.com/packaging/
- E = Pb-free and Green
- Adding an X suffix = Tape/Reel

#### Pericom Semiconductor Corporation • 1-800-435-2336 • www.pericom.com