

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









## 12-Channel, 2:1 Mux/DeMux Bus Switch


#### **Features**

- Near-Zero propagation delay
- 5-ohm switches connect inputs to outputs
- Direct bus connection when switches are ON
- Ultra Low Quiescent Power (0.2µA typical) - Ideally suited for notebook applications
- Packaging (Pb-free & Green Available):
  - 48-pin 150 mil wide plastic BQSOP (B)

### **Description**

The PI5C33X257 is a 12-channel, 2:1 multiplexer/demultiplexer with three-state outputs. Inputs can be connected to outputs with low on resistance (5-ohm) with no additional ground bounce noise or propagation delay.

### **Pin Configuration**

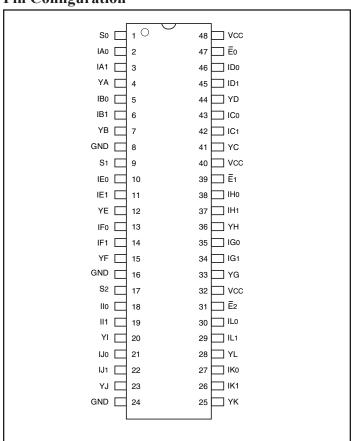

### Truth Table(1)

En	Sn	YA <sup>(2)</sup>	YB <sup>(2)</sup>	YC <sup>(2)</sup>	$YD^{(2)}$	Function
Н	X	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Disable
L	L	IA0	IB0	IC0	ID0	S = 0
L	Н	IA1	IB1	IC1	ID1	S = 1

### **Notes:** 1. H = High Voltage Level


L = Low Voltage Level

2. n = 0 YA, YB, YC, YD

n = 1 YE, YF, YG, YH

n = 2 YI, YJ, YK, YL

### Logic Block Diagram

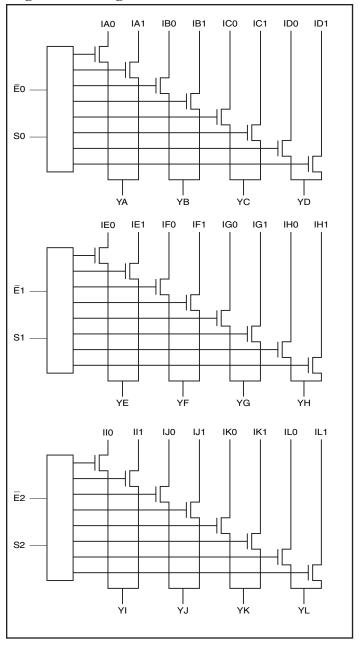



### **Product Pin Description**

Pin Name	Description
IAn-ILn	Data Inputs
S	Select Inputs
En	Enable
YA-YL	Data Outputs
GND	Ground
Vcc	Power

### **Maximum Ratings**

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature65°C to +150°C
Ambient Temperature with Power Applied—40°C to +85°C
Supply Voltage to Ground Potential (Inputs & Vcc Only)0.5V to +7.0V
Supply Voltage to Ground Potential (Outputs & D/O Only)0.5V to +7.0V
DC Input Voltage0.5V to +7.0V
DC Output Current
Power Dissipation

### Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

### **DC Electrical Characteristics** (Over the Operating Range, $TA = -40^{\circ}C$ to $+85^{\circ}C$ , $VCC = 5V \pm 5\%$ )

Parameters	Description	Test Conditions <sup>(1)</sup>	Min.	Typ <sup>(2)</sup>	Max.	Units
Vih	Input HIGH Voltage	Guaranteed Logic HIGH Level	2.0			V
VIL	Input LOW Voltage	Guaranteed Logic LOW Level	-0.5		0.8	V
IIH	Input HIGH Current	$V_{CC} = Max., V_{IN} = V_{CC}$			±1	мА
IIL	Input LOW Current	$V_{CC} = Max., V_{IN} = GND$			±1	мА
Іохн	High Impedance Output Current	$0 \le I, Y \le V_{CC}$			±1	мА
Vik	Clamp Diode Voltage	$V_{CC} = Min., I_{IN} = -18 \text{ mA}$		-0.7	-1.2	V
Ios	Short Circuit Current <sup>(3)</sup>	$I(Y) = 0V, Y(I) = V_{CC}$	100			mA
VH	Input Hysteresis at Control Pins			150		mV
Ron	Switch On Resistance <sup>(4)</sup>	$V_{CC} = Min., V_{IN} = 0.0V, I_{ON} = 48 \text{ mA}$		5	7	ohm
		$V_{CC} = Min., V_{IN} = 2.4V, I_{ON} = 15 \text{ mA}$		10	15	

#### Notes:

- 1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
- 2. Typical values are at Vcc = 5.0V,  $TA = 25^{\circ}C$  ambient and maximum loading.
- 3. Not more than one output should be shorted at one time. Duration of the test should not exceed one second.
- 4. Measured by the voltage drop between I and Y pin at indicated current through the switch. ON resistance is determined by the lower of the voltages on the two (I,Y) pins.

### Capacitance ( $T_A = 25^{\circ}C$ , f = 1 MHz)

Parameters <sup>(5)</sup>	Description	Test Conditions	Max.	Units
CIN	Input Capacitance	$V_{IN} = 0V$	6	pF
Coff	In/Yn Capacitance, Switch Off	$V_{IN} = 0V$	6	pF
Con	In/Yn Capacitance, Switch On	$V_{IN} = 0V$	14	pF

#### Notes:

5. This parameter is determined by device characterization but is not production tested.



### **Power Supply Characteristics**

Parameters	Description	Test Conditions <sup>(1)</sup>		Min.	Typ <sup>(2)</sup>	Max.	Units
Icc	Quiescent Power Supply Current	$V_{CC} = Max.$	$V_{IN} = GND \text{ or } V_{CC}$		0.1	3.0	μА
ΔΙcc	Supply Current per Input @ TTL HIGH	$V_{CC} = Max.$	$V_{IN} = 3.4V^{(3)}$			2.5	mA
ICCD	Supply Current per Input per MHz <sup>(4)</sup>	Vcc = Max., I and Y Pins Open  BE = GND Control Input Toggling 50% Duty Cycle				0.25	mA/ MHz

#### **Notes:**

- 1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device.
- 2. Typical values are at Vcc = 5.0V,  $+25^{\circ}C$  ambient.
- 3. Per TTL driven input (V<sub>IN</sub> = 3.4V, control inputs only); I and Y pins do not contribute to Icc.
- 4. This current applies to the control inputs only and represent the current required to switch internal capacitance at the specified frequency. The I and Y inputs generate no significant AC or DC currents as they transition. This parameter is not tested, but is guaranteed by design.

### **Switching Characteristics over Operating Range**

			PI5C3	3X257	
			Co	m.	
Parameters	Description	$Conditions^{(1)}$	Min.	Max.	Unit
tiy	Propagation Delay <sup>(2,3)</sup>	$C_L = 50 \text{ pF}$		0.25	ns
	In to Yn	RL = 500-ohm			
tsy	Bus Select Time		0.5	5.2	ns
	Sn to Yn				
<b>t</b> PZH	Bus Disable Time		0.5	4.8	ns
t <sub>PZL</sub>	E to Yn				
<b>t</b> PHZ	Bus Disable Time		0.5	5.0	ns
t <sub>PLZ</sub>	Ē to Yn				


#### Notes:

- 1. See test circuit and waveforms.
- 2. This parameter is guaranteed but not tested on Propagation Delays.
- 3. The bus switch contributes no propagational delay other than the RC delay of the ON resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.25ns for 50pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagational delay to the system. Propagational delay of the bus switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.

06-0237 3 PS8114C 11/03/06



### **Test Circuits**

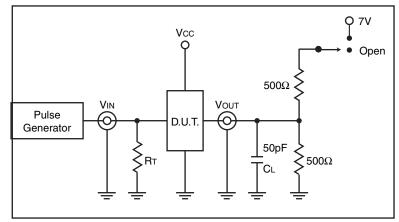

### **Switch Position**


Test	Switch
Disable LOW	Closed
Enable LOW	Closed
$t_{\mathrm{PD}}$	Open

#### **Definitions:**


C<sub>L</sub> = Load capacitance (includes jig and probe capacitance)

 $R_T$  = Termination resistance (should be equal to  $Z_{OUT}$  of the pulse generator)

### **Enable and Disable Timing**

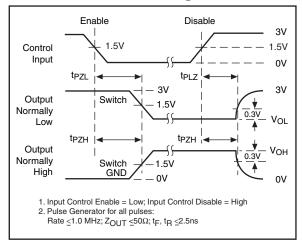


### **Propagation Delay**

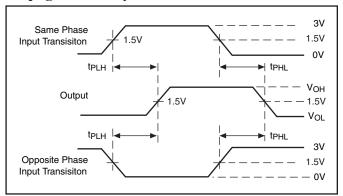



### Packaging Mechanical: 48-pin BQSOP (B)

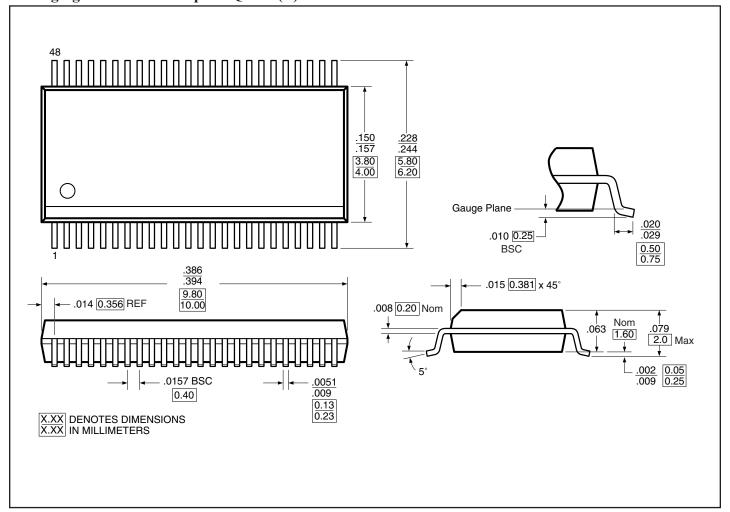

### **Ordering Information**

Ordering Code Packaging Code		Package Type		
PI5C33X257B	В	48-pin, 150 mil wide plastic BQSOP		
PI5C33X257BE	В	Pb-free & Green, 48-pin, 150 mil wide plastic BQSOP		

#### **Notes:**

- Thermal characteristics can be found on the company web site at www.pericom.com/packaging/
- E = Pb-free & Green
- Adding X suffix = Tape/Reel