mail

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





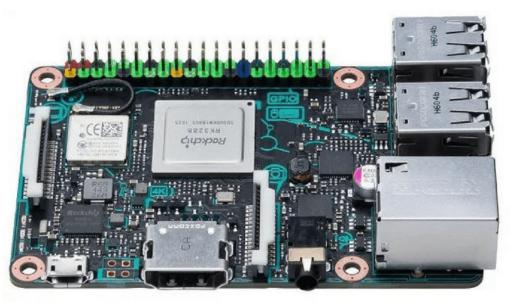

Asus Tinkerboard

SKU: PIS-0531

The Tinker Board features a fast on-board processor to increase its operational speed. It also features Wi-Fi and Bluetooth capabilities to enhance the functionality to allow connection to a variety of wireless networks.

- Quad core 1.8GHz ARM Cortex-A17 CPU
- 2GB Dual channel LPDDR3 memory
- Gigabit LAN and Bluetooth 4.0 + EDR connectivity
- 802.11 b/g/n Wi-Fi
- 4x USB 2.0 ports
- 40-pin Internal header with 28 GPIO pins
- Contact points for PWM and S/PDIF signals
- 1x 3.5mm Audio jack connection
- CSI port for camera connection
- DSI port supporting HD resolution
- 1x HDMI 2.0 port to support 4K resolution
- Micro SD port supports UHS-I
- Supports Debian OS with KODI
- Power supply: 5V/ 2A Micro USB (not included)

Additional information

WEIGHT	0.16 kg
DIMENSIONS	15.5 x 11 x 4 cm