

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








DISCRETE SEMICONDUCTORS

DATA SHEET



PN2907A PNP switching transistor

Product data sheet Supersedes data of 1997 May 05 2004 Oct 11



PNP switching transistor

PN2907A

FEATURES

- High current (max. 600 mA)
- Low voltage (max. 60 V).

APPLICATIONS

• Switching and linear amplification.

DESCRIPTION

PNP switching transistor in a TO-92; SOT54 plastic package. NPN complement: PN2222A.

PINNING

PIN	DESCRIPTION
1	collector
2	base
3	emitter

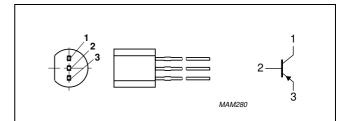


Fig.1 Simplified outline (TO-92; SOT54) and symbol.

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS		MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	-	-60	V
V_{CEO}	collector-emitter voltage	open base	_	-60	V
I _C	collector current (DC)		_	-600	mA
P _{tot}	total power dissipation	T _{amb} ≤ 25 °C	_	500	mW
h _{FE}	DC current gain	$V_{CE} = -10 \text{ V}; I_{C} = -150 \text{ mA}$	100	300	
f _T	transition frequency	$V_{CE} = -20 \text{ V}; I_{C} = -50 \text{ mA}; f = 100 \text{ MHz}$	200	_	MHz
t _{off}	turn-off time	$I_{Con} = -150 \text{ mA}; I_{Bon} = -15 \text{ mA}; I_{Boff} = 15 \text{ mA}$	_	365	ns

ORDERING INFORMATION

TYPE NUMBER	PACKAGE					
NAME		DESCRIPTION	VERSION			
PN2907A	SC-43A	plastic single-ended leaded (through hole) package; 3 leads	SOT54			

PNP switching transistor

PN2907A

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	_	-60	V
V _{CEO}	collector-emitter voltage	open base	_	-60	V
V _{EBO}	emitter-base voltage	open collector	_	-5	V
Ic	collector current (DC)		_	-600	mA
I _{CM}	peak collector current		-	-800	mA
I _{BM}	peak base current		_	-200	mA
P _{tot}	total power dissipation	T _{amb} ≤ 25 °C	_	500	mW
T _{stg}	storage temperature		-65	+150	°C
Tj	junction temperature		_	150	°C
T _{amb}	ambient temperature		-65	+150	°C

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
R _{th(j-a)}	thermal resistance from junction to ambient	note 1	250	K/W

Note

1. Transistor mounted on an FR4 printed-circuit board.

CHARACTERISTICS


 T_{amb} = 25 °C unless otherwise specified.

SYMBOL	PARAMETER	PARAMETER CONDITIONS			UNIT
I _{CBO}	collector-base cut-off current	$V_{CB} = -50 \text{ V}; I_E = 0 \text{ A}$	_	-10	nA
		$V_{CB} = -50 \text{ V}; I_E = 0 \text{ A}; T_j = 125 ^{\circ}\text{C}$	_	-10	μΑ
I _{EBO}	emitter-base cut-off current	$V_{EB} = -5 \text{ V}; I_C = 0 \text{ A}$	_	-50	nA
h _{FE}	DC current gain	$V_{CE} = -10 \text{ V}; I_{C} = -0.1 \text{ mA}$	75	_	
		$V_{CE} = -10 \text{ V}; I_{C} = -1 \text{ mA}$	100	_	
		$V_{CE} = -10 \text{ V}; I_{C} = -10 \text{ mA}$	100	_	
		$V_{CE} = -10 \text{ V}; I_{C} = -150 \text{ mA}$	100	300	
		$V_{CE} = -10 \text{ V}; I_{C} = -500 \text{ mA}$	50	_	
V _{CEsat}	collector-emitter saturation voltage	$I_C = -150 \text{ mA}; I_B = -15 \text{ mA}$	_	-400	mV
		$I_C = -500 \text{ mA}; I_B = -50 \text{ mA}$	_	-1.6	٧
V _{BEsat}	base-emitter saturation voltage	$I_C = -150 \text{ mA}; I_B = -15 \text{ mA}$	_	-1.3	٧
		$I_C = -150 \text{ mA}; I_B = -50 \text{ mA}$	_	-2.6	V
C _c	collector capacitance	$V_{CB} = -10 \text{ V}; I_E = i_e = 0 \text{ A}; f = 1 \text{ MHz}$	_	8	pF
C _e	emitter capacitance	$V_{EB} = -2 \text{ V}; I_C = i_C = 0 \text{ A}; f = 1 \text{ MHz}$	_	30	pF
f _T	transition frequency	$V_{CE} = -20 \text{ V}; I_{C} = -50 \text{ mA}; f = 100 \text{ MHz}$	200	_	MHz

PNP switching transistor

PN2907A

SYMBOL	PARAMETER	MIN.	MAX.	UNIT	
Switching times (between 10 % and 90 % levels); see Fig.2					
t _{on}	turn-on time	$I_{Con} = -150 \text{ mA}; I_{Bon} = -15 \text{ mA};$	_	40	ns
t _d	delay time	I _{Boff} = 15 mA	_	12	ns
t _r	rise time		_	30	ns
t _{off}	turn-off time		_	365	ns
t _s	storage time		_	300	ns
t _f	fall time		_	65	ns

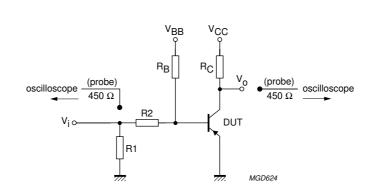

$$\begin{split} V_i = -9.5 \text{ V; T} &= 500 \text{ } \mu\text{s; } t_p = 10 \text{ } \mu\text{s; } t_r = t_f \leq 3 \text{ ns.} \\ R1 &= 68 \text{ } \Omega; \text{ } R2 = 325 \text{ } \Omega; \text{ } R_B = 325 \text{ } \Omega; \text{ } R_C = 160 \text{ } \Omega. \end{split}$$

 $V_{BB} = 3.5 \text{ V}$; $V_{CC} = -29.5 \text{ V}$.

Oscilloscope: input impedance Z_i = 50 Ω .

Fig.2 Test circuit for switching times.

2004 Oct 11


PNP switching transistor

PN2907A

PACKAGE OUTLINE

Plastic single-ended leaded (through hole) package; 3 leads

SOT54

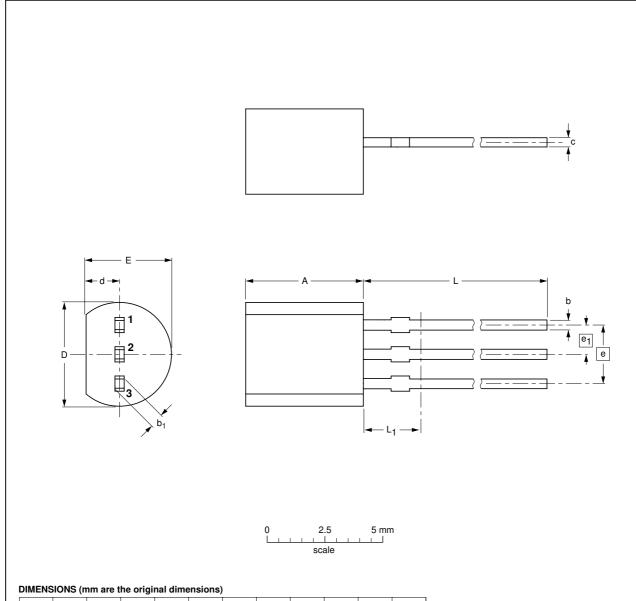

UNIT	Α	b	b ₁	С	D	d	E	е	e ₁	L	L ₁ ⁽¹⁾ max.
mm	5.2 5.0	0.48 0.40	0.66 0.55	0.45 0.38	4.8 4.4	1.7 1.4	4.2 3.6	2.54	1.27	14.5 12.7	2.5

Note

1. Terminal dimensions within this zone are uncontrolled to allow for flow of plastic and terminal irregularities.

OUTLINE		REFERENCES			EUROPEAN	ISSUE DATE
VERSION	IEC	JEDEC	JEITA		PROJECTION	ISSUE DATE
SOT54		TO-92	SC-43A			-04-06-28- 04-11-16

PNP switching transistor

PN2907A

DATA SHEET STATUS

DOCUMENT STATUS ⁽¹⁾	PRODUCT STATUS ⁽²⁾	DEFINITION
Objective data sheet	Development	This document contains data from the objective specification for product development.
Preliminary data sheet	Qualification	This document contains data from the preliminary specification.
Product data sheet	Production	This document contains the product specification.

Notes

- 1. Please consult the most recently issued document before initiating or completing a design.
- 2. The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

DISCLAIMERS

General — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings

System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

NXP Semiconductors

Customer notification

This data sheet was changed to reflect the new company name NXP Semiconductors, including new legal definitions and disclaimers. No changes were made to the technical content, except for package outline drawings which were updated to the latest version.

Contact information

For additional information please visit: http://www.nxp.com

For sales offices addresses send e-mail to: salesaddresses@nxp.com

© NXP B.V. 2009

 $All\ rights\ are\ reserved.\ Reproduction\ in\ whole\ or\ in\ part\ is\ prohibited\ without\ the\ prior\ written\ consent\ of\ the\ copyright\ owner.$

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

 Printed in The Netherlands
 R75/03/pp7
 Date of release: 2004 Oct 11
 Document order number: 9397 750 13621

