

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









# PHOTOCOUPLER PS2703-1

# HIGH ISOLATION VOLTAGE HIGH COLLECTOR TO EMITTER VOLTAGE TYPE SOP MULTI PHOTOCOUPLER -NEPOC Series-

#### **DESCRIPTION**

The PS2703-1 is an optically coupled isolator containing a GaAs light emitting diode and an NPN silicon phototransistor.

This is mounted in a plastic SOP (Small Outline Package) for high density applications.

This package has shield effect to cut off ambient light.

#### **FEATURES**


- High isolation voltage (BV = 3 750 Vr.m.s.)
- High collector to emitter voltage (VcEo = 120 V)
- · SOP (Small Outline Package) type
- · Each isolated channel per package
- High-speed switching (tr, tf = 10  $\mu$ s TYP.)
- · Taping product number: PS2703-1-F3, F4
- Safety standards
  - UL approved: File No. E72422
  - BSI approved: File No. 8219/8220
  - CSA approved: File No. CA 101391
  - DIN EN60747-5-2 (VDE0884 Part2) approved (Option)

#### **APPLICATIONS**


- Hybrid IC
- Telephone/FAX
- · FA/OA equipment
- · Programmable logic controllers
- Power supply

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

## **PACKAGE DIMENSIONS (in millimeters)**

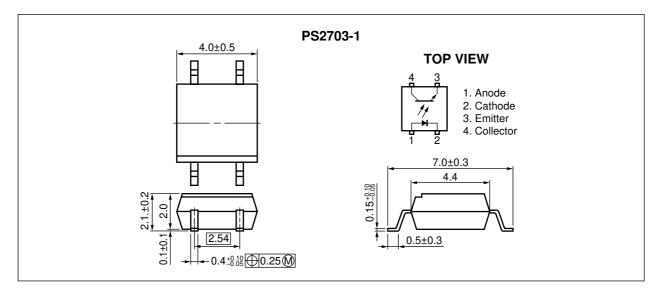

#### **★ MARKING EXAMPLE**

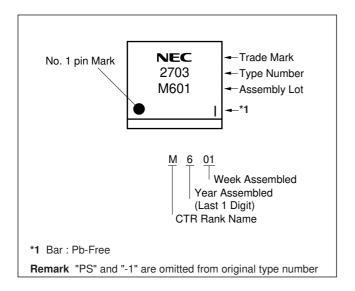

## **★ ORDERING INFORMATION**

Part Number	Order Number	Solder Plating Specification	Packing Style	Safety Standard Approval	Application Part Number*1
PS2703-1	PS2703-1-A	Pb-Free	Magazine case 100 pcs	Standard products	PS2703-1
PS2703-1-F3	PS2703-1-F3-A		Embossed Tape 3 500 pcs/reel	(UL, BSI, CSA	
PS2703-1-F4	PS2703-1-F4-A			approved)	
PS2703-1-V	PS2703-1-V-A		Magazine case 100 pcs	DIN EN60747-5-2	
PS2703-1-V-F3	PS2703-1-V-F3-A		Embossed Tape 3 500 pcs/reel	(VDE0884 Part2)	
PS2703-1-V-F4	PS2703-1-V-F4-A			Approved (Option)	

<sup>\*1</sup> For the application of the Safety Standard, following part number should be used.

## ABSOLUTE MAXIMUM RATINGS (TA = 25°C, unless otherwise specified)

	Parameter	Symbol	Ratings	Unit
Diode	Forward Current (DC)	lF	50	mA
	Reverse Voltage	VR	6	٧
	Power Dissipation Derating	⊿P <sub>D</sub> /°C	0.8	mW/°C
	Power Dissipation	PD	80	mW
	Peak Forward Current*1	IFP	1	Α
Transistor	Collector to Emitter Voltage	VCEO	120	٧
	Emitter to Collector Voltage	VECO	6	٧
	Collector Current	lc	30	mA
	Power Dissipation Derating	⊿Pc/°C	1.5	mW/°C
	Power Dissipation	Pc	150	mW
Isolation Voltage*2		BV	3 750	Vr.m.s.
Operating Ambient Temperature		Та	-55 to +100	°C
Storage Temperature		T <sub>stg</sub>	-55 to +150	°C

<sup>\*1</sup> PW = 100  $\mu$ s, Duty Cycle = 1%

<sup>\*2</sup> AC voltage for 1 minute at  $T_A = 25$ °C, RH = 60% between input and output Pins 1-2 shorted together, 3-4 shorted together.


## ELECTRICAL CHARACTERISTICS (Ta = 25 °C)

	Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Diode	Forward Voltage	VF	I <sub>F</sub> = 5 mA		1.1	1.4	٧
	Reverse Current	lR	V <sub>R</sub> = 5 V			5	μА
	Terminal Capacitance	Ct	V = 0 V, f = 1 MHz		30		pF
Transistor	Collector to Emitter Dark Current	Iceo	IF = 0 mA, VcE = 120 V			100	nA
Coupled	Current Transfer Ratio	CTR	IF = 5 mA, VCE = 5 V	50	150	400	%
	(Ic/IF)*1		IF = 1 mA, VcE = 5 V	10	80		
	Collector Saturation Voltage	VCE (sat)	I <sub>F</sub> = 10 mA, I <sub>C</sub> = 2 mA			0.3	V
	Isolation Resistance	R <sub>I-O</sub>	Vi-o = 1 kVpc	10 <sup>11</sup>			Ω
	Isolation Capacitance	C <sub>I-O</sub>	V = 0 V, f = 1 MHz		0.4		pF
	Rise Time *2	tr	$Vcc = 5 \text{ V}, \text{ Ic} = 2 \text{ mA}, \text{ RL} = 1 \text{ k}\Omega$		10		μS
	Fall Time *2	tf			10		

#### \*1 CTR rank


CTR rank	CTR (%)	Conditions		
K	200 to 400	IF = 5 mA, VCE = 5 V		
	80 to	IF = 1 mA, VCE = 5 V		
L	100 to 300	IF = 5 mA, VCE = 5 V		
	25 to	IF = 1 mA, VCE = 5 V		
М	50 to 150	IF = 5 mA, VCE = 5 V		
	10 to	IF = 1 mA, VCE = 5 V		

## \*2 Test circuit for switching time




## TYPICAL CHARACTERISTICS (Ta = 25°C, unless otherwise specified)






#### FORWARD CURRENT vs. FORWARD VOLTAGE




#### COLLECTOR TO EMITTER DARK **CURRENT vs. AMBIENT TEMPERATURE**




#### Remark The graphs indicate nominal characteristics.


#### TRANSISTOR POWER DISSIPATION vs. AMBIENT TEMPERATURE




#### COLLECTOR CURRENT vs. COLLECTOR TO EMITTER VOLTAGE




COLLECTOR CURRENT vs. **COLLECTOR SATURATION VOLTAGE** 




# NORMALIZED CURRENT TRANSFER RATIO vs. AMBIENT TEMPERATURE



# SWITCHING TIME vs. LOAD RESISTANCE




# SWITCHING TIME vs. LOAD RESISTANCE




#### Remark The graphs indicate nominal characteristics.


# CURRENT TRANSFER RATIO vs. FORWARD CURRENT




#### FREQUENCY RESPONSE



#### LONG TIME CTR DEGRADATION



## **TAPING SPECIFICATIONS (in millimeters)**

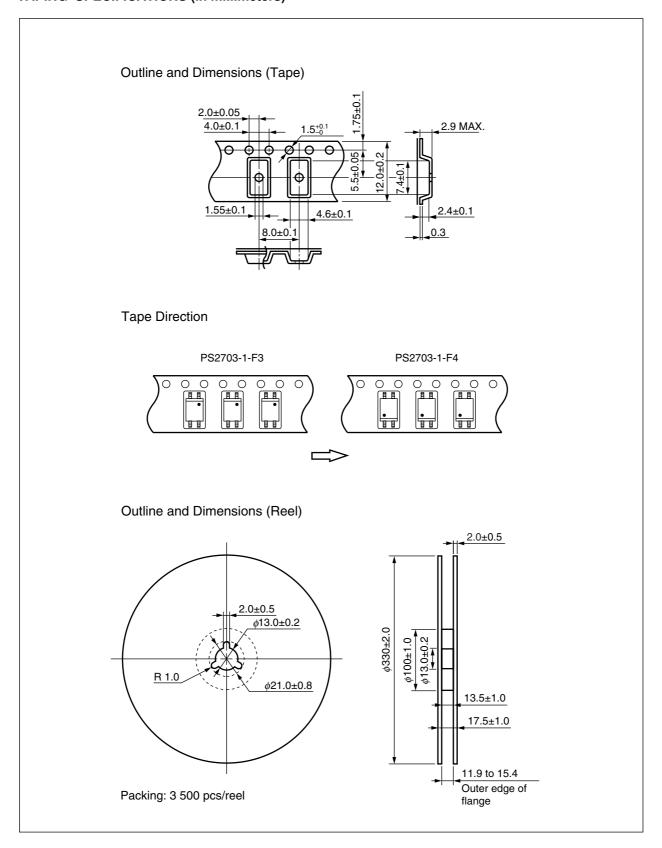

#### **NOTES ON HANDLING**

#### 1. Recommended soldering conditions

#### (1) Infrared reflow soldering


• Peak reflow temperature 260°C or below (package surface temperature)

Time of peak reflow temperature
 Time of temperature higher than 220°C
 10 seconds or less
 60 seconds or less

Time to preheat temperature from 120 to 180°C 120±30 s
 Number of reflows Three

• Flux Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

#### Recommended Temperature Profile of Infrared Reflow

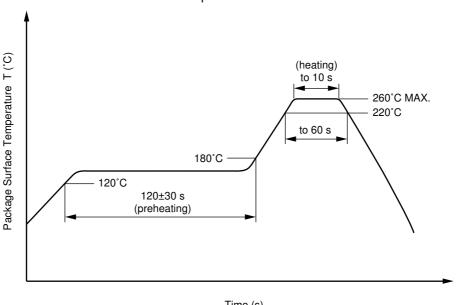

#### Time (s)

#### (2) Wave soldering

• Temperature 260°C or below (molten solder temperature)

• Time 10 seconds or less

• Preheating conditions 120°C or below (package surface temperature)

• Number of times One (Allowed to be dipped in solder including plastic mold portion.)

• Flux Rosin flux containing small amount of chlorine (The flux with a maximum chlorine

content of 0.2 Wt% is recommended.)

#### ★ (3) Soldering by soldering iron

Peak temperature (lead part temperature)
 Time (each pins)
 350°C or below
 3 seconds or less

Flux
 Rosin flux containing small amount of chlorine (The flux with a

maximum chlorine content of 0.2 Wt% is recommended.)

(a) Soldering of leads should be made at the point 1.5 to 2.0 mm from the root of the lead.

(b) Please be sure that the temperature of the package would not be heated over 100°C.

#### (4) Cautions

Fluxes

Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.

#### 2. Cautions regarding noise

Be aware that when voltage is applied suddenly between the photocoupler's input and output or between collector-emitters at startup, the output transistor may enter the on state, even if the voltage is within the absolute maximum ratings.

#### ★ 3. Measurement conditions of current transfer ratios (CTR), which differ according to photocoupler

Check the setting values before use, since the forward current conditions at CTR measurement differ according to product.

When using products other than at the specified forward current, the characteristics curves may differ from the standard curves due to CTR value variations or the like. Therefore, check the characteristics under the actual operating conditions and thoroughly take variations or the like into consideration before use.

#### **USAGE CAUTIONS**

- 1. Protect against static electricity when handling.
- 2. Avoid storage at a high temperature and high humidity.

# SPECIFICATION OF VDE MARKS LICENSE DOCUMENT (VDE0884)

Parameter	Symbol	Speck	Unit
Application classification (DIN VDE 0109)			
for rated line voltages ≤ 300 Vr.m.s.		IV	
for rated line voltages ≤ 600 Vr.m.s.		III	
Climatic test class (DIN IEC 68 Teil 1/09.80)		55/100/21	
Dielectric strength maximum operating isolation voltage.			
Test voltage (partial discharge test procedure a for type test and random test)	UIORM	710	$V_{\text{peak}}$
U <sub>pr</sub> = 1.2 × U <sub>IORM</sub> , P <sub>d</sub> < 5 pC	$U_pr$	850	$V_{\text{peak}}$
Test voltage (partial discharge test procedure b for all devices test) $U_{pr}=1.6\times U_{IORM}, P_d<5pC$	Upr	1 140	Vpeak
Highest permissible overvoltage	Utr	6 000	V <sub>peak</sub>
Degree of pollution (DIN VDE 0109)		2	
Clearance distance		> 5	mm
Creepage distance		> 5	mm
Comparative tracking index (DIN IEC 112/VDE 0303 part 1)	CTI	175	
Material group (DIN VDE 0109)		III a	
Storage temperature range	T <sub>stg</sub>	-55 to +150	°C
Operating temperature range	TA	-55 to +100	°C
Isolation resistance, minimum value			
$V_{IO} = 500 \text{ V dc}$ at $T_A = 25  ^{\circ}\text{C}$	Ris MIN.	10 <sup>12</sup>	Ω
$V_{10} = 500 \text{ V dc}$ at T <sub>A</sub> MAX. at least 100 °C	Ris MIN.	10 <sup>11</sup>	Ω
Safety maximum ratings (maximum permissible in case of fault, see thermal derating curve)			
Package temperature	Tsi	150	°C
Current (input current I <sub>F</sub> , Psi = 0)	Isi	200	mA
Power (output or total power dissipation)	Psi	300	mW
Isolation resistance			
$V_{IO} = 500 \text{ V dc at T}_A = 175 ^{\circ}\text{C (Tsi)}$	Ris MIN.	10 <sup>9</sup>	Ω

When the product(s) listed in this document is subject to any applicable import or export control laws and regulation of the authority having competent jurisdiction, such product(s) shall not be imported or exported without obtaining the import or export license.

- The information in this document is current as of March, 2006. The information is subject to change
  without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data
  books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products
  and/or types are available in every country. Please check with an NEC sales representative for
  availability and additional information.
- No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
- NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of
  third parties by or arising from the use of NEC semiconductor products listed in this document or any other
  liability arising from the use of such products. No license, express, implied or otherwise, is granted under any
  patents, copyrights or other intellectual property rights of NEC or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers
  agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize
  risks of damage to property or injury (including death) to persons arising from defects in NEC
  semiconductor products, customers must incorporate sufficient safety measures in their design, such as
  redundancy, fire-containment, and anti-failure features.
- NEC semiconductor products are classified into the following three quality grades:
  - "Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.
  - "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
  - "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
  - "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.

(Note)

- (1) "NEC" as used in this statement means NEC Corporation, NEC Compound Semiconductor Devices, Ltd. and also includes its majority-owned subsidiaries.
- (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).

M8E 00.4-0110

#### Caution

GaAs Products

This product uses gallium arsenide (GaAs).

GaAs vapor and powder are hazardous to human health if inhaled or ingested, so please observe the following points.

- Follow related laws and ordinances when disposing of the product. If there are no applicable laws and/or ordinances, dispose of the product as recommended below.
  - Commission a disposal company able to (with a license to) collect, transport and dispose of materials that contain arsenic and other such industrial waste materials.
- 2. Exclude the product from general industrial waste and household garbage, and ensure that the product is controlled (as industrial waste subject to special control) up until final disposal.
- Do not burn, destroy, cut, crush, or chemically dissolve the product.
- Do not lick the product or in any way allow it to enter the mouth.

#### ▶ For further information, please contact

#### NEC Compound Semiconductor Devices, Ltd. http://www.ncsd.necel.com/

E-mail: salesinfo@ml.ncsd.necel.com (sales and general) techinfo@ml.ncsd.necel.com (technical)

Sales Division TEL: +81-44-435-1573 FAX: +81-44-435-1579

#### **NEC Compound Semiconductor Devices Hong Kong Limited**

E-mail: ncsd-hk@elhk.nec.com.hk (sales, technical and general)

Hong Kong Head Office TEL: +852-3107-7303 FAX: +852-3107-7309
Taipei Branch Office TEL: +886-2-8712-0478 FAX: +886-2-2545-3859
Korea Branch Office TEL: +82-2-558-2120 FAX: +82-2-558-5209

#### NEC Electronics (Europe) GmbH http://www.ee.nec.de/

TEL: +49-211-6503-0 FAX: +49-211-6503-1327

#### California Eastern Laboratories, Inc. http://www.cel.com/

TEL: +1-408-988-3500 FAX: +1-408-988-0279