

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








# **PS30**

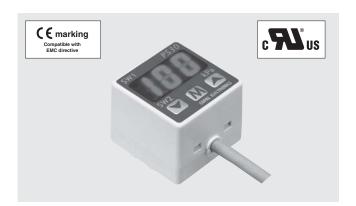

#### **■ FEATURES**

- Optimum for pneumatic equipment and semiconductor manufacturing equipment
- Larger size display and high luminance LED for best visibility
- Eight switch output modes
- Low consumption by nondisplay mode

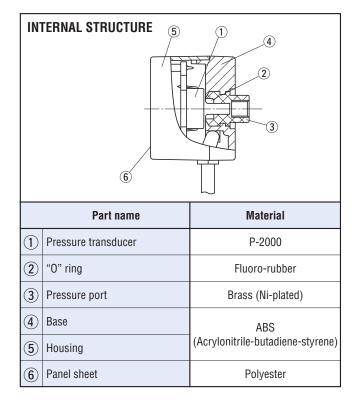

#### **■ MODEL NUMBER DESIGNATION**

PS30-102R-N

Series name

Switch output interface
N: NPN open collector
P: PNP open collector

102R: -100 ~ 100 kPa 103R: -0.1 MPa ~ 1.00 MPa

#### ■ LIST OF MODEL NUMBERS

Pressure reference	Gai	uge
Switch output   Rated pressure range	−100 ~ 100 kPa	−100 ~ 1000 kPa
NPN	PS30-102R-N	PS30-103R-N
PNP	PS30-102R-P	PS30-103R-P

**\*Please refer to the LIST OF MODEL NUMBERS when placing orders.** 

# PRESSURE SWITCHES WITH GAUGE

### ■ STANDARD SPECIFICATIONS

• Unless otherwise specified, the specs are defined at an ambient temperature of 25 ± 5 °C and excitation voltage of 24 V DC.

	ltem Model number –		P\$30			
			102R	103R		
	Pressure reference		Gauge			
	Rated pressure range	kPa	− 100 ~ 100	<b>– 100 ~ 1000</b>		
	Maximum pressure kPa		200	1500		
	Break-down pressure	kPa	500	2000		
ons	Operating temp. range °C		− 10 ~ 50			
cati	Compensated temp. range	°C	0 ~	50		
ecifi	Thermal error		±3 %F.S. (	0 ~ 50 °C)		
General specifications	Operating humidity	%RH	35 ~ 85 (No c	condensation)		
era	Storage temp.	°C	- 20 ~ 70 (Atmospheric pressur	e, humidity 65 %RH maximum)		
Gen	Pressure medium		Non-corro	sive gases		
	Insulation resistance	$M\Omega$ minimum	100 (DC	500 V)		
	Dielectric strength		500 V AC, 60 s (Leakage current 1 mA maximum)			
	Pressure port		M5 female screw, "0" ring groove (P8)			
	Net weight g		Approx. 60 (Inclu	Approx. 60 (Including 1.5 m cable)		
Power	Supply voltage V DC		$12 \sim 24 \text{ V} \pm 10 \%$ (Including ripple voltage)			
Po	Consumption current mA maximum		40			
	Display element		LED (2 an	d 1/2 digit)		
la y	Rated display range	kPa	− 100 ~ 100			
Display		MPa		- 0.10 ~ 1.00		
	Display accuracy Resolution			± 1 %F.S.		
	No. of outputs		1 count 2			
	Output interface		Open collector output (NPN or PNP)			
=				Output 1 (SW1), Output 2 (SW2) Light on when output is ON.		
utb	Repeatability %F.S.		± 0.3 maximum			
Switch output	Switch hysteresis	70Г.З.				
wit	Switching capacity		0 ~ 30 counts (Adjustable)  30 V DC 100 mA maximum Short-circuit protection			
S	Residual voltage	V maximum	1.2 V (NPN), 2.2 V (PNP)			
	Response ms		Approx 5, 25, 250 (Adjustable)			
	neshouse	IIIS	Appi 0x 5, 25, 25	บ (คนานจเสมเซ)		

#### ■ ENVIRONMENTAL CHARACTERISTICS


Test item	Test conditions	Permissible change	
Vibration	10 ~ 500 Hz, 98.1 m/s² or 1.5 mm P-P, 3 directions for 2 hours each		
Shock	490 m/s², 3 directions for 3 times each	± 2 %F.S. maximum after test	
Pressure cycling	0 ~ Rated pressure、10 <sup>s</sup> cycles	<b>※</b> 1	
Moisture resistance	40 °C, 90 ~ 95 %RH, 240 hrs.		
EMC	EMI : EN55011: 2007, A2 : 2007 Group 1, class B EMS : EN61326-1 : 2006 Table 2	Switch operating pressure : $\pm$ 5 %F.S., maximum during tset $\approxeq$ 1	

X 1 Change in the pressure indication, switch operating points.

## PRESSURE SWITCHES WITH GAUGE

#### OUTLINE DIMENSIONS


Unless otherwise specified, tolerance :  $\pm$  0.5 (Unit : mm)

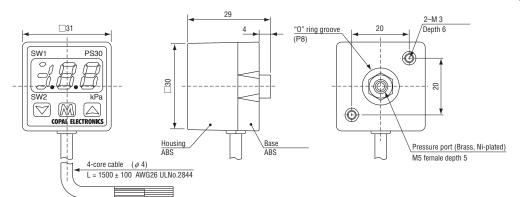


P\$30				
Wire color	Connection			
Brown	Power +			
Black	Switch output 1			
White	Switch output 2			
Blue	Common			

#### **■ INTERNAL ELECTRICAL SCHEMATICS**

#### NPN

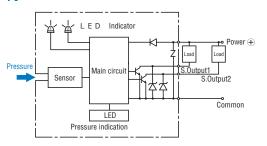



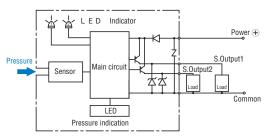

#### ■ SELECTION OF DISPLAY MULTIPLIER

Please refer to the right list.

(Note) Diagonal column : No unit can be selected due to resolution and number of digits.

Selection	Selection 102		103R		
number	Display multiplier	Display range	Display multiplier	Display range	
0	×1	<b>−100 ~ 100</b>			
1			×1	<b>−0.10 ~ 1.00</b>	
2	×0.75	<b>−75 ~ 75</b>			
3	×0.01	<b>−1.00 ~ 1.00</b>	×10	<b>−1.0 ~ 10.0</b>	
4	×0.145	-14.5 ~ 14.5	×145	−14 ~ 145	

#### SWITCH OUTPUT MODE

Out	put	SW 1		SW 2					
Мо	ode	Sepa	Separate Window comparator		Separate		Window comparator		
Oper	ation	HI	LO	А	В	HI	L0	Α	В
	0	0						0	
er	1	0						0	
g	2		0					0	
2	3		0					0	
l ë	4			0					0
Selection number	5			0					0
Se	6				0				0
	7				0				0
		Setti Not		Lower limit Upper limit Not	: Setting 1	Setti No		Upper limi	t : Setting 1 t : Setting 1 te 2

Separate mode	Window comparator mode	
(HI operation)  OFF P1: SW1 P2: SW2  -Pr P1: SW1 P7: SW2	ON OFF P2 -Pr H P2 -Pr H P7	
(LO operation)  ON P1: SW1 P2: SW2 OFF  -Pr H Pr	(B operation)  OFF P1 P2 OFF  Pr HP Pr	
P1≦P2 or P1≧P2 P1 : Setting 1、P2 : Setting 2 H : Switch hysteresis	P1≦P2+2H	


(Note 1) In the Separte Mode, setting 1 corresponds to SW1, and Setting 2 corresponds to SW2.

(Note 2) In the Window Comparator Mode, the minimum value for SW1 and SW2 corresponds to Setting 1 and the maximum value corresponds to Setting 2.

## PRESSURE SWITCHES WITH GAUGE


# ■ HOW TO MOUNT OPTIONAL ACCESSORIES (Sold separately)

#### Port block




Material : Zink die-casting / nickel plate

#### ●How to mount port block




#### Rear panel mounting bracket


#### Panel mounting bracket

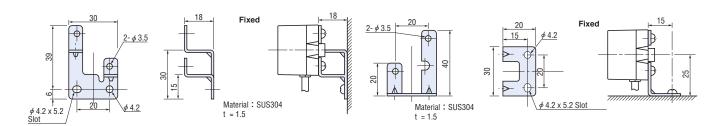

#### Panel mounting bracket (Option)

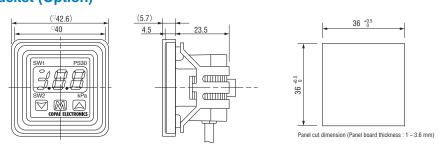

#### • How to mount panel holder cover set

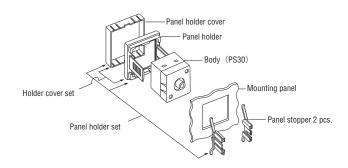

Name	Description	Contents	
ACPG-001	Rear panel bracket set	Rear panel bracket and M3 x 4 male screw (2 pcs.)	
ACPG-002	Panel bracket set	Panel bracket and M3 x 4 male screw (2 pcs.)	
ACPG-003	Panel holder set	Panel holder cover Panel holder Panel stopper (2 pcs.)	
ACPG-004	Holder cover set (For protecting operating panel)	Panel holder cover Panel holder	
ACPG-005	Port block	Port block "0" ring (P8) M3 x 10 Male screw 2 pcs. Seal screw 1 pc.	