# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





## PHOTOCOUPLER PS9122

## 1 Mbps OPEN COLLECTOR OUTPUT TYPE 5-PIN SOP (SO-5) HIGH-SPEED PHOTOCOUPLER

-NEPOC Series-

#### DESCRIPTION

The PS9122 is an optical coupled high-speed, active low type isolator containing a GaAlAs LED on the input side and a photodiode and a signal processing circuit on the output side on one chip.

The PS9122 is a high-speed digital output type photocoupler designed specifically for low circuit current.


The PS9122 is in 5-pin plastic SOP (Small Outline Package) and is suitable for high density application.

#### FEATURES

- Supply Voltage
  - N rank: Vcc = 3.3 V
  - L rank: Vcc = 5 V
- Pulse width distortion (|tphl tplh| = 200 ns MAX.)
- Small package (SO-5)
- High-speed (1 Mbps)
- High isolation voltage (BV = 3 750 Vr.m.s.)
- Open collector output
- Embossed tape product: PS9122-F3: 2 500 pcs/reel
- Pb-Free product
- Safety standards
  - UL approved: File No. E72422
  - DIN EN60747-5-2 (VDE0884 Part2) approved No.40008902 (option)

#### APPLICATIONS

- PoE (Power over Ethernet)
- Measurement equipment
- FA Network



## TRUTH TABLE


LED	Output
ON	L
OFF	Н

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

Document No. PN10697EJ02V0DS (2nd edition) Date Published March 2010 NS

The mark  $\star$  shows major revised points.


## PACKAGE DIMENSIONS (UNIT: mm)

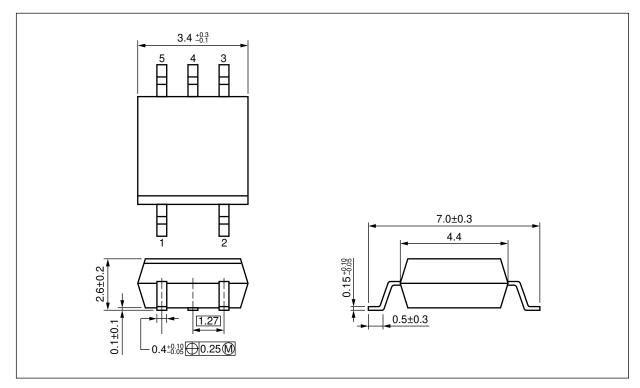

## **\*** PHOTOCOUPLER CONSTRUCTION

Parameter	Unit (MIN.)
Air Distance	4.2 mm
Outer Creepage Distance	4.2 mm
Isolation Distance	0.2 mm

#### **\*** MARKING EXAMPLE



#### **\*** ORDERING INFORMATION

Part Number	Order Number	Rank	Solder Plating Specification	Packing Style	Safety Standards Approval	Application *1 Part Number
PS9122	PS9122-AX	N <sup>*2</sup> L <sup>*3</sup>	Pb-Free (Ni/Pd/Au)	20 pcs (Tape 20 pcs cut)	Standard products (UL approved)	PS9122
PS9122-F3	PS9122-F3-AX	N <sup>*2</sup> L <sup>*3</sup>		Embossed Tape 2 500 pcs/reel		
PS9122-V	PS9122-V-AX	N <sup>*2</sup> L <sup>*3</sup>		20 pcs (Tape 20 pcs cut)	DIN EN60747-5-2 (VDE0884 Part2)	
PS9122-V-F3	PS9122-V-F3-AX	N <sup>*2</sup> L <sup>*3</sup>		Embossed Tape 2 500 pcs/reel	approved (Option)	

\*1 For the application of the Safety Standard, following part number should be used.

\*2 N rank: Vcc = 3.3 V

\*3 L rank: Vcc = 5 V

## ABSOLUTE MAXIMUM RATINGS (TA = 25°C, unless otherwise specified)

	Parameter	Symbol	Ratings	Unit
Diode	Forward Current <sup>*1</sup>	lF	25	mA
	Reverse Voltage	VR	5	V
Detector	Supply Voltage	Vcc	7	V
	Output Voltage	Vo	7	V
	Output Current	lo	20	mA
	Power Dissipation <sup>*2</sup>	Pc	40	mW
Isolation	Voltage <sup>*3</sup>	BV	3 750	Vr.m.s.
Operating	Operating Ambient Temperature		-40 to +100	°C
Storage	Storage Temperature		-55 to +125	°C

- \* **\*1** Reduced to 0.17 mA/°C at  $T_A = 25$ °C or more.
  - \*2 Applies to output pin Vo (collector pin). Reduced to 1.5 mW/°C at  $T_A = 80^{\circ}C$  or more.
    - \*3 AC voltage for 1 minute at  $T_A = 25^{\circ}$ C, RH = 60% between input and output. Pins 1-2 shorted together, 3-5 shorted together.

#### **RECOMMENDED OPERATING CONDITIONS**


Parameter		Symbol	MIN.	TYP.	MAX.	Unit
Low Level Input Voltage	Low Level Input Voltage		0		0.8	V
High Level Input Current		Ігн	6.3	10	12.5	mA
Supply Voltage	N rank	Vcc	2.7	3.3	3.6	V
	L rank		4.5	5.0	5.5	
TTL (R∟ = 1 kΩ, loads)		N			3	
Pull-up Resistor		R∟	330		4 k	Ω

#### **\*** DRIVER CIRCUIT

\*

\*

It is recommended to use some buffer for low output current controller, especially in the case of low Vcc, otherwise to confirm that enough input current is supplied from controller.




	Parameter	Symbol	Conditions	MIN.	TYP.*1	MAX.	Uni
Diode	Forward Voltage	VF	IF = 10 mA, TA = 25°C		1.6	1.8	V
	Reverse Current	IR	Vr = 3 V, Ta = 25°C			10	μA
	Terminal Capacitance	Ct	V = 0 V, f = 1 MHz, T <sub>A</sub> = 25°C		30		pF
Detector	High Level Output Current	Іон	Vcc = Vo = 3.3 V, VF = 0.8 V		1	100	μA
	Low Level Output Voltage <sup>*2</sup>	Vol	Vcc = 3.3 V, I⊧ = 5 mA, Io∟ = 10 mA		0.2	0.6	V
	High Level Supply Current	Іссн	$V_{CC} = 3.3 V$ , $I_F = 0 mA$ , $V_O = Open$			2	m/
	Low Level Supply Current	lcc∟	$V_{CC} = 3.3 \text{ V}, \text{ I}_F = 10 \text{ mA}, \text{ V}_O = \text{Open}$			3	
Coupled	Threshold Input Current $(H \rightarrow L)$	IFHL	Vcc = 3.3 V, Vo = 0.8 V, RL = 350 $\Omega$		2	5	m/
	Isolation Resistance	R⊦o	V⊦o = 1 kVbc, RH = 40 to 60%, T <sub>A</sub> = 25°C	10 <sup>11</sup>			Ω
	Isolation Capacitance	CI-O	V = 0 V, f = 1 MHz, T <sub>A</sub> = 25°C		0.6		pF
	Propagation Delay Time $(H \rightarrow L)^{*3}$	tph∟	$\label{eq:Vcc} \begin{array}{l} {\sf V}_{\rm CC} = 3.3 \; {\sf V}, \; {\sf R}_{\rm L} = 350 \; \Omega, \; {\sf I}_{\rm F} = 7.5 \; {\sf m}{\sf A}, \\ {\sf V}_{\rm THHL} = {\sf V}_{\rm THLH} = 1.5 \; {\sf V} \end{array}$			500	ns
	Propagation Delay Time $(L \rightarrow H)^{*3}$	tplh				700	
	Rise Time	tr			60		ns
	Fall Time	tr			70		
	Pulse Width Distortion (PWD) <sup>*3</sup>	tphl-tplh				200	ns
	Common Mode Transient Immunity at High Level Output <sup>*4</sup>	СМн	$\label{eq:Vcc} \begin{array}{l} V_{CC} = 3.3 \ V, \ R_L = 350 \ \Omega, \ T_A = 25^{\circ}C, \\ I_F = 0 \ mA, \ V_O > 2.0 \ V, \ V_{CM} = 1.0 \ kV \end{array}$	15	20		kV/,
	Common Mode Transient Immunity at Low Level Output <sup>*4</sup>	CM∟	$\label{eq:Vcc} \begin{array}{l} V_{CC} = 3.3 \ V, \ R_L = 350 \ \Omega, \ T_A = 25^{\circ}C, \\ I_F = 7.5 \ mA, \ V_O < 0.8 \ V, \ V_{CM} = 1.0 \ kV \end{array}$	15	20		

## ELECTRICAL CHARACTERISTICS 1: N rank (TA = -40 to +100°C, unless otherwise specified)

	Parameter	Symbol	Conditions	MIN.	TYP. <sup>*₅</sup>	MAX.	Un
Diode	Forward Voltage	VF	IF = 10 mA, TA = 25°C		1.6	1.8	V
	Reverse Current	IR	Vr = 3 V, Ta = 25°C			10	μ
	Terminal Capacitance	Ct	$V = 0 V, f = 1 MHz, T_A = 25^{\circ}C$		30		р
Detector	High Level Output Current	Іон	$V_{CC} = V_{O} = 5 V, V_{F} = 0.8 V$		1	100	μ
	Low Level Output Voltage*6	Vol	Vcc = 5 V, I⊧ = 5 mA, Io∟ = 13 mA		0.2	0.6	١
	High Level Supply Current	Іссн	$V_{CC} = 5 V$ , $I_F = 0 mA$ , $V_0 = Open$			2.5	m
	Low Level Supply Current	lcc∟	$V_{CC} = 5 \text{ V}, \text{ I}_F = 10 \text{ mA}, \text{ Vo} = \text{Open}$			3.5	
Coupled	Threshold Input Current $(H \rightarrow L)$	Ifhl	Vcc = 5 V, Vo = 0.8 V, RL = 350 $\Omega$		2	5	m
	Isolation Resistance	R⊦o	V⊦o = 1 kVbc, RH = 40 to 60%, T <sub>A</sub> = 25°C	10 <sup>11</sup>			2
	Isolation Capacitance	CI-0	V = 0 V, f = 1 MHz, T <sub>A</sub> = 25°C		0.6		р
	Propagation Delay Time $(H \rightarrow L)^{27}$	tрнL	$\label{eq:Vcc} \begin{array}{l} V_{\text{CC}} = 5 \; V, \; R_{\text{L}} = 350 \; \Omega, \; I_{\text{F}} = 7.5 \; \text{mA}, \\ V_{\text{THHL}} = \; V_{\text{THLH}} = 1.5 \; V \end{array}$			500	n
	Propagation Delay Time $(L \rightarrow H)^{27}$	tрін				700	
	Rise Time	tr			60		n
	Fall Time	tr			70		
	Pulse Width Distortion (PWD) <sup>*7</sup>	tphl-tplh				200	n
	Common Mode Transient Immunity at High Level Output <sup>*8</sup>	СМн	$\label{eq:Vcc} \begin{array}{l} V_{CC} = 5 \ V, \ R_L = 350 \ \Omega, \ T_A = 25^\circ C, \\ I_F = 0 \ mA, \ V_O > 2.0 \ V, \ V_{CM} = 1.0 \ kV \end{array}$	15	20		kV
	Common Mode Transient Immunity at Low Level Output <sup>*8</sup>	CM∟	$\label{eq:Vcc} \begin{array}{l} V_{CC} = 5 \ V, \ R_L = 350 \ \Omega, \ T_A = 25^\circ C, \\ I_F = 7.5 \ mA, \ V_O < 0.8 \ V, \ V_{CM} = 1.0 \ kV \end{array}$	15	20		


## ELECTRICAL CHARACTERISTICS 2: L rank (T<sub>A</sub> = -40 to +100°C, unless otherwise specified)

- **\*1, 5.** Typical values at  $T_A = 25^{\circ}C$
- \*2, 6. Because VoL of 2 V or more may be output when LED current input and when output supply of Vcc = 2 V more or less, it is important to confirm the characteristics (operation with the power supply on and off) during design, before using this device.
- \* \*3, 7. Test circuit for propagation delay time

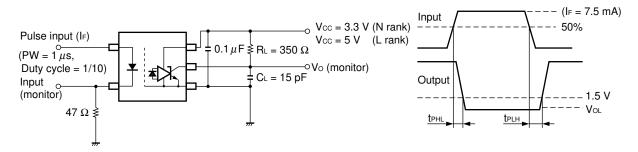

Remark CL includes probe and stray wiring capacitance.

\* \*4, 8. Test circuit for common mode transient immunity

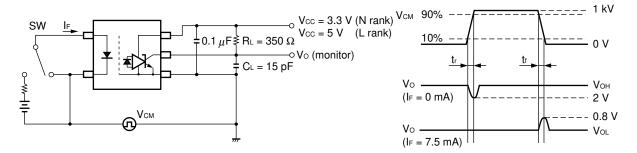


**Remark** C<sub>L</sub> includes probe and stray wiring capacitance.


#### **\*** USAGE CAUTIONS

- 1. This product is weak for static electricity by designed with high-speed integrated circuit so protect against static electricity when handling.
- 2. By-pass capacitor of 0.1  $\mu$ F is used between Vcc and GND near device. Also, ensure that the distance between the leads of the photocoupler and capacitor is no more than 10 mm.
- 3. Avoid storage at a high temperature and high humidity.


## TYPICAL CHARACTERISTICS (T<sub>A</sub> = 25°C, unless otherwise specified)

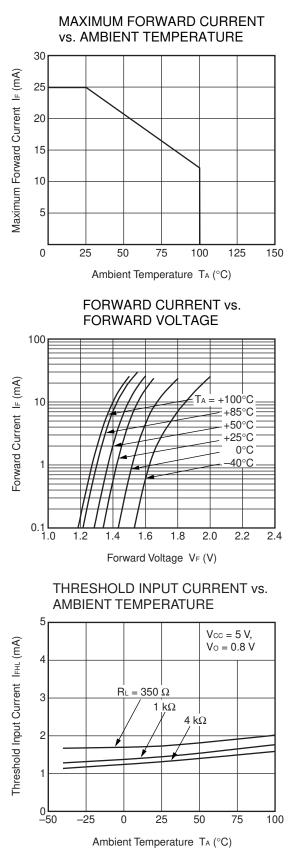






THRESHOLD INPUT CURRENT vs. AMBIENT TEMPERATURE




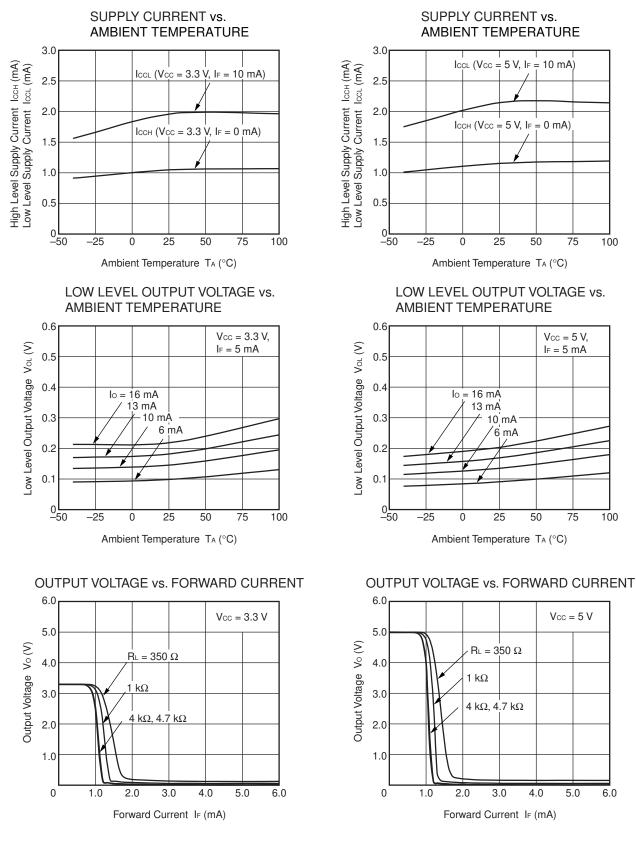

Remark The graphs indicate nominal characteristics.

Vcc = 5 V,

IF = 7.5 mA

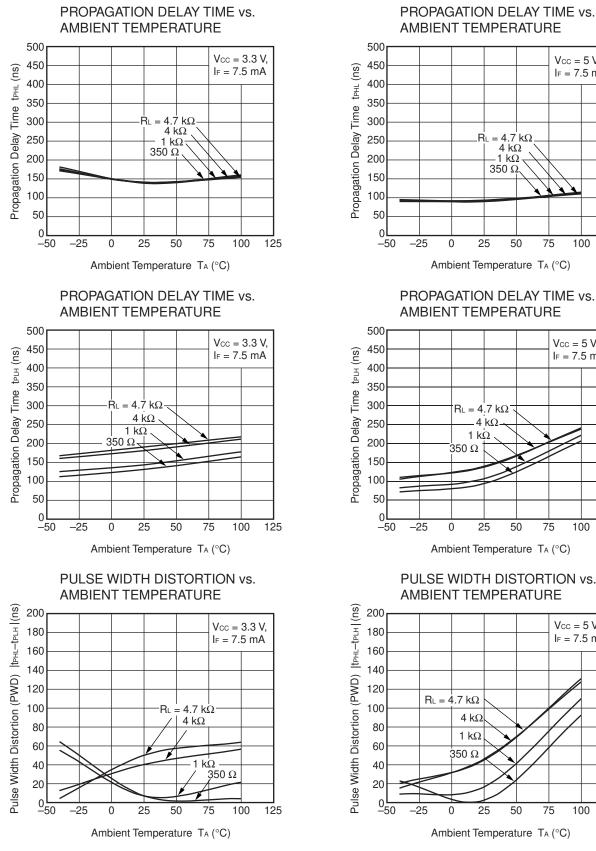

**Remark** The graphs indicate nominal characteristics.

Data Sheet PN10697EJ02V0DS

10

= 4.7 kΩ

 $4 \text{ k}\Omega$ 

1 kΩ 350 Ω

50

50

50

75

100

125

75

100

Vcc = 5 V.

I⊧ = 7.5 mA

125

75

100


Vcc = 5 V,

IF = 7.5 mA

125

125


125

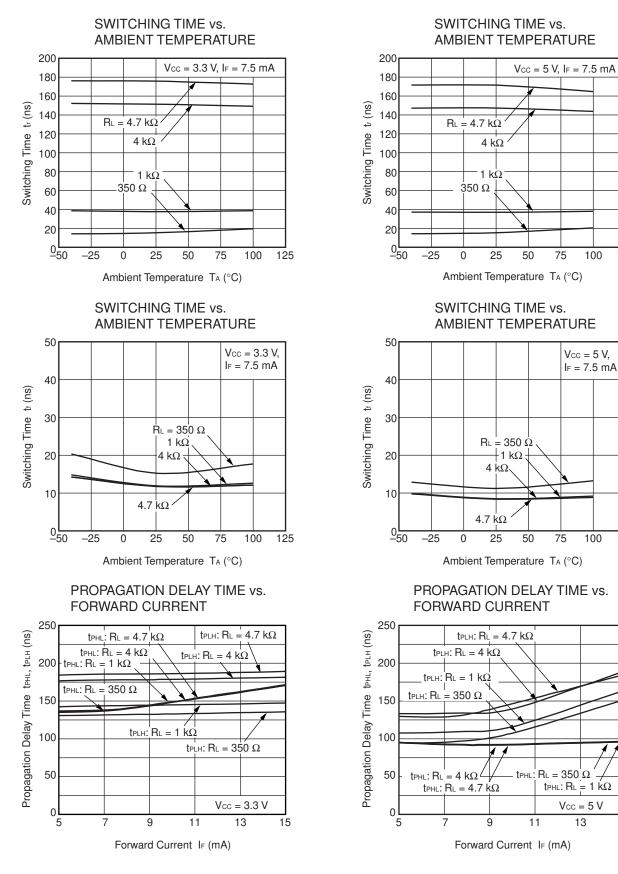


Remark The graphs indicate nominal characteristics.

15

## TAPING SPECIFICATIONS (UNIT: mm)

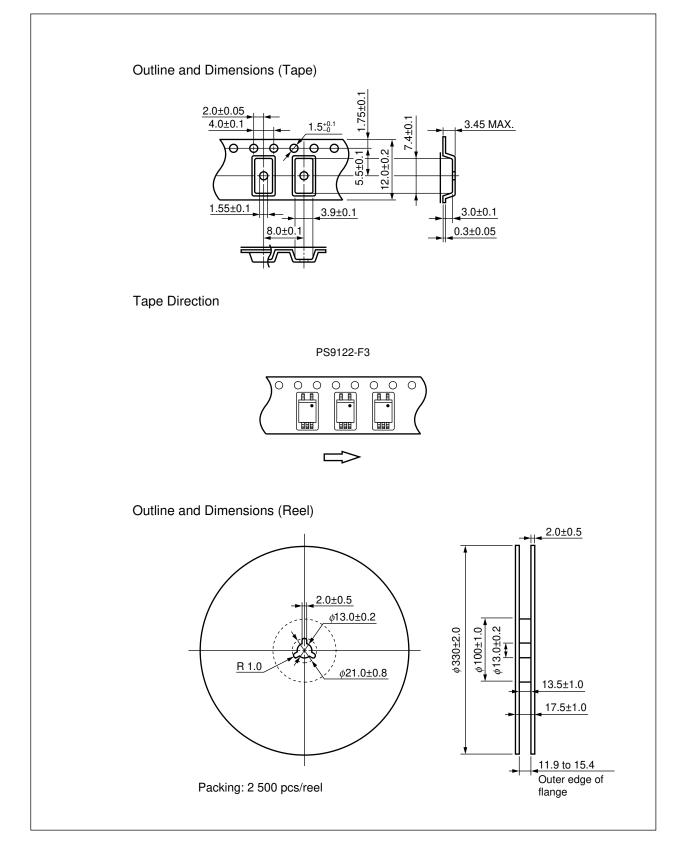

## \* RECOMMENDED MOUNT PAD DIMENSIONS (UNIT: mm)

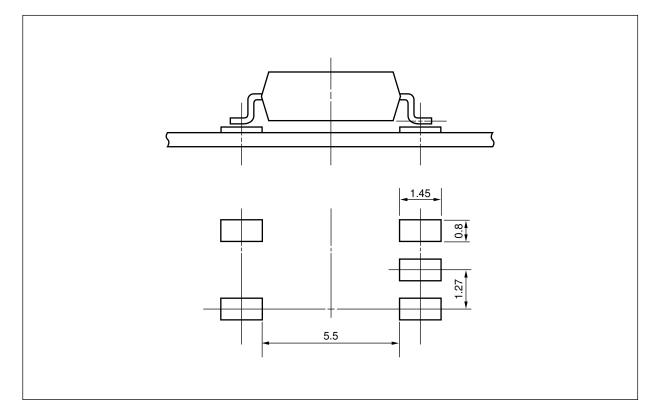

## NOTES ON HANDLING


#### 1. Recommended soldering conditions

#### (1) Infrared reflow soldering

- · Peak reflow temperature
- Time of peak reflow temperature
- Time of temperature higher than 220°C
- Time to preheat temperature from 120 to 180°C
- Number of reflows
- Flux

260°C or below (package surface temperature) 10 seconds or less 60 seconds or less 120±30 s Three Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

#### Recommended Temperature Profile of Infrared Reflow

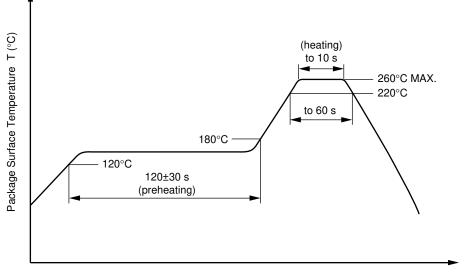

Time (s)

#### (2) Wave soldering

- Temperature 260°C or below (molten solder temperature)
- Time 10 seconds or less
- Preheating conditions 120°C or below (package surface temperature)
- Number of times
   One (Allowed to be dipped in solder including plastic mold portion.)
- Flux Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

#### (3) Soldering by Soldering Iron

Peak Temperature (lead part temperature) 350°C or below
 Time (each pins) 3 seconds or less
 Flux Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

(a) Soldering of leads should be made at the point 1.5 to 2.0 mm from the root of the lead

(b) Please be sure that the temperature of the package would not be heated over  $100^\circ\text{C}$ 

#### (4) Cautions

#### Fluxes

Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.

#### 2. Cautions regarding noise

Be aware that when voltage is applied suddenly between the photocoupler's input and output or between collector-emitters at startup, the output transistor may enter the on state, even if the voltage is within the absolute maximum ratings.

## \* SPECIFICATION OF VDE MARKS LICENSE DOCUMENT

Parameter	Symbol	Speck	Unit
Climatic test class (IEC 60068-1/DIN EN 60068-1)		40/100/21	
Dielectric strength maximum operating isolation voltage Test voltage (partial discharge test, procedure a for type test and random test) $U_{pr} = 1.5 \times U_{IORM}, P_d < 5 pC$	Uiorm Upr	707 1 061	V <sub>peak</sub> V <sub>peak</sub>
Test voltage (partial discharge test, procedure b for all devices) $U_{\text{pr}}$ = 1.875 $\times$ U_{IORM}, $P_{\text{d}}$ < 5 pC	Upr	1 326	$V_{\text{peak}}$
Highest permissible overvoltage	Utr	6 000	Vpeak
Degree of pollution (DIN EN 60664-1 VDE0110 Part 1)		2	
Comparative tracking index (IEC 60112/DIN EN 60112 (VDE 0303 Part 11))	CTI	175	
Material group (DIN EN 60664-1 VDE0110 Part 1)		lll a	
Storage temperature range	Tstg	-55 to +125	°C
Operating temperature range	TA	-40 to +100	°C
Isolation resistance, minimum value $V_{IO} = 500 \text{ V dc at } T_A = 25^{\circ}\text{C}$ $V_{IO} = 500 \text{ V dc at } T_A MAX. at least 100^{\circ}\text{C}$	Ris MIN. Ris MIN.	10 <sup>12</sup> 10 <sup>11</sup>	Ω Ω
Safety maximum ratings (maximum permissible in case of fault, see thermal derating curve) Package temperature Current (input current IF, Psi = 0) Power (output or total power dissipation) Isolation resistance	Tsi Isi Psi	150 200 300	°C mA mW
$V_{IO} = 500 \text{ V dc at } T_A = Tsi$	Ris MIN.	10 <sup>9</sup>	Ω

• The information in this document is current as of March, 2010. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets, etc., for the most up-to-date specifications of NEC Electronics products. Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.

• No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may appear in this document.

- NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of a customer's equipment shall be done under the full responsibility of the customer. NEC Electronics assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC Electronics endeavors to enhance the quality and safety of NEC Electronics products, customers
  agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. In addition, NEC
  Electronics products are not taken measures to prevent radioactive rays in the product design. When customers
  use NEC Electronics products with their products, customers shall, on their own responsibility, incorporate
  sufficient safety measures such as redundancy, fire-containment and anti-failure features to their products in
  order to avoid risks of the damages to property (including public or social property) or injury (including death) to
  persons, as the result of defects of NEC Electronics products.
- NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and "Specific".

The "Specific" quality grade applies only to NEC Electronics products developed based on a customerdesignated "quality assurance program" for a specific application. The recommended applications of an NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application.

- "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots.
- "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support).
- "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact an NEC Electronics sales representative in advance to determine NEC Electronics' willingness to support a given application.

(Note)

- "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries.
- (2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).

M8E0904E

Caution GaAs Products	This product uses gallium arsenide (GaAs). GaAs vapor and powder are hazardous to human health if inhaled or ingested, so please observe the following points.
	• Follow related laws and ordinances when disposing of the product. If there are no applicable laws and/or ordinances, dispose of the product as recommended below.
	<ol> <li>Commission a disposal company able to (with a license to) collect, transport and dispose of materials that contain arsenic and other such industrial waste materials.</li> </ol>
	<ol><li>Exclude the product from general industrial waste and household garbage, and ensure that the product is controlled (as industrial waste subject to special control) up until final disposal.</li></ol>
	• Do not burn, destroy, cut, crush, or chemically dissolve the product.
	Do not lick the product or in any way allow it to enter the mouth.