imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ne<mark>x</mark>peria

Important notice

Dear Customer,

On 7 February 2017 the former NXP Standard Product business became a new company with the tradename **Nexperia**. Nexperia is an industry leading supplier of Discrete, Logic and PowerMOS semiconductors with its focus on the automotive, industrial, computing, consumer and wearable application markets

In data sheets and application notes which still contain NXP or Philips Semiconductors references, use the references to Nexperia, as shown below.

Instead of <u>http://www.nxp.com</u>, <u>http://www.philips.com/</u> or <u>http://www.semiconductors.philips.com/</u>, use <u>http://www.nexperia.com</u>

Instead of sales.addresses@www.nxp.com or sales.addresses@www.semiconductors.philips.com, use **salesaddresses@nexperia.com** (email)

Replace the copyright notice at the bottom of each page or elsewhere in the document, depending on the version, as shown below:

- © NXP N.V. (year). All rights reserved or © Koninklijke Philips Electronics N.V. (year). All rights reserved

Should be replaced with:

- © Nexperia B.V. (year). All rights reserved.

If you have any questions related to the data sheet, please contact our nearest sales office via e-mail or telephone (details via **salesaddresses@nexperia.com**). Thank you for your cooperation and understanding,

Kind regards,

Team Nexperia



600 W Transient Voltage Suppressor Rev. 2 — 6 January 2011

Product data sheet

1. **Product profile**

1.1 General description

600 W unidirectional Transient Voltage Suppressor (TVS) in a SOD128 small and flat lead Surface-Mounted Device (SMD) plastic package, designed for transient overvoltage protection.

1.2 Features and benefits

- Rated peak pulse power: P_{PPM} = 600 W Very low package height: 1 mm
- Reverse standoff voltage range: V_{RWM} = 3.3 V to 64 V
- Reverse current: I_{RM} = 0.001 μA

1.3 Applications

- Power supply protection
- Automotive application
- Industrial application
- Power management

1.4 Quick reference data

Table 1. Quick reference data

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
P _{PPM}	rated peak pulse power		<u>[1]</u> _	-	600	W
V _{RWM}	reverse standoff voltage		3.3	-	64	V

[1] In accordance with IEC 61643-321 (10/1000 μs current waveform).

- Small plastic package suitable for surface-mounted design
- AEC-Q101 qualified



600 W Transient Voltage Suppressor

2. Pinning information

Table 2.	Pinning		
Pin	Description	Simplified outline	Graphic symbol
1	cathode	[1]	
2	anode	1	1 🛃 2
			sym035

[1] The marking bar indicates the cathode.

3. Ordering information

Table 3. Ordering i	nformation		
Type number ^[1]			
	Name	Description	Version
PTVSxP1UP series	-	plastic surface-mounted package; 2 leads	SOD128

[1] The series consists of 35 types with reverse standoff voltages from 3.3 V to 64 V.

4. Marking

Table 4. **Marking codes** Type number Marking code Type number Marking code PTVS3V3P1UP PTVS20VP1UP AJ B3 PTVS5V0P1UP AK PTVS22VP1UP Β4 PTVS6V0P1UP AL PTVS24VP1UP B5 PTVS6V5P1UP PTVS26VP1UP AM B6 PTVS7V0P1UP PTVS28VP1UP B7 AN PTVS7V5P1UP AP PTVS30VP1UP B8 PTVS8V0P1UP AQ PTVS33VP1UP B9 PTVS36VP1UP PTVS8V5P1UP AR ΒA PTVS9V0P1UP AS PTVS40VP1UP BΒ PTVS10VP1UP AT PTVS43VP1UP BC ΒD PTVS45VP1UP PTVS11VP1UP AU PTVS12VP1UP AV PTVS48VP1UP BE PTVS13VP1UP AW PTVS51VP1UP BF PTVS54VP1UP PTVS14VP1UP AX ΒG PTVS15VP1UP AY PTVS58VP1UP ΒH PTVS16VP1UP ΑZ PTVS60VP1UP ΒJ PTVS64VP1UP PTVS17VP1UP Β1 ΒK PTVS18VP1UP B2 _

5. Limiting values

Table 5. Limiting values In accordance with the Absolute Maximum Rating System (IEC 60134).										
Symbol	Parameter	Conditions	Min	Max	Unit					
P _{PPM}	rated peak pulse power		<u>[1]</u> -	600	W					
I _{PPM}	rated peak pulse current		[1] -	see <u>Table 9</u> and <u>10</u>						
I _{FSM}	Non-repetitive peak forward current	single half-sine wave; t _p = 8.3 ms	-	100	A					
Tj	junction temperature		-	150	°C					
T _{amb}	ambient temperature		-55	+150	°C					
T _{stg}	storage temperature		-65	+150	°C					

[1] In accordance with IEC 61643-321 (10/1000 μ s current waveform).

Table 6. ESD maximum ratings

 $T_{amb} = 25$ °C unless otherwise specified.

Symbol	Parameter	Conditions		Min	Max	Unit
Per diode						
V _{ESD}	electrostatic discharge voltage	IEC 61000-4-2 (contact discharge)	<u>[1][2]</u>	-	30	kV

[1] Device stressed with ten non-repetitive ElectroStatic Discharge (ESD) pulses.

[2] Soldering point of cathode tab.

Table 7. ESD standards compliance

Standard	Conditions
Per diode	
IEC 61000-4-2; level 4 (ESD)	> 15 kV (air); > 8 kV (contact)
MIL-STD-883; class 3 (human body model)	> 4 kV

6. Thermal characteristics

Table 8.	Thermal characteristics						
Symbol	Parameter	Conditions	Min	Тур	Max	Unit	
R _{th(j-a)}	thermal resistance from junction to ambient	in free air	[1] -	-	200	K/W	
			[2] _	-	120	K/W	
			[3] _	-	60	K/W	
R _{th(j-sp)}	thermal resistance from junction to solder point		<u>[4]</u> _	-	12	K/W	
[1] Device footpr	e mounted on an FR4 Printed-Circ nt.	cuit Board (PCB), single-	sided copper,	tin-plated	d and sta	ndard	
[2] Device	Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for cathode 1 cm ² .						

[3] Device mounted on a ceramic PCB, Al₂O₃, standard footprint.

[4] Soldering point of cathode tab.

PTVSXP1UP_SER

7. Characteristics

Table 9. Characteristics per type; PTVS3V3P1UP to PTVS7V0P1UP

 $T_i = 25 \ ^{\circ}C$ unless otherwise specified.

Type number	pe number Reverse standoff voltage V _{BR} (V) I _R = 10 mA		age	Reverse leakage current I _{RM} (μΑ) at V _{RWM} (V)		Clamping voltage V _{CL} (V)		
	Мах	Min	Тур	Max	Тур	Max	Max	I _{PPM} (A)
PTVS3V3P1UP	3.3	5.20	5.60	6.00	5	600	8.0	75.0
PTVS5V0P1UP	5.0	6.40	6.70	7.00	5	400	9.2	65.2
PTVS6V0P1UP	6.0	6.67	7.02	7.37	5	400	10.3	58.3
PTVS6V5P1UP	6.5	7.22	7.60	7.98	5	250	11.2	53.6
PTVS7V0P1UP	7.0	7.78	8.20	8.60	3	100	12.0	50.0

Table 10.Characteristics per type; PTVS7V5P1UP to PTVS64VP1UP $T_j = 25$ °C unless otherwise specified.

Type number	Reverse standoff voltage V _{RWM} (V)		Breakdown voltage V _{BR} (V)		Reverse current I _{RM} (μΑ)	leakage	Clamping voltage V _{CL} (V)	
		I _R = 1 mA			at V _{RWM}	(V)		
	Мах	Min	Тур	Max	Тур	Max	Мах	I _{PPM} (A)
PTVS7V5P1UP	7.5	8.33	8.77	9.21	0.2	50	12.9	46.5
PTVS8V0P1UP	8.0	8.89	9.36	9.83	0.03	25	13.6	44.1
PTVS8V5P1UP	8.5	9.44	9.92	10.40	0.01	10	14.4	41.7
PTVS9V0P1UP	9.0	10.00	10.55	11.10	0.005	5	15.4	39.0
PTVS10VP1UP	10	11.10	11.70	12.30	0.005	2.5	17.0	35.3
PTVS11VP1UP	11	12.20	12.85	13.50	0.005	2.5	18.2	33.0
PTVS12VP1UP	12	13.30	14.00	14.70	0.005	2.5	19.9	30.2
PTVS13VP1UP	13	14.40	15.15	15.90	0.001	0.1	21.5	27.9
PTVS14VP1UP	14	15.60	16.40	17.20	0.001	0.1	23.2	25.9
PTVS15VP1UP	15	16.70	17.60	18.50	0.001	0.1	24.4	24.6
PTVS16VP1UP	16	17.80	18.75	19.70	0.001	0.1	26.0	23.1
PTVS17VP1UP	17	18.90	19.90	20.90	0.001	0.1	27.6	21.7
PTVS18VP1UP	18	20.00	21.00	22.10	0.001	0.1	29.2	20.5
PTVS20VP1UP	20	22.20	23.35	24.50	0.001	0.1	32.4	18.5
PTVS22VP1UP	22	24.40	25.60	26.90	0.001	0.1	35.5	16.9
PTVS24VP1UP	24	26.70	28.10	29.50	0.001	0.1	38.9	15.4
PTVS26VP1UP	26	28.90	30.40	31.90	0.001	0.1	42.1	14.3
PTVS28VP1UP	28	31.10	32.80	34.40	0.001	0.1	45.4	13.2
PTVS30VP1UP	30	33.30	35.10	36.80	0.001	0.1	48.4	12.4
PTVS33VP1UP	33	36.70	38.70	40.60	0.001	0.1	53.3	11.3
PTVS36VP1UP	36	40.00	42.10	44.20	0.001	0.1	58.1	10.3
PTVS40VP1UP	40	44.40	46.80	49.10	0.001	0.1	64.5	9.3

PTVSXP1UP_SER

All information provided in this document is subject to legal disclaimers.

600 W Transient Voltage Suppressor


Table 10. Characteristics per type; PTVS7V5P1UP to PTVS64VP1UP ... continued $T_j = 25$ °C unless otherwise specified.

Type number	Reverse standoff voltage	Breakdown voltage V _{BR} (V)		ge	Reverse leakage current		Clamping voltage V _{CL} (V)		
	V _{RWM} (V)				I _{RM} (μΑ)				
		I _R = 1 mA		at V _{RWM} (V)					
	Мах	Min	Тур	Max	Тур	Max	Max	I _{PPM} (A)	
PTVS43VP1UP	43	47.80	50.30	52.80	0.001	0.1	69.4	8.6	
PTVS45VP1UP	45	50.00	52.65	55.30	0.001	0.1	72.7	8.3	
PTVS48VP1UP	48	53.30	56.10	58.90	0.001	0.1	77.4	7.8	
PTVS51VP1UP	51	56.70	59.70	62.70	0.001	0.1	82.4	7.3	
PTVS54VP1UP	54	60.00	63.15	66.30	0.001	0.1	87.1	6.9	
PTVS58VP1UP	58	64.40	67.80	71.20	0.001	0.1	93.6	6.4	
PTVS60VP1UP	60	66.70	70.20	73.70	0.001	0.1	96.8	6.2	
PTVS64VP1UP	64	71.10	74.85	78.60	0.001	0.1	103.0	5.8	


NXP Semiconductors

PTVSxP1UP series

600 W Transient Voltage Suppressor

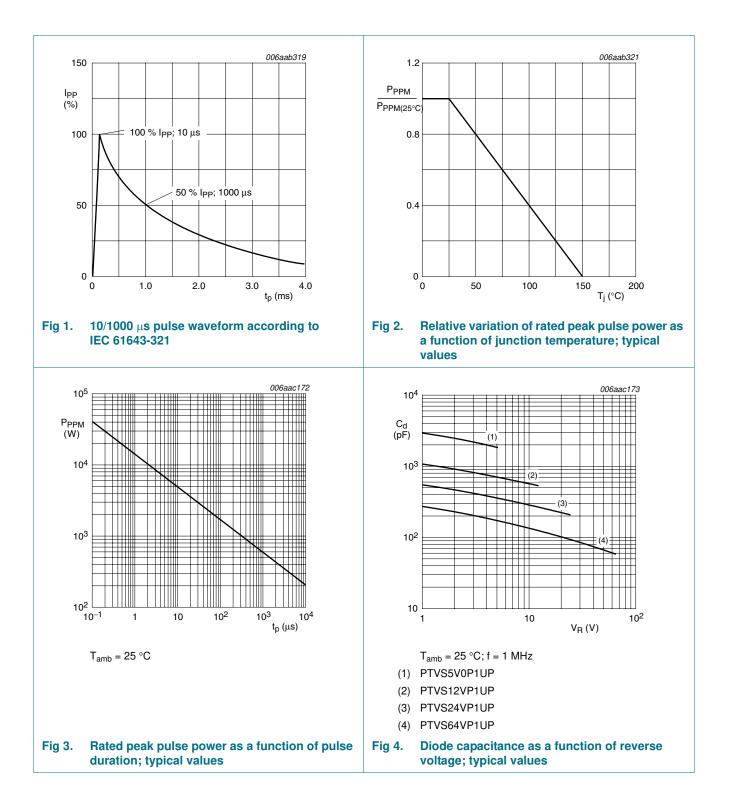

600 W Transient Voltage Suppressor

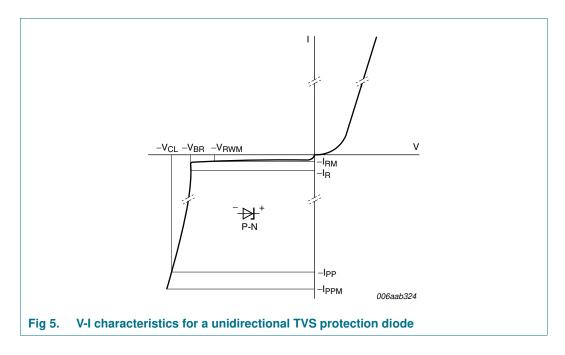


8. Test information

8.1 Quality information

This product has been qualified in accordance with the Automotive Electronics Council (AEC) standard *Q101* - *Stress test qualification for discrete semiconductors*, and is suitable for use in automotive applications.

9. Package outline

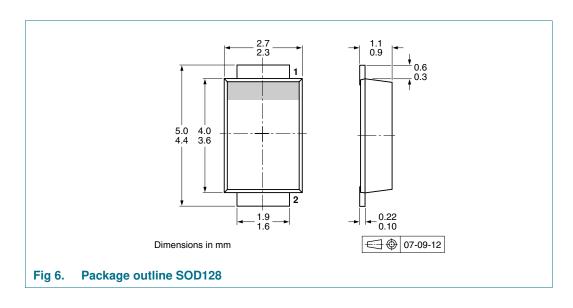

600 W Transient Voltage Suppressor

10. Packing information

Table 11. Packing methods


The indicated -xxx are the last three digits of the 12NC ordering code.[1]

Type number ^[2]	Package	Description	Packing quantity
			3000
PTVSxP1UP series	SOD128	4 mm pitch, 12 mm tape and reel	-115

 $[1] \quad \mbox{For further information and the availability of packing methods, see \underline{Section 14}.$

[2] The series consists of 35 types with reverse standoff voltages from 3.3 V to 64 V.

11. Soldering

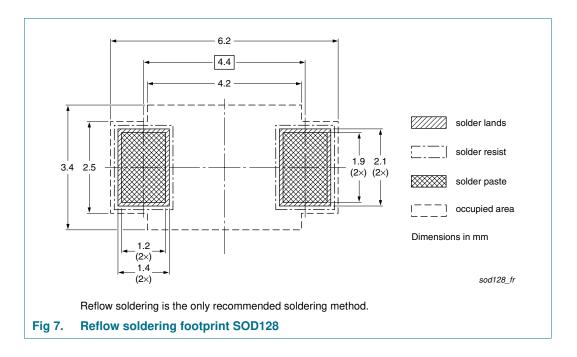

12. Revision history

Table 12. Revision history											
Document ID	Release date	Data sheet status	Change notice	Supersedes							
PTVSXP1UP_SER v.2	20110106	Product data sheet	-	PTVSXP1UP_SER v.1							
Modifications:	Table 6 "ES	D maximum ratings": added.									
	Section 13	Legal information": updated.									
PTVSXP1UP_SER v.1	20100527	Product data sheet	-	-							

PTVSXP1UP_SER

13. Legal information

13.1 Data sheet status

Document status[1][2]	Product status ^[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

13.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

13.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

PTVSXP1UP_SER

All information provided in this document is subject to legal disclaimers.

600 W Transient Voltage Suppressor

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

or legally binding. Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

13.4 Trademarks

14. Contact information

For more information, please visit: http://www.nxp.com

For sales office addresses, please send an email to: salesaddresses@nxp.com

600 W Transient Voltage Suppressor

15. Contents

1	Product profile 1
1.1	General description 1
1.2	Features and benefits 1
1.3	Applications 1
1.4	Quick reference data 1
2	Pinning information 2
3	Ordering information 2
4	Marking 2
5	Limiting values 3
6	Thermal characteristics 3
7	Characteristics 4
8	Test information 7
8.1	Quality information 7
9	Package outline 7
10	Packing information 8
11	Soldering 8
12	Revision history 9
13	Legal information 10
13.1	Data sheet status 10
13.2	Definitions 10
13.3	Disclaimers
13.4	Trademarks 11
14	Contact information 11
15	Contents 12

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP B.V. 2011.

All rights reserved.

For more information, please visit: http://www.nxp.com For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 6 January 2011 Document identifier: PTVSXP1UP_SER