

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China











Specification Control Drawing

a) Part as supplied

QFT*-130/42

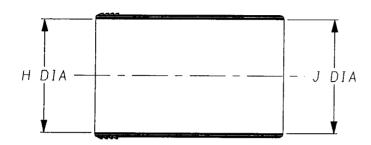

b) Part after unrestricted recovery without clips installed.

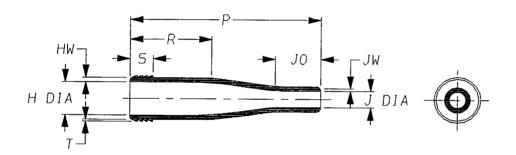

DIMENSIONS (in millimetres).

	Н		J		Р	R	S	Т	JO	HW	JW
Part Number	Min a	Max b	Min a	Max b	±10% b	±10% b	±10% b	±10% b	±10% b	±20% b	±20% b
QFT1	31	9.0	31	4.4	60	25	9.0	0.75	12	1.5	1.0
QFT2	43	14.0	43	7.0	75	32	9.0	0.75	18	1.8	1.0
QFT3	57	24.0	57	12.0	90	35	9.0	0.75	25	1.8	1.8

See over for ordering information

Copyright(!)

The copyright in this drawing is the property of Tyco Electronics UK Ltd. The drawing is issued on the condotion that it is not copied, reproduced or disclosed to a third party, either in whole or in part without the prior written consent of Tyco Electronics UK Ltd.

Drawn A.LILLEY.

Checked

Issue

February 2001 Conforms to 150 Recommendations 3rd Angle Projection

Not to Scale








lss.	Date	E.C.R. No.	Details of Change
1	February 2001	CR01-HM-0001	Size3, JW was 1.0

Ordering Information)

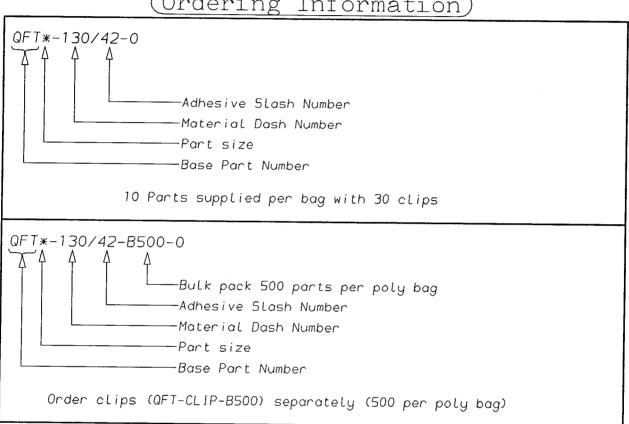

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS, WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

Raychem Wire & Harness a Division of Tyco Electronics Faraday Road, Swindon, Wiltshire, England. SN3 5JA Telephone: (01793) 528171 Fax: 572516

Raychem Wire & Harness a Division of Tyco Electronics 300, Constitution Drive, Menlo Park, California 94025-1164, USA Telephone (650) 361-3333 Fax: (650) 361-5579