

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










LJxx08xx & QJxx08xHx Series



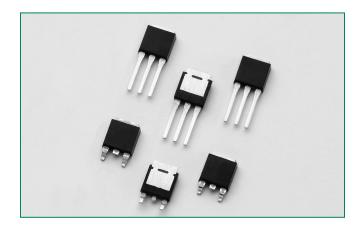

Description

This 8 A High Temperature Alternistor Triac solid state switch series is designed for AC switching and phase control applications such as motor speed and temperature modulation controls, lighting controls, and static switching relays.

Sensitive type components guarantee gate control in Quadrants I & IV needed for digital control circuitry.

Alternistor type components only operate in quadrants I, II, & III and are used in circuits requiring high dv/dt capability.


Main Features

Symbol	Value	Unit	
I _{T(RMS)}	8	А	
V _{DRM} /V _{RRM}	400 or 600	V	
I _{GT (Q1)}	10 to 35	mA	

Features & Benefits

- RoHS compliant
- 150°C maximum junction temperature
- Voltage capability up to 600V
- Surge capability up to 84A at 60Hz half cycle
- Solid-state switching eliminates arcing or contact bounce that create voltage transients
- No contacts to wear out from reaction of switching events
- Restricted (or limited) RFI generation, depending on activation point of sine wave
- Requires only a small gate activation pulse in each half-cycle
- Halogen free and RoHS compliant

Schematic Symbol



PRELIMINARY & CONFIDENTIAL

Littelfuse, Inc. has characterized initial samples of this device and is currently conducting reliability testing. Parts numbers and specifications are subject to change until the datasheet is made final.

Applications

Excellent for AC switching and phase control applications such as heating, lighting, and motor speed controls.

Typical applications are AC solid-state switches, light dimmers, power tools, home/brown goods and white goods appliances.

Alternistor Triacs (no snubber required) are used in applications with high inductive loads requiring the highest commutation performance.

Internally constructed isolated packages are offered for ease of heat sinking with highest isolation voltage.



Thyristors8 Amp High Temperature Sensitive & Alternistor

PRELIMINARY & CONFIDENTIAL

Littelfuse, Inc. has characterized initial samples of this device and is currently conducting reliability testing. Parts numbers and specifications are subject to change until the datasheet is made final.

Absolute Maximum Ratings — Sensitive Triac (4 Quadrants)

Symbol	Parameto	Value	Unit		
$V_{\rm DSM}/V_{\rm RSM}$	Peak non-repetitive blocking voltage	Pw=100 μs		700	V
I _{T(RMS)}	RMS on-state current (full sine wave)	LJxx08Vy/LJxx08Dy	T _C = 130°C	8	А
	Non repetitive surge peak on-state current	f = 50 Hz	t = 20 ms	70	А
TSM	(full cycle, T_J initial = 25°C)	f = 60 Hz	t = 16.7 ms	84	Α
l ² t	I²t Value for fusing	$t_{p} = 8.3$	3 ms	29	A²s
di/dt	Critical rate of rise of on-state current $I_g = 50$ mA with 0.1 μ s rise time	f = 60 Hz	T _J = 150°C	150	A/µs
I _{GTM}	Peak gate trigger current	t _p ≤ 10 μs	T _J = 150°C	0.2	А
$P_{G(AV)}$	Average gate power dissipation	0.3	W		
T _{stg}	Storage temperature range			-40 to 150	°C
T _J	Operating junction temperature range			-40 to 150	°C

Note: xx=voltage/10, y = sensitivity

Absolute Maximum Ratings — Alternistor (3 Quadrants)

Symbol	Parai	Value	Unit			
V_{DSM}/V_{RSM}	Peak non-repetitive blocking voltage	Pw=100 μs			700	V
I _{T(RMS)}	RMS on-state current (full sine wave)	QJxx08VHy	/QJxx08DHy	T _C = 120°C	8	А
	Non repetitive surge peak on-state current	f = 50 Hz	t = 20 ms		70	^
TSM	(full cycle, T _J initial = 25°C)	f = 60 Hz	t = 16.7 ms		84	А
l²t	I²t Value for fusing	$t_p = 8.3 \text{ ms}$			29	A ² s
di/dt	Critical rate of rise of on-state current	f = 6	60 Hz	T _J = 150°C	70	A/µs
I _{GTM}	Peak gate trigger current	$t_{P} \le 10 \mu \text{s};$ $I_{GT} \le I_{GTM}$ $T_{J} = 150^{\circ}\text{C}$			1.6	А
P _{G(AV)}	Average gate power dissipation	$T_J = 150$ °C $I_{GT} = 10$ mA			0.4	W
T _{stg}	Storage temperature range				-40 to 150	°C
T_{J}	Operating junction temperature range				-40 to 150	°C

Note: xx=voltage/10, y = sensitivity

Electrical Characteristics (T_J = 25°C, unless otherwise specified) — Sensitive Triac (4 Quadrants)

Symbol	Test Conditions		drant	LJxx08x8	Unit
l _{GT}	$V_{D} = 12V R_{I} = 60 \Omega$	I – II – III IV	MAX.	10 20	mA
$V_{\rm GT}$		ALL	MAX.	1.3	V
V _{GD}	$V_D = V_{DRM} R_L = 3.3 \text{ k}\Omega T_J = 150^{\circ}\text{C}$	ALL	MIN.	0.15	V
I _H	$I_{T} = 100 \text{mA}$		MAX.	25	mA
al. (/al+	$V_D = V_{DRM}$ Gate Open $T_J = 150$ °C		TYP.	80	\// ₁
αν/αι			I ITE.	50	V/µs
(dv/dt)c	$(di/dt)c = 4.3 \text{ A/ms T}_J = 150^{\circ}\text{C}$		TYP.	2	V/µs
t _{gt}	$I_{G} = 100 \text{mA} \text{ PW} = 15 \mu \text{s} I_{T} = 11.3 \text{ A(pk)}$		TYP.	12	μs

Note: xx=voltage/10, x=package,

Thyristors 8 Amp High Temperature Sensitive & Alternist or the Market Sensitive & Alternist & Alternis

PRELIMINARY & CONFIDENTIAL

St Cittelfuse, Inc. has characterized initial samples of this

Littleffuse, Inc. has characterized initial samples of this device and is currently conducting reliability testing. Parts numbers and specifications are subject to change until the datasheet is made final.

Electrical Characteristics (T_J = 25°C, unless otherwise specified) — Alternistor Triac (3 Quadrants)

Symbol	Test Conditions	Quadrant			QJxx08xH3	QJxx08xH4	Unit
I _{GT}	$V_D = 12V R_L = 60 \Omega$	1 – 11 – 111	MAX.		10	35	mA
V _{GT}	$V_D = 12V N_L = 00.52$	1 – 11 – 111	MAX.		1.	3	V
$V_{\rm GD}$	$V_D = V_{DRM} R_L = 3.3 \text{ k}\Omega T_J = 150^{\circ}\text{C}$ $I - II - III$		MIN.		0.15		V
I _H	I _T = 100mA		MAX.		25	35	mA
dv/d+	dv/dt $V_D = V_{DRM}$ Gate Open TJ = 150°C		MIN	400V	150	350	V/µs
αν/αι			IVIIIN.	600V	100	250	ν/μδ
(dv/dt)c	(di/dt)c = 4.3 A/ms $T_J = 150$ °C		MIN.		15	20	V/µs
t _{gt}	$I_{G} = 100 \text{mA} \text{ PW} = 15 \mu \text{s} I_{T} = 11.3 \text{ A(pk)}$		TYP.		10	10	μs

Note: xx=voltage/10, x = package

Static Characteristics


Symbol		Value	Unit			
V _{TM}	I _{TN}	$t_p = 11.3A$ $t_p = 380$	μs	MAX.	1.50	V
I _{DRM} I _{RRM}			$T_{J} = 25^{\circ}C$		10	μΑ
	$V_{DRM} = V_{RRM}$	LJxx08xy	$T_{J} = 125^{\circ}C$	MAX.	0.5	mA
			T _J = 150°C		3	
		QJxx08xHy	$T_{_{\rm J}}=25^{\circ}{\rm C}$		10	μΑ
			$T_{J} = 125^{\circ}C$		0.5	- mA
			T _J = 150°C		3	

Note: xx=voltage/10, x=package, y=sensitivity

Thermal Resistances

Symbol	Parameter	Value	Unit
$R_{\theta(JC)}$	Junction to case (AC)	1.5	°C/W
$R_{\theta(J-A)}$	Junction to ambient	70	°C/W

Figure 1: Definition of Quadrants

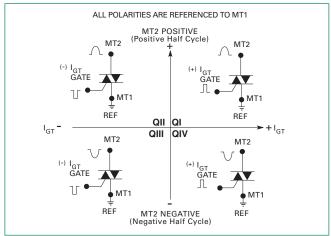

Note: Alternistors will not operate in QIV

Figure 2: Normalized DC Gate Trigger Current for All Quadrants vs. Junction Temperature

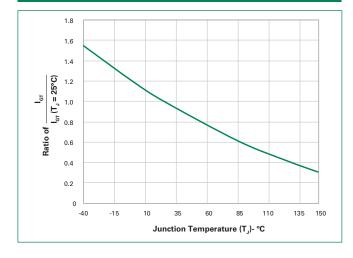


Figure 3: Normalized DC Holding Current vs. Junction Temperature

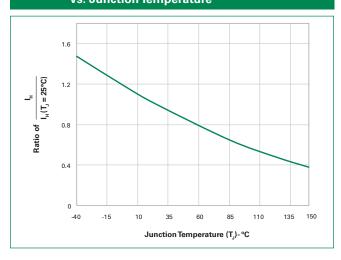


Figure 4: Normalized DC Gate Trigger Voltage for All Quadrants vs. Junction Temperature

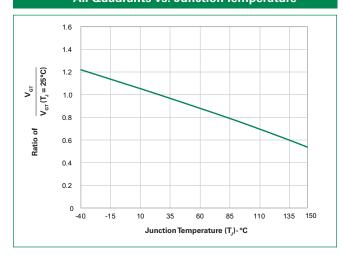


Figure 5: Power Dissipation (Typical) vs. RMS On-State Current

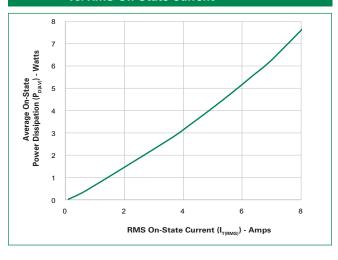


Figure 6: Maximum Allowable Case Temperature vs. On-State Current


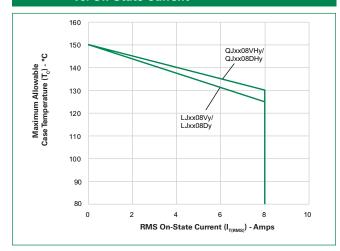


Figure 7: On-State Current vs. On-State Voltage (Typical)

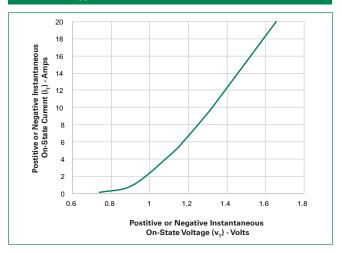

PRELIMINARY & CONFIDENTIAL


Littelfuse, Inc. has characterized initial samples of this device and is currently conducting reliability testing. Parts numbers and specifications are subject to change until the datasheet is made final.

Thyristors 8 Amp High Temperature Sensitive & Alternistor

PRELIMINARY & CONFIDENTIA

Littelfuse, Inc. has characterized initial samples of this device and is currently conducting reliability testing. Parts numbers and specifications are subject to change until the datasheet is made final.

Figure 8: Surge Peak On-State Current vs. Number of Cycles

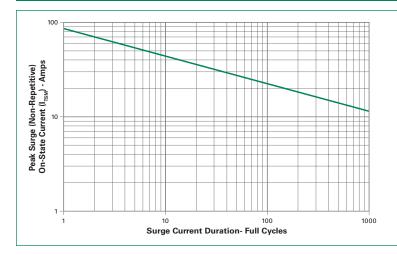

SUPPLY FREQUENCY: 60 Hz Sinusoidal LOAD: Resistive RMS On-State Current: $[I_{T_{RMS}}]$: Maximum Rated Value at Specified Case Temperature

Notes

- Gate control may be lost during and immediately following surge current interval.
- Overload may not be repeated until junction temperature has returned to steady-state rated value.

Soldering Parameters


Reflow Co	ndition	Pb – Free assembly	
	-Temperature Min (T _{s(min)})	150°C	
Pre Heat	-Temperature Max (T _{s(max)})	200°C	
	-Time (min to max) (t _s)	60 – 180 secs	
Average ramp up rate (Liquidus Temp) (T _L) to peak		5°C/second max	
T _{S(max)} to T _L	- Ramp-up Rate	5°C/second max	
Reflow	-Temperature (T _L) (Liquidus)	217°C	
nenow	-Time (t _L)	60 - 150 seconds	
PeakTemp	erature (T _P)	260 ^{+0/-5} °C	
Time with	in 5°C of actual peak ıre (t _p)	20 – 40 seconds	
Ramp-dov	vn Rate	5°C/second max	
Time 25°C to peakTemperature (T _P)		8 minutes Max.	
Do not exc	ceed	280°C	

Physical Specifications

Terminal Finish	100% Matte Tin-plated	
Body Material	UL recognized compound meeting flammability rating V-0.	
Terminal Material	Copper Alloy	

Design Considerations

Careful selection of the correct component for the application's operating parameters and environment will go a long way toward extending the operating life of the Thyristor. Good design practice should limit the maximum continuous current through the main terminals to 75% of the component rating. Other ways to ensure long life for a power discrete semiconductor are proper heat sinking and selection of voltage ratings for worst case conditions. Overheating, overvoltage (including dv/dt), and surge currents are the main killers of semiconductors. Correct mounting, soldering, and forming of the leads also help protect against component damage.

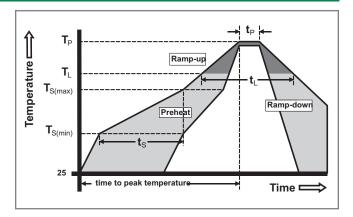


Environmental Specifications

Test	Specifications and Conditions
AC Blocking (V _{DRM})	MIL-STD-750, M-1040, Cond A Applied Peak AC voltage @ 150°C for 1008 hours
Temperature Cycling	MIL-STD-750, M-1051, 100 cycles; -55°C to +150°C; 15-min dwell-time
Temperature/ Humidity	EIA / JEDEC, JESD22-A101 1008 hours; 160V - DC: 85°C; 85% rel humidity
High Temp Storage	MIL-STD-750, M-1031, 1008 hours; 150°C
Low-Temp Storage	1008 hours; -40°C
Resistance to Solder Heat	MIL-STD-750 Method 2031
Solderability	ANSI/J-STD-002, category 3, Test A
Lead Bend	MIL-STD-750, M-2036 Cond E




Dimensions — TO-251AA (V-Package) — V-PAK Through Hole

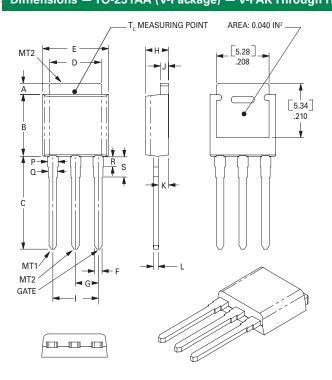

D: .		Inches		Millimeters		
Dimension	Min	Тур	Max	Min	Тур	Max
А	0.037	0.040	0.043	0.94	1.01	1.09
В	0.235	0.242	0.245	5.97	6.15	6.22
С	0.350	0.361	0.375	8.89	9.18	9.53
D	0.205	0.208	0.213	5.21	5.29	5.41
Е	0.255	0.262	0.265	6.48	6.66	6.73
F	0.027	0.031	0.033	0.69	0.80	0.84
G	0.087	0.090	0.093	2.21	2.28	2.36
Н	0.085	0.092	0.095	2.16	2.34	2.41
I	0.176	0.180	0.184	4.47	4.57	4.67
J	0.018	0.020	0.023	0.46	0.51	0.58
K	0.035	0.037	0.039	0.90	0.95	1.00
L	0.018	0.020	0.023	0.46	0.52	0.58
Р	0.042	0.047	0.052	1.06	1.20	1.32
Q	0.034	0.039	0.044	0.86	1.00	1.11
R	0.034	0.039	0.044	0.86	1.00	1.11
S	0.074	0.079	0.084	1.86	2.00	2.11

Dimensions — TO-252AA (D-Package) — D-PAK Surface Mount

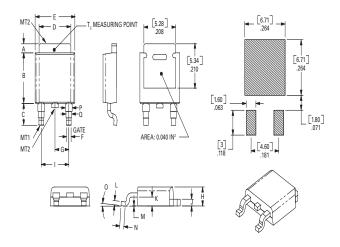

Dimension		Inches		Millimeters			
Dimension	Min	Тур	Max	Min	Тур	Max	
А	0.037	0.040	0.043	0.94	1.01	1.09	
В	0.235	0.243	0.245	5.97	6.16	6.22	
С	0.106	0.108	0.113	2.69	2.74	2.87	
D	0.205	0.208	0.213	5.21	5.29	5.41	
Е	0.255	0.262	0.265	6.48	6.65	6.73	
F	0.027	0.031	0.033	0.69	0.80	0.84	
G	0.087	0.090	0.093	2.21	2.28	2.36	
Н	0.085	0.092	0.095	2.16	2.33	2.41	
	0.176	0.179	0.184	4.47	4.55	4.67	
J	0.018	0.020	0.023	0.46	0.51	0.58	
K	0.035	0.037	0.039	0.90	0.95	1.00	
L	0.018	0.020	0.023	0.46	0.51	0.58	
М	0.000	0.000	0.004	0.00	0.00	0.10	
N	0.021	0.026	0.027	0.53	0.67	0.69	
0	0°	0°	5°	0°	0°	5°	
Р	0.042	0.047	0.052	1.06	1.20	1.32	
Q	0.034	0.039	0.044	0.86	1.00	1.11	

PRELIMINARY & CONFIDENTIAL

Littelfuse, Inc. has characterized initial samples of this device and is currently conducting reliability testing. Parts numbers and specifications are subject to change until the datasheet is made final.

Thyristors

8 Amp High Temperature Sensitive & Alternistor (High Commutation) Triacs

Product Selector

Part Number	Voltage		Gate Sensitivity Quadrants		Time	Darlana
	400V	600V	I – II – III	IV	Туре	Package
LJxx08D8	×	×	10mA	20mA	Sensitive Triac	TO-252 D-PAK
LJxx08V8	×	×	10mA	20mA	Sensitive Triac	TO-251 V-PAK
QJxx08DH3	×	×	10mA		Alternistor Triac	TO-252 D-PAK
QJxx08VH3	Х	х	10mA		Alternistor Triac	TO-251 V-PAK
QJxx08DH4	Х	X	25mA		Alternistor Triac	TO-252 D-PAK
QJxx08VH4	х	Х	25mA		Alternistor Triac	TO-251 V-PAK


Note: xx=voltage/10,

Packing Options


Part Number	Marking	Weight	Packing Mode	Base Quantity
LJxx08D8TP	LJxx08D8	0.3g	Tube Pack	750(75 per tube)
LJxx08D8RP	LJxx08D8	0.3g	Embossed Carrier	2500
LJxx08V8TP	LJxx08V8	0.4g	Tube Pack	750(75 per tube)
QJxx08DH3TP	QJxx08DH3	0.3g	Tube Pack	750(75 per tube)
QJxx08DH3RP	QJxx08DH3	0.3g	Embossed Carrier	2500
QJxx08VH3TP	QJxx08VH3	0.4g	Tube Pack	750(75 per tube)
QJxx08DH4TP	QJxx08DH4	0.3g	Tube Pack	750(75 per tube)
QJxx08DH4RP	QJxx08DH4	0.3g	Embossed Carrier	2500
QJxx08VH4TP	QJxx08VH4	0.4g	Tube Pack	750(75 per tube)

Note: xx=voltage/10

Part Numbering System

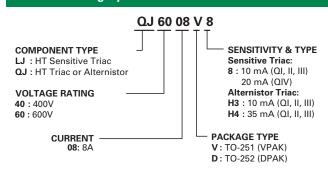

Part Marking System




Y:Year Code M: Month Code L: Location Code DD: Calendar Code

PRELIMINARY & CONFIDENTIAL

Littelfuse, Inc. has characterized initial samples of this device and is currently conducting reliability testing. Parts numbers and specifications are subject to change until the datasheet is made final.

TO-252 Embossed Carrier Reel Pack (RP) Specifications

Meets all EIA-481-2 Standards

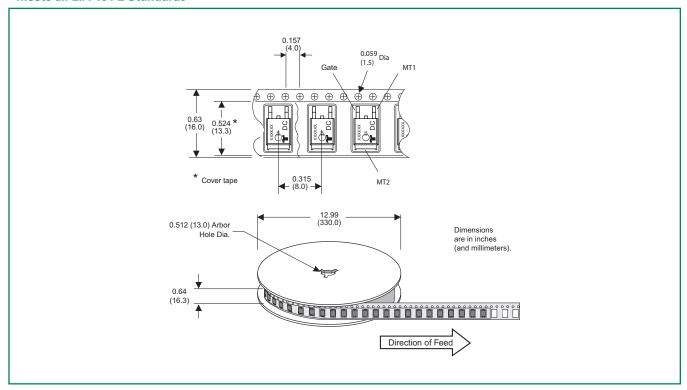

PRELIMINARY & CONFIDENTIAL

Littelfuse, Inc. has characterized initial samples of this device and is currently conducting reliability testing. Parts nbers and specifications are subject to change until the datasheet is made final.

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at http://www.littelfuse.com/disclaimer-electronics.