

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China











QSA156/157/158/159

PACKAGE DIMENSIONS





ST2139

DESCRIPTION

The QSA15X family are OPTOLOGIC™ ICs which feature a Schmitt trigger at output which provides hysteresis for noise immunity and pulse shaping. The basic building block of this IC consists of a photodiode, a linear amplifier, voltage regulator, Schmitt trigger and four output options. The TTL/LSTTL compatible output can drive up to ten TTL loads over supply currents from 4.5 to 16.0 volts. The monolithic die is packaged in a narrow angle, hermetically sealed, TO-18 metal can package.

FEATURES

- High noise immunity.
- Direct TTL/LSTTL interface.
- Hermetically sealed package.
- Reception angle of ±12°.






ABSOLUTE MAXIMUM RATINGS (TA = 25°C Unite	ess Otherwise Specified)
Supply Voltage, V _{cc}	
Storage Temperature Operating Temperature	
Soldering:	
Lead Temperature (Iron)	
Power Dissipation	250 mW ⁽¹⁾
Duration of Output short to V_{cc}	
Sinking Current	
Sourcing Current (QSA156, QSA157)	
Irradiance	

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
Operating Supply Voltage	V _{cc}	4.5		16.0	V	
Positive Going Threshold Irradiance ⁽⁶⁾	Ee (+)	0.025		0.250	mW/cm²	T _A = 25°C
Hysteresis Ratio	Ee(+)/Ee(-)	1.10		2.00		
Supply Current	I _{cc}	_		12.0	mA	Ee = 0 or .3 mW/cm ^{2 (6)}
Peak to peak ripple which will cause false triggering				2.00	V	f = DC to 50 MHZ
QSA156 (BUFFER TOTE	M POLE)					
High Level Output Voltage	V_{OH}	$V_{\text{cc}}-2.1$		_	V	$Ee = .3 \text{ mW/cm}^2$, $I_{OH} = -1.0 \text{ mA}^{(6)}$
Low Level Output Voltage	V _{oL}	_		0.40	V	Ee = 0, I _{oL} = 16 mA
QSA157 (INVERTER TO	TEM POLE)					
High Level Output Voltage	V _{OH}	V _{cc} - 2.1			V	$Ee = 0, I_{OH} = -1.0 \text{ mA}$
Low Level Output Voltage	V _{OL}	_		0.40	V	$Ee = .3 \text{ mW/cm}^2$, $I_{OL} = 16 \text{ mA}^{(6)}$
QSA158 (BUFFER OPEN	COLLECTOR	1)				
High Level Output Current	I _{OH}	_		100	μA	$Ee = .3 \text{ mW/cm}^2$, $V_{OH} = 30 V^{(6)}$
Low Level Output Voltage	V _{oL}	_		0.40	٧	Ee = 0, I _{oL} = 16 mA
QSA159 (INVERTER OP	EN COLLECTO	OR)				
High Level Output Current	I _{OH}			100	μΑ	$Ee = 0, V_{OH} = 30 V$
Low Level Output Voltage	V _{oL}	_		0.40	V	Ee = .3 mW/cm², I _{ot} = 16 mA ⁽⁶⁾




ELECTRICAL CHARACTERISTICS ($T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$) ($V_{cc} = 4.5 \text{ to } 16 \text{ volts}$)								
PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS		
QSA156, QSA157								
Output rise, fall times	tr, tf	_		70	nS	Ee=0 or .3 mW/cm², f=10K HZ DC=50%, R₁=10 TTL loads		
Propagation delay	tphl, tplh		6.0		μS			
QSA158, QSA159								
Output rise, fall times	tr, tf	_		100	nS	Ee=0 or .3 mW/cm², f=10K HZ DC=50%, R _L =300Ω ⁽⁶⁾		
Propagation delay	tphi, tplh		6.0		μS			

Switching Test Curve For Buffers




Switching Test Curve For Inverters



NOTES

- 1. Derate power dissipation linearly 2.50 mW/°C above 25°C.
- 2. RMA flux is recommended.
- 3. Methanol or Isopropyl alcohols are recommended as cleaning agents.
- 4. Soldering iron tip ¼ε" (1.6 mm) minimum from housing.
- 5. As long as leads are not under any stress or spring tension.
- 6. Irradiance measurements are made with an AlGaAs LED emitting light at a peak wavelength of 880 nm.



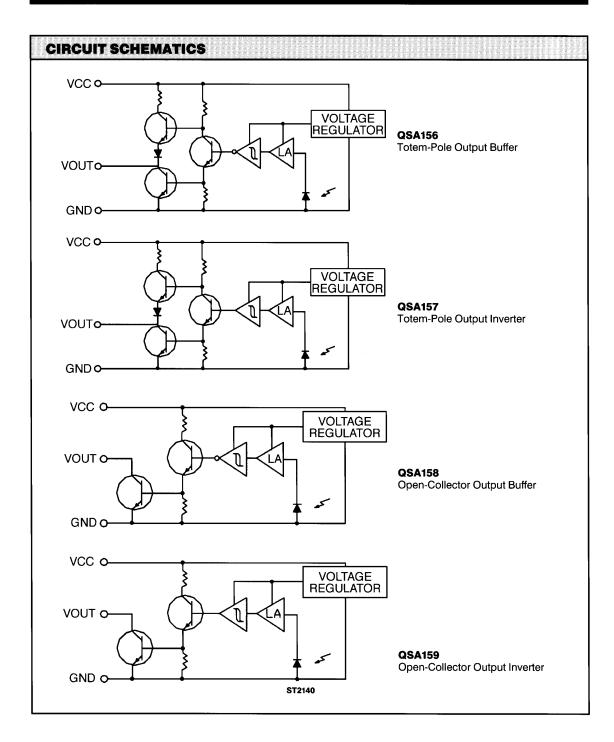



OPTOLOGIC™

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.