imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Features

- Fully RoHS 6/6 Conform
- Full Power at 100°C Ambient Temperature
 1kVDC Isolation

Unregulated Converter

 Suitable for Fully Automated Assembly (including Vapor Phase Soldering)
 Optional Continuous Short Circuit Protection

Description

The R1DA converters are of the enclosed open frame type, i.e. they are not potted. The converters are typically used in general purpose and industrial low power isolation and voltage matching applications where an SMD converter is required. The converter series feature an extended ambient temperature operating range of -40° C to $+100^{\circ}$ C without derating and optional continuous short circuit protection. In addition to single, dual and independent outputs, two isolation options and three different case formats, the converters are also available prepacked as tape and reel for use with automatic insertion machines.

Selection Guide

Part Number SMD	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency typ. (%)	Max Capacitive Load ^{(1)**}
R1DA**xx3.33.3	3.3, 5, 9, 12, 15, 24	3.3/3.3	150/150	75	470µF/470µF
R1DA**xx0505	3.3, 5, 9, 12, 15, 24	5/5	100/100	72-78	470µF/470µF
R1DA**xx0909	3.3, 5, 9, 12, 15, 24	9/9	56/56	74-78	220µF/220µF
R1DA**xx1212	3.3, 5, 9, 12, 15, 24	12/12	42/42	75-80	68µF/68µF
R1DA**xx1515	3.3, 5, 9, 12, 15, 24	15/15	33/33	75-82	68µF/68µF

xx = Input Voltage (other input and output voltage combinations available on request

* add Suffix "P" for Continuous Short Circuit Protection, e. g. R1DA-050505/P

* add Suffix -R for Tape & Reel Packing e.g. R1DA-050505-R. For more Details see Application Notes.

Specifications (measured at T _A = 25°C, r	nominal input voltage, f	full load and after warm-up)	
Input Voltage Range		±109	6
Output Voltage Accuracy	-1% typ., ±5% m		(.
Line Voltage Regulation	All Variants	1% typ).
(Low Line to High Line @ max. Load)			
Load Regulation	3.3V output types	15% typ., 20% max	(.
(10% to 100% Load)	5V output types	12%typ. / 15% max	۲.
	9V output types	7% typ., 10% may	۲.
	12V, 15V output types	6% typ., 10% max	۲.
Output Ripple and Noise (20MHz BW limited)		50 mVp-p typ. / 100mVp-p max	(.
Operating Frequency		20kHz min. / 50kHz typ. / 90kHz max	(.
Efficiency at Full Load		See Selection Guid	е
Minimum Load = 0%	Specifications valid for 10% minimum Load only		
Isolation Voltage Input/Output	(tested for 1 second)	1000VD	С
Isolation Voltage Output/Output	(rated for 1 minute**)	500VAC / 60H	Ζ
Isolation Capacitance		75pF may	(.
Isolation Resistance	V _{iso} =500V	10 G Ω mir	۱.
Short Circuit Protection		1 Secon	d
P-Suffix		Continuou	S
Operating Temperature Range		-40°C to +100°C (see Graph	1)
Storage Temperature Range		-50°C to +125°	С
Reflow Temperature	RoHS compliant 24	45°C (30 sec), Peak 255°C (5 sec) max	(.
Vapor Phase Process	(for more details see A	Application Notes) 230°C (90 sec) max	(.
Relative Humidity		95% R	Н
Humidity Susceptibility Test 1000 hrs / 90% humidity / +85°C am			

continued on next page

**Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.





1 Watt SMD Dual Independent Outputs








UL-60950-1-Certified EN-60950-1-Certified

R1DA

Derating-Graph

(Ambient Temperature)

R1DA-0505



Refer to Application Notes

ECONOLINE DC/DC-Converter

R1DA Series


Specifications (measured at $T_A = 25^{\circ}$ C, nominal input voltage, full load and after warm-up

Package Weight		1.2g
Packing Quantity		33 pcs per tube / 500 pcs per reel
MTBF	Using MIL-HDBK 217F (+25°C)	1045 x 10 ³ hours
	Using MIL-HDBK 217F (+85°C)	183 x 10 ³ hours
Detailed Information see Application Notes chapter "MTBF"		
Certifications		
EN General Safety	Report: 10010807-2009	EN-60950-1. 2nd Edition
Conducted Emissions		EN55022 Class B with Filter
Radiated Emissions		EN55022 Class B with FIlter
UL General Safety	Report: E358085	UL60950-1, 2nd Edition


Notes


Note 1: Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter.

Tolerance Envelope





Typical Characteristics



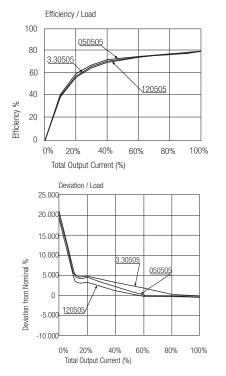

R1DA-xx1212






ECONOLINE

DC/DC-Converter

Package Style and Pinning (mm)


2 PIN Dual SMD Package

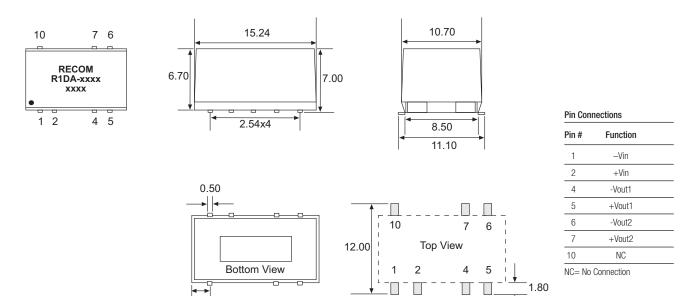

1.20

EMC Filtering - Suggestion for EN55022 Class B (Conducted and emitted)

2.54

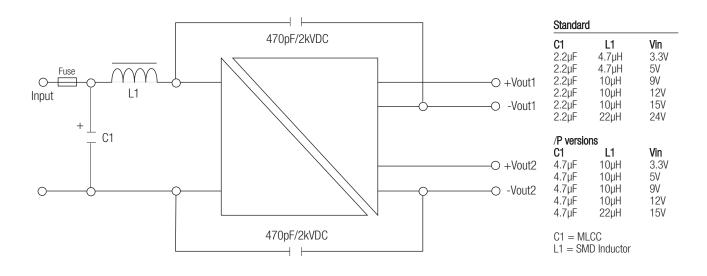

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

www.recom-power.com

R1DA

Series

REV: 0/2015