imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Low Capacitance Modular RJ Jacks

LCT Series



UL Recognized CSA Certified

LCT Series

- Low capacitance model for improved performance.
- Particularly suited for ethernet applications
- Available with block or sleeve inductance
- Available with board grounded shield or spring fingered panel ground interface

Performance Data

Typical Insertion Loss

Line to ground (stop band) in 50 Ohm circuit

	Frequency – MHz						
Model	40	100	200	250	300	500	1000
S – Ferrite Sleeves	8	12	27	50	38	25	20
B – Ferrite Blocks	10	18	22	55	40	28	24

Line to line (pass band) in 50 Ohm circuit

	Frequency – MHz						
Model	2	5	10	30	50	70	100
S – Ferrite Sleeves	-	1.2	1.9	4	5	7	10
B – Ferrite Blocks	1	2	3	5	8	10	13

Model dimensions and PC board layout on pages 255-259





Shield 1

RJ11





Shield 2 RJ11

Shield 2 RJ45

Shield 1 RJ45

Specifications

Contacts: Material: Plating: Barrier underpla Resistance: Initial: After 500	ting: mating cycle	50 m 100 mie	hosphor Bronze iicroinches gold croinches nickel 20 mΩ max. 30 mΩ max.
Capacitors: Type: Standard Value: Standard Tolerar		Monolith	nic ceramic chip 82 pF ± 20%
Ferrites: Type: Sleeves: Block:	Si	ingle-ap	kel zinc ceramic erture cylinders ctangular prism
Shield Material:		Tin-plat	ed copper alloy
Housing Material:	Glass-fille	ed polye	ester (UL94V-0)
Dielectric Withsta Line to Line and			1000 VAC for 60 seconds
Printed Circuit Boa Before soldering After soldering:			1 lb. minimum 20 lb. minimum

Available Part Numbers


RJ11-6LCT1-S	RJ45-8LCT1-S
RJ11-6LCT1-B	RJ45-8LCT1-B
RJ11-6LCT2-S	RJ45-8LCT2-S
RJ11-6LCT2-B	RJ45-8LCT2-B




Model Dimensions

L, LC, LCT and X Series RJ Jack Dimensions







RJ11-2X


RJ11-4X


RJ11-6X

<u>.900</u> 22.86 .860 21.84

RJ11 - Style 2 Shield


Λ





Part No.						
RJ11-2LC2-S	RJ11-2LC2-B	RJ11-4L2-S	RJ11-6L2-B			
RJ11-4LC2-S	RJ11-4LC2-B	RJ11-6L2-S	RJ11-6LCT2-S			
RJ11-6LC2-S	RJ11-6LC2-B	RJ11-4L2-B	RJ11-6LCT2-B			

RJ11 - PC Board Layout




For all RJ11 L, LC, LCT and X Series Models Shown from Component Side

255

.840 21.34


RJ11 - Style 1 Shield



RJ11-2L-S

RJ11-4L-S

RJ11-6L-S



Part No.						
RJ11-2LC1-S	RJ11-2LC1-B	RJ11-4L1-S	RJ11-6L1-B			
RJ11-4LC1-S	RJ11-4LC1-B	RJ11-6L1-S	RJ11-6LCT1-S			
RJ11-6LC1-S	RJ11-6LC1-B	RJ11-4L1-B	RJ11-6LCT1-B			
	·	•				

Part No.

RJ11-2L-B

RJ11-4L-B

RJ11-6L-B

All tolerances ± 0.010 [0.25] unless otherwise noted



L, LC, LCT and X Series RJ Jack Dimensions (continued)





RJ45-6L-S

RJ45-8L-S

RJ45-6L-B

RJ45 - Style 1 Shield







RJ45-8L-B

RJ45-6X

RJ45-8X

RJ45 - Style 2 Shield






Part No.

 RJ45-6LC2-S
 RJ45-8LC2-S
 RJ45-6LC2-B
 RJ45-8LC2-B

 RJ45-6L2-S
 RJ45-8L2-S
 RJ45-6L2-B
 RJ45-8L2-B

 RJ45-8LC72-S
 RJ45-8LC72-B
 RJ45-8L2-B

RJ45 - PC Board Layout

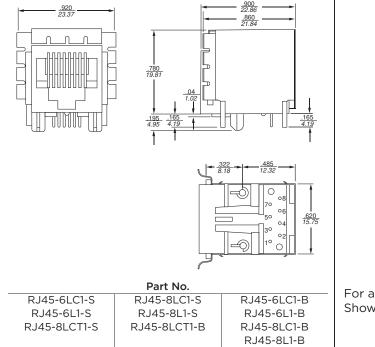

.<u>076±.003</u> Dia. <u>1.93±.08</u> (4 PLACES) .<u>030 +.008/.003</u> Dia. .*76 +.20/-.08* Dia. (8 PLACES) 10 30 °4 .050 1.27 .450 11 43 50 °6 (7 SPACES) 70 °8 .090 .210 5.33 <u>.345</u> 8.76 <u>.128±.003</u> Dia. 3.25±.08 (4 PLACES)


For all RJ45 L, LC, LCT and X Series Models Shown from Component Side

All tolerances ± 0.010 [0.25] unless otherwise noted


Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to te.com/help corcom.com

L, LC, LCT and X Series RJ Jack Dimensions (continued)

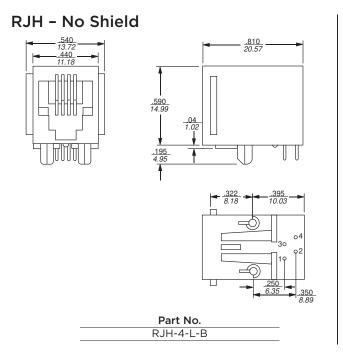






N and Z Series RJ Jack Dimensions




257

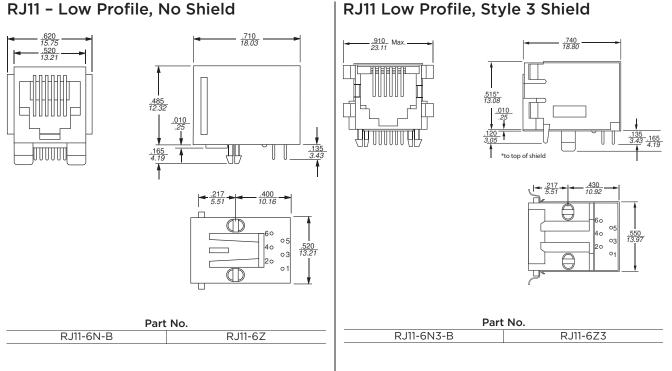


All tolerances ± 0.010 [0.25] unless otherwise noted




N and Z Series RJ Jack Dimensions (continued)






RJ11 Low Profile, PC Board Layout



For all RJ11 N and Z Series Models Shown from Component Side

258

RJ45 - Low Profile, Style 3 Shield

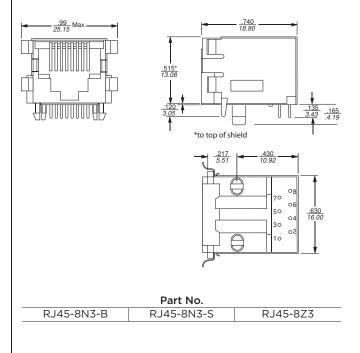


All tolerances ± 0.010 [0.25] unless otherwise noted




N and Z Series RJ Jack Dimensions (continued)

RJ45 Low Profile, Style 4 Shield



RJ45 Low Profile PC Board Layout



For all RJ45 N and Z Series Models Shown from Component Side

All tolerances ± 0.010 [0.25] unless otherwise noted

259