

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Low Profile Filtered Modular Jacks

N Series




UL Recognized CSA Certified



N Series

- Low profile SignalSentry filtered jack
- Available with sleeve or block inductors
- Available unshielded or shielded with board grounded shield or spring fingered panel ground interface

Typical Impedance in Ohms





Unshielded Ferrite Block

Specifications

Contacts:

Material: Phosphor Bronze
Plating: 50 microinches gold
Barrier underplating: 100 microinches nickel
Resistance:

Initial: 20 m Ω max. After 500 mating cycles: 30 m Ω max.

Ferrites:

Type: High resistivity, nickel zinc ceramic Sleeves: Single-aperture cylinders Block: Multi-aperture rectangular prism

Shield Material: Tin-plated copper alloy Housing Material: Black glass-filled polyamide

(STANYL TE250F3)

Dielectric Withstanding Voltage:

Line to Line and Line to Ground: 1000 VAC for

60 seconds

Printed Circuit Board Retention:

Before soldering: 1 lb. minimum
After soldering: 20 lb. minimum

Available Part Numbers


| RJ11-6N-B | RJ45-8N-B | |
|------------|------------|--|
| | RJ45-8N-S | |
| RJ11-6N3-B | RJ45-8N3-B | |
| | RJ45-8N3-S | |
| RJ11-6N4-B | RJ45-8N4-B | |
| | RJ45-8N4-S | |


Model dimensions and PC board layout on pages 255-259

Model Dimensions

L, LC, LCT and X Series RJ Jack Dimensions

RJ11 - No Shield








ი 1

| Part No. | | |
|-----------|-----------|---------|
| RJ11-2L-S | RJ11-2L-B | RJ11-2X |
| RJ11-4L-S | RJ11-4L-B | RJ11-4X |
| RJ11-6L-S | RJ11-6L-B | RJ11-6X |

RJ11 - Style 2 Shield








| Part No. | | | |
|-------------|-------------|------------|--------------|
| RJ11-2LC2-S | RJ11-2LC2-B | RJ11-4L2-S | RJ11-6L2-B |
| RJ11-4LC2-S | RJ11-4LC2-B | RJ11-6L2-S | RJ11-6LCT2-S |
| RJ11-6LC2-S | RJ11-6LC2-B | RJ11-4L2-B | RJ11-6LCT2-B |


RJ11 - Style 1 Shield




RJ11-2LC1-S

RJ11-4LC1-S


RJ11-6LC1-S





| Part No. | | |
|-------------|------------|--------------|
| RJ11-2LC1-B | RJ11-4L1-S | RJ11-6L1-B |
| RJ11-4LC1-B | RJ11-6L1-S | RJ11-6LCT1-S |
| RJ11-6LC1-B | RJ11-4L1-B | RJ11-6LCT1-B |

RJ11 - PC Board Layout

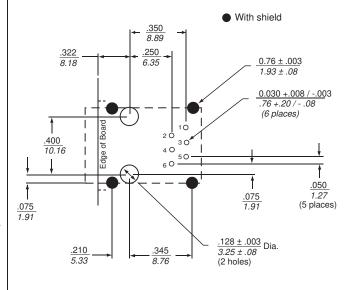

For all RJ11 L, LC, LCT and X Series Models Shown from Component Side

All tolerances ± 0.010 [0.25] unless otherwise noted


255





Model Dimensions (continued)

L, LC, LCT and X Series RJ Jack Dimensions (continued)

RJ45 - No Shield









| Part | : No. |
|-----------|-----------|
| RJ45-6L-S | RJ45-8L-B |
| RJ45-8L-S | RJ45-6X |
| RJ45-6L-B | RJ45-8X |


RJ45 - Style 2 Shield



RJ45-6LC2-S

RJ45-6L2-S






| Part No. | |
|-------------|-----------|
| RJ45-8LC2-S | RJ45-6LC2 |


2-B RJ45-8LC2-B RJ45-8L2-S RJ45-6L2-B RJ45-8L2-B RJ45-8LCT2-S RJ45-8LCT2-B


RJ45 - Style 1 Shield



RJ45-6LC1-S


RJ45-6L1-S RJ45-8LCT1-S





| Part No. | |
|--------------|-------------|
| RJ45-8LC1-S | RJ45-6LC1-B |
| RJ45-8L1-S | RJ45-6L1-B |
| RJ45-8LCT1-B | RJ45-8LC1-B |
| | RJ45-8L1-B |

RJ45 - PC Board Layout

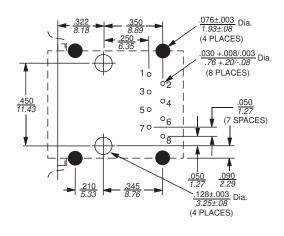


For all RJ45 L, LC, LCT and X Series Models Shown from Component Side


Model Dimensions (continued)

L, LC, LCT and X Series RJ Jack Dimensions (continued)

RJH - No Shield

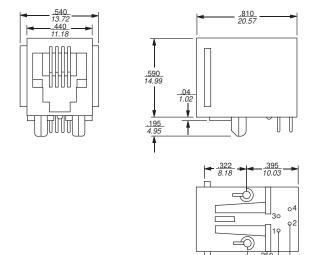


RJH - PC Board Layout

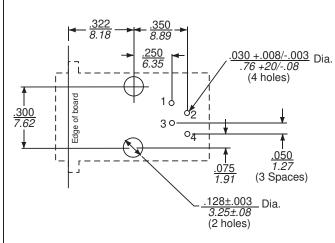


N and Z Series RJ Jack Dimensions

Part No. RJH-4-L-B

RJ11 - Low Profile, No Shield

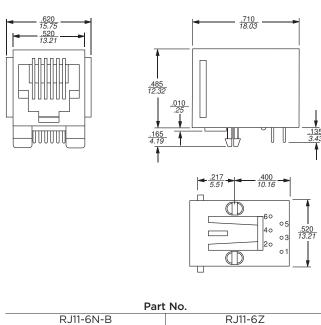

RJ11 Low Profile, Style 3 Shield

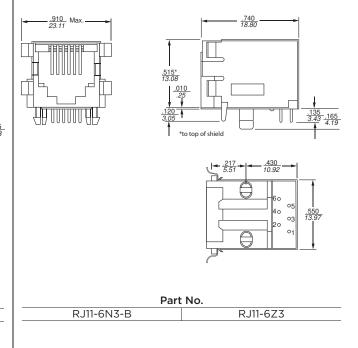




Model Dimensions (continued)


N and Z Series RJ Jack Dimensions (continued)

RJ11 Low Profile, Style 4 Shield

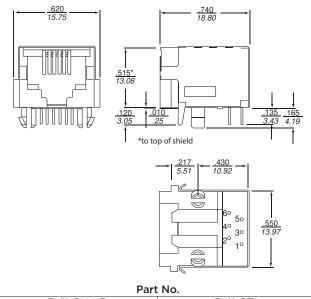


RJ11-6N4-B RJ11-6Z4

RJ45 - Low Profile, No Shield

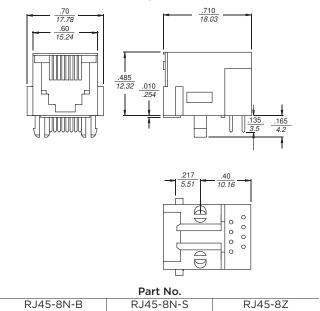


RJ11 Low Profile, PC Board Layout

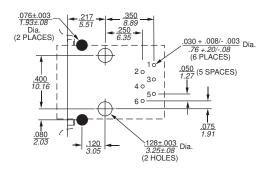

For all RJ11 N and Z Series Models Shown from Component Side


RJ45 - Low Profile, Style 3 Shield

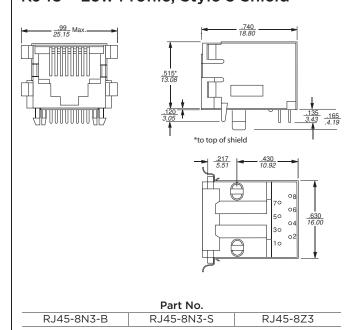

Model Dimensions (continued)


N and Z Series RJ Jack Dimensions (continued)

RJ45 Low Profile, Style 4 Shield

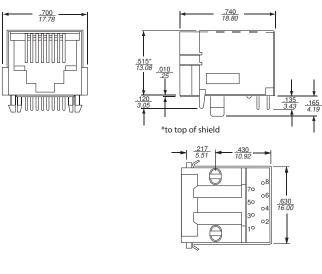

| | Part No. | |
|------------|------------|----------|
| RJ45-8N4-B | RJ45-8N4-S | RJ45-8Z4 |

RJ45 Low Profile PC Board Layout

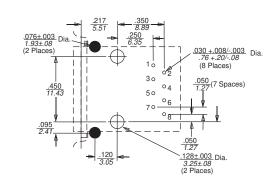

For all RJ45 N and Z Series Models Shown from Component Side