

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








Honeywell

SDX Series

Plastic Silicon Pressure Sensors Low Cost, Temperature Compensated, DIP, 0 psi to 1 psi, 0 psi to 100 psi



DESCRIPTION

The SDX Series sensors provide a very cost-effective solution for pressure applications that require small size plus performance. These calibrated and temperature-compensated sensors give an accurate and stable output over a 0 °C to 50 °C [32 °F to 122 °F] temperature range. This series is intended for use with non-corrosive, non-ionic working fluids such as air and dry gases.

Devices are available to measure absolute and gage pressures from 1 psi (SDX01) up to 100 psi (SDX100). The absolute devices have an internal vacuum reference and an output voltage proportional to absolute pressure. The SDX devices are available in standard commercial and prime grades (SDCXXXXX-A) to allow optimization of accuracy and cost in any given application.

FEATURES

- Low cost DIP
- Precision temperature compensation
- Calibrated zero and span
- Small size
- · Low noise
- · High impedance for low power applications
- Prime grade available (SDXxxxyy-A)

The SDX devices feature an integrated circuit (IC) sensor element and laser trimmed thick film ceramic housed in a compact solvent resistant case. The package is a double-wide, dual-inline package (DIP). This is the same familiar package used by IC manufacturers except it is only 11,94 mm [0.470 in] long and has a pressure port(s). The PC board area used by each DIP is approximately 0.26 in². This extremely small size enables the use of multiple sensors in limited available space. The DIP provides excellent corrosion resistance and isolation to external package stress.

The DIP mounts on a PC board like a standard IC with through-hole pins. The pins anchor the pressure sensor to the PC board and provide a more secure and stable unit than other types of packages.

The output of the bridge is ratiometric to the supply voltage and operation from any dc supply voltage up to 20 Vdc is acceptable.

POTENTIAL APPLICATIONS

- Medical equipment
- Computer peripherals
- · Pneumatic controls
- HVAC

SDX Series

Table 1. Pressure Range Specifications and Ordering Information

Catalog L	Operatin			Full-Scale Span (1)					
Gage	Differential/Gag	e Absolute	Pressur	e	Pressure (2)	Min.	Тур.	Max.	
SDX01G2	SDX01D4	_	0	psid 20 psi	00 :-!	17.37 m\	/ 18.00 mV	18.18 mV	
SDX01G2-A	SDX01D4-A	-	0 psid to 1		20 psia	17.82 m\	/ 18.00 mV	18.80 mV	
SDX05G2	SDX05D4	-	0	psid 20		57.90 m\	/ 60.00 mV	62.10 mV	
SDX05G2-A	SDX05D4-A	-	0 psid to 5		20 psid	59.40 m\	/ 60.00 mV	60.60 mV	
SDX15G2	SDX15D4	-	O poid to 15	E paid	id 30 psid	86.85 m\	/ 90.00 mV	93.15 mV	
SDX15G2-A	SDX15D4-A	-	0 psid to 15	psia		89.10 m\	/ 90.00 mV	90.90 mV	
-	-	SDX15A2		psia 30		86.85 m\	/ 90.00 mV	93.15 mV	
-	-	SDX15A4	O poio to 15		20 paia	86.85 m\	90.00 mV	93.15 mV	
-	•	SDX15A2-A	0 psia to 15		30 psia	89.10 m\	90.00 mV	90.90 mV	
-	-	SDX15A4-A				89.10 m\	90.00 mV	90.90 mV	
SDX30G2	SDX30D4	-	0 psid to 30) psid	60 psid	86.85 m\	90.00 mV	93.15 mV	
SDX30G2-A	SDX30D4-A	_	o psia to so		oo psiu	89.10 m\	/ 90.00 mV	90.90 mV	
_		SDX30A2) psia 60 p	60 psia	86.85 m\	90.00 mV	93.15 mV	
_	ı	SDX30A4	0 psia to 30			86.85 m\	90.00 mV	93.15 mV	
_	-	SDX30A2-A	o psia to so			89.10 m\	/ 90.00 mV	90.90 mV	
_		SDX30A4-A				89.10 m\	90.00 mV	90.90 mV	
SDX100G2	SDX100D4	_	0 psid to 1	150 psid	96.50 m\	/ 100.00 mV	103.5 mV		
SDX100G2-A	SDX100D4-A	_	psid		150 psid	99.00 m\	/ 100.00 mV	101.0 mV	
_	_	SDX100A2		100 150 psia	96.50 m\	/ 100.00 mV	103.5 mV		
		SDX100A4	0 psia to 1		150 psia	96.50 m\	/ 100.00 mV	103.5 mV	
		SDX100A2-A	psia			99.00 m\	/ 100.00 mV	101.0 mV	
_	SDX100A		A			99.00 m\	/ 100.00 mV	101.0 mV	
Nomen	clature		Pressure Connection		Pressure Type		Grade		
			(See Fig. 2)						
G2		A2/G2		gage		standard commercial			
G2-A		A2/G2		gage		prime			
D4		OK		differential		standard commercial			
D4-A		OK		differential		prime			
A2		A2/G2		absolute		standard commercial			
A2-A		A2/G2		absolute		prime			
A4		A4		absolute			standard commercial		
A4-A		A4		absolute			prime		

Table 2. General Specifications (Maximum)

Characteristic	Parameter				
Supply voltage (Vs)	20 Vdc				
Common mode pressure	150 psig				
Lead soldering temperature (2 s to 4 s)	250 °C [482 °F]				

Table 3. Environmental Specifications (Maximum)

Characteristic	Parameter		
Compensated operating temperature	0 °C to 50 °C [32 °F to 122 °F]		
Operating temperature	-40 °C to 85 °C [-40 °F to 185 °F]		
Storage temperature	-55 °C to 125 °C [-67 °F to 257 °F]		
Humidity limits	0% RH to 100% RH		

Plastic Silicon Pressure Sensors, Low Cost, Temperature Compensated, DIP, 0 psi to 1 psi, 0 psi to 100 psi

Table 4. Performance Characteristics (3)

Characteristic		Тур.	Max.	Unit
Zero pressure offset	-1.0	0.0	+1.0	mV
Zero pressure offset (prime grade) (4)	-0.3	0.0	0.3	mV
Combined linearity and hysteresis (5)	_	±0.2	±1.0	% FSO
Combined linearity and hysteresis (prime grade) (5) (13)	_	±0.1	±0.25	% FSO
Temperature effect on span, 0 °C to 50 °C [32 °F to 122 °F] (6)	_	±0.4	±2.0	% FSO
Temperature effect on span, 0 °C to 50 °C [32 °F to 122 °F] (6) (prime grade)	_	±0.4	±1.0	% FSO
Temperature effect on offset 0, °C to 50 °C [32 °F to 122 °F] (6)	_	±0.2	±1.0	mV
Temperature effect on offset 0, °C to 50 °C [32 °F to 122 °F] (prime grade)	_	±0.2	±0.5	mV
Repeatability (7)	_	±0.2	±0.5	% FSO
Input resistance (8)	_	4.0	_	kOhm
Output resistance (9)	_	4.0	_	kOhm
Common mode voltage (10)	1.5	3.0	5.0	Vdc
Response time (11)	_	100	_	μs
Long term stability of offset and span (12)		±0.1	_	mV

Notes:

- Full-Scale Span is the algebraic difference between the output voltage at full-scale pressure and the output at zero pressure. Full-Scale Span is ratiometric to the supply voltage.
- Maximum pressure above which causes permanent sensor failure.
- Reference conditions:
 - ^T_A = 25 °C (unless otherwise noted).
 - Supply V_s = 12 Vdc, Common Mode Line pressure = 0 psig.
 - · Pressure applied to Port B. For absolute devices only, pressure is applied to Port A and the output polarity is reversed.
- Maximum zero pressure offset for absolute devices is ±500 mV.
- Hysteresis is the maximum output difference at any point within the operating pressure range for increasing and decreasing pressure.
- Maximum error band of the offset voltage and the error band of the span, relative to the 25 °C [77 °F] reading.
- Maximum difference in output at any pressure within the operating pressure range and the temperature within 0 °C to 50 °C [32 °F to 122 °F] after:
 - 100 temperature cycles, 0 °C to 50 °C [32 °F to 122 °F].
 - 1.0 million pressure cycles, 0 psi to full-scale span.
- Input resistance is the resistance between V_s and ground.
- Output resistance is the resistance between the + and outputs.
- 10. Common Mode voltage of the output arms for $V_s=12$ Vdc.
- 11. Response time for a 0 psi to Full-Scale Span pressure step change, 10% to 90% rise time.
- 12. Long term stability over a one-year period.
- 13. Maximum combined linearity and hysteresis for the SDX05 prime grade is ±0.5%.

Figure 1. Electrical Connections




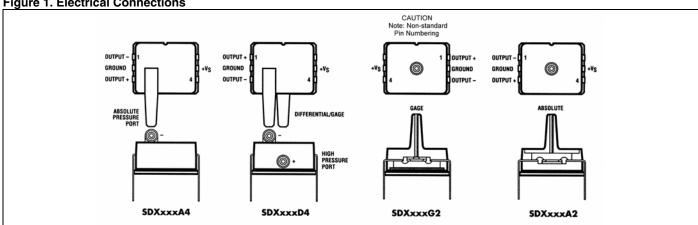


Figure 2. Mounting Dimensions (For Reference Only. mm/[in])







A WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product

Failure to comply with these instructions could result in death or serious injury.

SALES AND SERVICE

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office or:

E-mail: info.sc@honeywell.com

Internet: www.honeywell.com/sensing

Phone and Fax:

Asia Pacific +65 6355-2828; +65 6445-3033 Fax

+44 (0) 1698 481481; +44 (0) 1698 481676 Fax Furone

Latin America +1-305-805-8188; +1-305-883-8257 Fax USA/Canada +1-800-537-6945; +1-815-235-6847

+1-815-235-6545 Fax

Sensing and Control Honeywell 1985 Douglas Drive North Golden Valley, Minnesota 55422 www.honeywell.com/sensing

Honeywell