imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Custom Engineered Solutions for Tomorrow

www.standexmeder.com

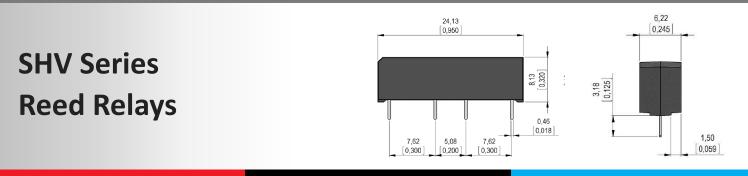

- > Features: Small Size High Voltage Relay, High Dielectric Strength up to 4 kVDC, Internal Magnetic Shield
- > Applications: Portable Test and Medical Equipment, Defibrillators, Cable and In-Circuit Tester & Others
- Markets: Test and Measurement, Medical & Others

Part Description: SHV 00 - 1 A 85 - 78 X 0 K						
Nominal Voltage	Contact QTY	Contact Form	Switch Model	Pin Out	Option	Breakdown Voltage
05, 12	1	А	85	78	D, L	2K, 3K, 4K

Customer Options	Switch Model	Linit
Contact Data	85	Unit
Rated Power (max.) Any DC combination of V&A not to exceed their individual max.'s	100	W
Switching Voltage (max.) DC or peak AC	1,000	V
Switching Current (max.) DC or peak AC	1.0	А
Carry Current (max.) DC or peak AC	2.5	А
Contact Resistance (max.) @ 0.5V & 50mA	150	mOhm
Breakdown Voltage (min.) According to EN60255-5	2 / 3 / 4	kVDC
Operating Time (max.) Incl. Bounce; Measured with w/ Nominal Voltage	1.1	ms
Release Time (max.) Measured with no Coil Excitation	0.1	ms
Insulation Resistance (typ.) Rh<45%, 100V Test Voltage	1010	Ohm
Capacitance (typ.) @ 10kHz across open Switch	0.5	pF



USA: +1. Europe: +49 Asia: +80

+1.866.782.6339 +49.7731.8399.0 +86.21.37820625 | salesusa@standexmeder.com | info@standexmeder.com | salesasia@standexmeder.com



Custom Engineered Solutions for Tomorrow

A Global Leader in the Design, Development, and Manufacture of Sensor and Magnetic Components

Series Datasheet – SHV Reed Relays

www.standexmeder.com

Coil Data			Cail Desistance	Dull In Voltono	Dren Out Valtage	Neminal Cail Daman
Contact Form	Switch Model	Coil Voltage (nom.)	Coil Resistance (typ.)	Pull-In Voltage (max.)	Drop-Out Voltage (min.)	Nominal Coil Power (typ.)
U	nit	VDC	Ohm	VDC	VDC	mW
1A	85 (3kV)	05	180	3.75	0.5	139
		12	500	8.4	1.8	288
	85 (4kV)	05	140	3.75	0.5	179
		12	500	8.4	1.8	288
The Pull In / Drep Out Voltage and Coil Periotance will change at rate of 0.4% per °C						

The Pull-In / Drop-Out Voltage and Coil Resistance will change at rate of 0.4% per °C.

Relay Data		Unit
Dielectric Strength Coil/Contact (min.) according to EN60255-5	4	kVDC
Insulation Resistance Coil/Contact (typ.) Rh<45%, 200V Test Voltage	1012	Ohm
Capacitance Coil/Contact (typ.) @ 10 kHz	1.2	рF
Shock Resistance (max.) 1/2 sine wave duration 11ms	30	g
Vibration Resistance (max.)	20	g
Operating Temperature	-40 to 100	°C
Storage Temperature	-40 to 125	°C
Soldering Temperature (max.) 5 sec. max.	260	°C
Washability	Fully Sealed	

Handling & Assembly Instructions


- Switching inductive and/or capacitive loads creates voltage and/or current peaks, which may damage the relay. Protective circuits need to be used.
- External magnetic fields need to be taken into consideration, including a too high assembly density. This may influence the relays' electrical characteristics.
- Mechanical shock impacts, e.g. dropping the relays, may cause immediate or post-installation failure.





Life Test Data

*Load increase reduces life expectancy of Reed Switches







USA: +1.8 Europe: +49. Asia: +86.

+1.866.782.6339 +49.7731.8399.0 +86.21.37820625

| salesusa@standexmeder.com | info@standexmeder.com | salesasia@standexmeder.com Version 01 27.01.2015 D. Stastny




Custom Engineered Solutions for Tomorrow

A Global Leader in the Design, Development, and Manufacture of Sensor and Magnetic Components

Series Datasheet – SHV Reed Relays

www.standexmeder.com

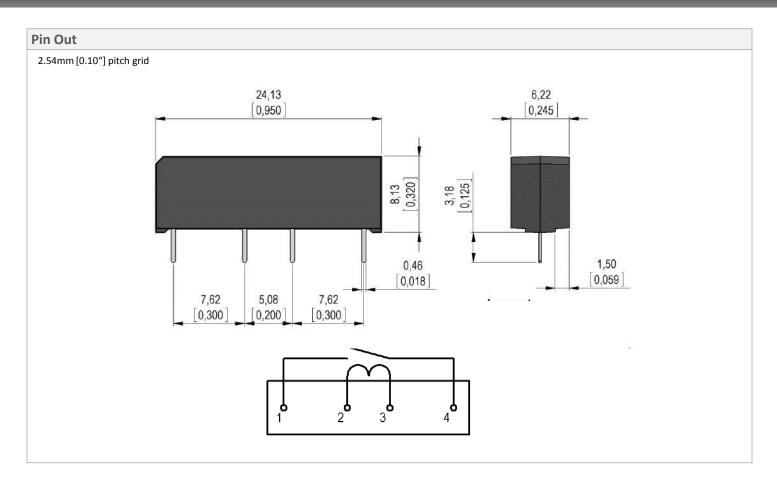



+1.866.782.6339 +49.7731.8399.0 +86.21.37820625 | salesusa@standexmeder.com | info@standexmeder.com | salesasia@standexmeder.com Version 01 27.01.2015 D. Stastny