

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







### LVPECL / HCSL / LVDS / CML

### 1 to 220 MHz High Performance Spread Spectrum Oscillator



#### **Features**


- · World's first differential spread spectrum oscillator
- Extremely low cycle-cycle jitter
  - As low as 10 ps (typical)
- Wide frequency range
  - 1 MHz to 220 MHz
  - 220 MHz to 800 MHz (contact SiTime)
- · Eight spread selections (31.5 KHz modulation rate)
  - Center Spread: ±0.25%, ±0.5%, ±1.0%, ±2.0%
  - Down Spread: -0.5%, -1.0%, -2.0%, -4.0%
  - For -0.25% and ±0.125% contact SiTime
- Low frequency stability (Spread = OFF)
  - ±25 ppm or ±50 ppm
- · Operating voltage
  - 1.8V or 2.5 or 3.3 V
- · Operating temperature range:
  - Industrial, -40°C to 85°C
  - Extended Commercial, -20°C to 70°C
- · Small footprint
  - 5.0 x 3.2 x 0.75 mm
  - 7.0 x 5.0 x 0.90 mm
- · Pb-free and RoHS compliant
- · Ultra-reliable start up and greater immunity from interference

#### **Benefits**

- Services most PC peripherals, networking, and consumer applications
- Provides wide range of spread percentage for maximum electromagnetic interference (EMI) reduction
- Up to -17 dB reduction on third homonic and -12dB on the fundamental
- Fast time to market due to not needing to redesign the PCB for EMI reduction
- · Factory programmable for ultra-fast lead time
- · No crystal or load capacitors required
- · Eliminates crystal qualification time
- 50%+ board saving space
- · Completely quartz-free

#### **Applications**

- · PCI-Express
- USB 3.0
- Fully Buffered DIMM
- · Blade Server
- Router
- · System Clock
- · Networking and Computing
- Automotive
- Industrial

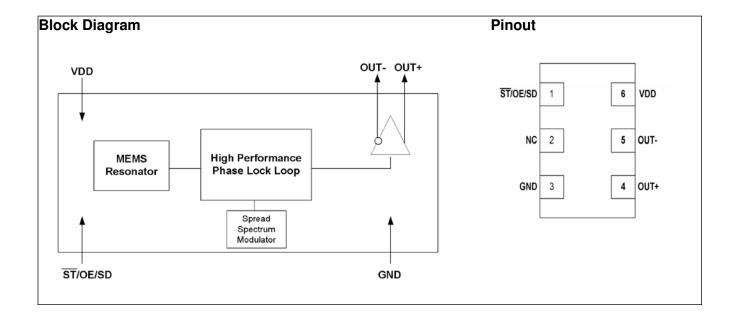

SiTime Corporation 990 Almanor Avenue Rev. 1.11 Revised September 27, 2016

### LVPECL / HCSL / LVDS / CML





#### **Pin Description**

Pin No.	Name		Pin Description
1	ST/OE/SD	Input	Standby or Output Enable pin for OUT+ and OUT OE: When High or Open: OUT+ and OUT- = active When Low: OUT+ and OUT- = High Impedance state ST: When High or Open: OUT+ and OUT- = active When Low: OUT+ and OUT- = Output is low (weak pull down), oscillation stops SD: Spread Disable - disables spread spectrum When High or Open: Spread Spectrum modulation = active When Low: Spread Spectrum modulation = Off
2	NC	NA	No connect pin, leave it floating.
3	GND	Power	VDD power supply ground. Connect to ground
4	OUT+	Output	1 to 220 MHz programmable clock output. For frequencies > 220 MHz contact SiTime
5	OUT-	Output	1
6	VDD	Power	Power supply

### **Absolute Maximum Ratings**

Attempted operation outside the absolute maximum ratings of the part may cause permanent damage to the part. Actual performance of the IC is only guaranteed within the operational specifications, not absolute maximum ratings.

#### **Absolute Maximum Table**

Parameter	Min.	Max.	Unit
Storage Temperature	-65	150	°C
VDD	-0.5	4	V
Vin	GND - 0.5	VDD + 0.5	V
Theta JA ( with copper plane on VDD and GND) 5.0 x 3.2 package	_	68	°C/W
7.0 x 5.0 package when center pad is soldered down 7.0 x 5.0 package when center pad is not soldered down	_	38	°C/W
7.0 x 0.0 package when center pad is not soldered down	_	90	°C/W
Theta JC (with PCB traces of 0.010 inch to all pins) 5.0 x 3.2 package	_	45	°C/W
7.0 x 5.0 package when center pad is soldered down 7.0 x 5.0 package when center pad is not soldered down	_	35	°C/W
7.0 x 3.0 package when center pad is not soldered down	_	48	°C/W
Soldering Temperature (follow standard Pb free soldering guidelines)	_	260	°C
Number of Program Writes	_	1	NA
Program Retention over -40 to 125C, Process, VDD (0 to 3.6V)	_	1,000+	years
Human Body Model (JESD22-A114)	2000	_	V
Charged Device Model (JESD22-C101)	750	_	_
Machine Model (JESD22-A115)	200	_	_

### **DC Electrical Specifications**

### **Environmental Compliance**

Parameter	Condition/Test Method
Mechanical Shock	MIL-STD-883F, Method 2002
Mechanical Vibration	MIL-STD-883F, Method 2007
Temperature Cycle	MIL-STD-883F, Method 1010-65-150°C (1000 cycle)
Solderability	MIL-STD-883F, Method 2003
Moisture Sensitivity Level	MSL1 @ 260°C

### LVPECL / HCSL / LVDS / CML

## 1 to 220 MHz High Performance Spread Spectrum Oscillator



LVCMOS input, OE or  $\overline{ST}$  pin, 3.3V ± 10% or 2.5V ± 10% or 1.8V ± 5%, -40 to 85°C

Symbol	Parameter	Condition	Min.	Тур.	Max.	Unit
V <sub>IH</sub>	Input High Voltage		70	_	_	%Vdd
$V_{IL}$	Input Low Voltage		_	_	30	%Vdd
I <sub>IH</sub>	Input High Current	OE or ST or SD pin	_	_	10	uA
I <sub>IL</sub>	Input Low Current	OE or ST or SD pin	-10	_	_	uA
T <sub>pu</sub>	Power Up Time	Time from minimum power supply voltage to the first cycle (Guaranteed no runt pulses)	_	_	10	ms

### LVPECL, $3.3V \pm 10\%$ or $2.5V \pm 10\%$ , -40 to $85^{\circ}$ C

Symbol	Parameter	Condition	Min.	Тур.	Max.	Unit
$V_{DD}$	Supply Voltage		2.97	3.3	3.63	V
			2.25	2.5	2.75	V
I <sub>DD</sub>	Supply Current	V <sub>DD</sub> = 3.3, Excluding Load Termination Current	_	75	84	mA
		V <sub>DD</sub> = 2.5, Excluding Load Termination Current	_	75	84	mA
V <sub>OH</sub>	Output High Voltage	50 Ohm termination to V <sub>DD</sub> - 2.0V	V <sub>DD</sub> -1.1	-	V <sub>DD</sub> -0.7	V
V <sub>OL</sub>	Output Low Voltage	See Figure 2,3.	V <sub>DD</sub> -2.0	-	V <sub>DD</sub> -1.4	V
V <sub>swing</sub>	Pk-Pk Output Voltage Swing		600	800	1000	mV

### HCSL, 3.3V ±10% or 2.5V ±10%, -40 to 85°C

Symbol	Parameter	Condition	Min.	Тур.	Max.	Unit
$V_{DD}$	Supply Voltage		2.97	3.3	3.63	V
			2.25	2.5	2.75	V
I <sub>DD</sub>	Supply Current	V <sub>DD</sub> = 3.3, Excluding Load Termination Current	_	73	80	mA
		V <sub>DD</sub> = 2.5, Excluding Load Termination Current	-	73	80	mA
V <sub>OH</sub>	Output High Voltage	50 Ohm termination to GND	0.6	0.75	0.95	V
$V_{OL}$	Output Low Voltage	See Figure 4.	0.0	_	50	mV
V <sub>swing</sub>	Pk-Pk Output Voltage Swing		600	750	950	mV

### LVDS, $3.3V \pm 10\%$ or $2.5V \pm 10\%$ , -40 to $85^{\circ}$ C

Symbol	Parameter	Condition	Min.	Тур.	Max.	Unit
$V_{DD}$	Supply Voltage		2.97	3.3	3.63	V
			2.25	2.5	2.75	V
I <sub>DD</sub>	Supply Current	V <sub>DD</sub> = 3.3, Excluding Load Termination Current	_	75	85	mA
		V <sub>DD</sub> = 2.5, Excluding Load Termination Current	_	70	77	mA
V <sub>OD1</sub>	Differential Output Voltage	Swing Mode = Normal	250	350	450	mV
$\Delta V_{\text{OD1}}$	V <sub>OD</sub> Magnitude Change	Single load termination. See Figure 5.	_	_	50	mV
V <sub>OS1</sub>	Offset Voltage		_	1.2	_	V
$\Delta V_{OS1}$	V <sub>OS</sub> Magnitude Change		_	_	50	mV
$V_{OD2}$	Differential Output Voltage	Swing Mode = High	500	700	900	mV
$\Delta V_{OD2}$	V <sub>OD</sub> Magnitude Change	Single load termination. See Figure 5.	_	_	50	mV
V <sub>OS2</sub>	Offset Voltage	- See Figure 3.	_	1.2	_	V
$\Delta V_{ m OS2}$	V <sub>OS</sub> Magnitude Change		_	_	50	mV
$V_{OD3}$	Differential Output Voltage	Swing Mode = High	250	350	450	mV
$\Delta V_{ ext{OD3}}$	V <sub>OD</sub> Magnitude Change	Double load termination.  See Figure 6.	_	_	50	mV
V <sub>OS3</sub>	Offset Voltage		_	1.2	_	V
$\Delta V_{OS3}$	V <sub>OS</sub> Magnitude Change		-	-	50	mV

### LVPECL / HCSL / LVDS / CML

# 1 to 220 MHz High Performance Spread Spectrum Oscillator



CML,  $3.3V \pm 10\%$  or  $2.5V \pm 10\%$  or  $1.8V \pm 5\%$ , -40 to  $85^{\circ}C$ 

Symbol	Parameter	Condition		Min.	Тур.	Max.	Unit
$V_{DD}$	Supply Voltage			2.97	3.3	3.63	V
				2.25	2.5	2.75	V
				1.71	1.8	1.89	V
I <sub>DD</sub>	Supply Current	$V_{DD} = 3.3V$	Excluding Load Termination Current	_	48	51	mA
		V <sub>DD</sub> = 2.5V		_	48	51	mA
		$V_{DD} = 1.8V$	Guirent	_	48	51	mA
V <sub>OH1</sub>	Output High Voltage	wing Mode = Normal		V <sub>DD</sub> -0.1	_	$V_{DD}$	V
V <sub>OL1</sub>	Output Low Voltage	Single Load Termination See Figure 7.		V <sub>DD</sub> -0.55	V <sub>DD</sub> -0.425	V <sub>DD</sub> -0.3	V
V <sub>swing1</sub>	Pk-Pk Output Voltage Swing	1000 riguro 7.		300	425	550	mV
$V_{OH2}$	Output High Voltage	Swing Mode = High		V <sub>DD</sub> -0.1	_	$V_{DD}$	V
V <sub>OL2</sub>	Output Low Voltage	Single Load Termination See Figure 7.		V <sub>DD</sub> -1.1	V <sub>DD</sub> -0.85	V <sub>DD</sub> -0.6	V
V <sub>swing2</sub>	Pk-Pk Output Voltage Swing	1000 riguro 7.		600	850	1100	mV
V <sub>OH3</sub>	Output High Voltage	Swing Mode = High		V <sub>DD</sub> -0.1	_	$V_{DD}$	V
$V_{OL3}$	Output Low Voltage	Double Load Termination See Figure 8.		V <sub>DD</sub> -0.55	V <sub>DD</sub> -0.425	V <sub>DD</sub> -0.3	V
V <sub>swing3</sub>	Pk-Pk Output Voltage Swing	1000 r iguiro o.		300	425	550	mV

## **AC Electrical Specifications**

LVPECL, 3.3V ± 10%, -40 to 85°C

Symbol	Parameter	Condition		Min.	Тур.	Max.	Unit
F <sub>out</sub>	Output Frequency				_	220	MHz
F <sub>stab</sub>	Frequency Stability	Inclusive of initial stability,	-20 to 70°C	-25	_	+25	ppm
		operating temp., rated power supply voltage change, load change	-40 to 85°C	-50	-	+50	ppm
F <sub>age</sub>	Aging	First year @ 25°C	•	_	_	1	PPM
DC	Duty Cycle			45	_	55	%
t <sub>R</sub> /t <sub>F</sub>	Output Rise/Fall Time	20% to 80%		100	150	300	ps
T <sub>CCJ</sub>	Cycle-Cycle Jitter	$F_{out} = 100 \text{ MHz}, -0.5\% \text{ down spre}$	ead	_	10	16	ps
		F <sub>out</sub> = 150 MHz, -0.5% down spread		_	8	14	ps
		$F_{out} = 200 \text{ MHz}, -0.5\% \text{ down spre}$	ead	_	8	14	ps

### LVPECL, 2.5V ± 10%, -40 to 85°C

Symbol	Parameter	Condition		Min.	Тур.	Max.	Unit
F <sub>out</sub>	Output Frequency				_	220	MHz
F <sub>stab</sub>	Frequency Stability	Inclusive of initial stability,	apprenting tomp, retad power	-25	_	+25	ppm
		operating temp., rated power supply voltage change, load change	-40 to 85°C	-50	_	+50	ppm
Fage	Aging	First year @ 25°C		_	_	1	PPM
DC	Duty Cycle			45	_	55	%
t <sub>R</sub> /t <sub>F</sub>	Output Rise/Fall Time	20% to 80%		100	150	300	ps
T <sub>CCJ</sub>	Cycle-Cycle Jitter	F <sub>out</sub> = 100 MHz, -0.5% down spre	ead	_	10	16	ps
		F <sub>out</sub> = 150 MHz, -0.5% down spread		_	8	14	ps
		$F_{out} = 200 \text{ MHz}, -0.5\% \text{ down spre}$	ead	-	8	14	ps

## LVPECL / HCSL / LVDS / CML

# 1 to 220 MHz High Performance Spread Spectrum Oscillator



HCSL, 3.3V ± 10%, -40 to 85°C

Symbol	Parameter	Condition		Min.	Тур.	Max.	Unit
F <sub>out</sub>	Output Frequency			1.0	-	220	MHz
F <sub>stab</sub>	Frequency Stability Inclusive of initial stability, operating temp., rated power -20 to 70°C		-20 to 70°C	-25	_	+25	ppm
	supply voltage change, load change	-40 to 85°C	-50	-	+50	ppm	
Fage	Aging	First year @ 25°C	•	_	_	1	PPM
DC	Duty Cycle			45	_	55	%
t <sub>R</sub> /t <sub>F</sub>	Output Rise/Fall Time	20% to 80%		200	280	375	ps
T <sub>CCJ</sub>	Cycle-Cycle Jitter	F <sub>out</sub> = 100 MHz, -0.5% down s <sub>1</sub>	F <sub>out</sub> = 100 MHz, -0.5% down spread		10	16	ps
		F <sub>out</sub> = 150 MHz, -0.5% down spread		_	10	15	ps
		F <sub>out</sub> = 200 MHz, -0.5% down sp	pread	_	10	15	ps

### HCSL, 2.5V ± 10%, -40 to 85°C

Symbol	Parameter	Condition	Condition		Тур.	Max.	Unit
F <sub>out</sub>	Output Frequency				_	220	MHz
F <sub>stab</sub>	Frequency Stability	operating temp., rated power		-25	_	+25	ppm
		supply voltage change, load change	-40 to 85°C	-50	-	+50	ppm
F <sub>age</sub>	Aging	First year @ 25°C	•	_	_	1	PPM
DC	Duty Cycle			45	_	55	%
t <sub>R</sub> /t <sub>F</sub>	Output Rise/Fall Time	20% to 80%		200	300	400	ps
T <sub>CCJ</sub>	Cycle-Cycle Jitter	F <sub>out</sub> = 100 MHz, -0.5% down s	pread	_	9	19	ps
		F <sub>out</sub> = 150 MHz, -0.5% down spread		_	9	17	ps
		$F_{out} = 200 \text{ MHz}, -0.5\% \text{ down s}$	pread	_	9	15	ps

### LVDS, 3.3V ± 10%, -40 to 85°C

Symbol	Parameter	Condition	Condition		Тур.	Max.	Unit
F <sub>out</sub>	Output Frequency				-	220	MHz
F <sub>stab</sub>	Frequency Stability	Inclusive of initial stability, operating temp., rated power		-25	_	+25	ppm
		supply voltage change, load change	-40 to 85°C	-50	_	+50	ppm
Fage	Aging	First year @ 25°C	First year @ 25°C		_	1	PPM
DC	Duty Cycle				_	55	%
t <sub>R</sub> /t <sub>F</sub>	Output Rise/Fall Time	20% to 80%	20% to 80%		200	325	ps
T <sub>CCJ</sub>	Cycle-Cycle Jitter	F <sub>out</sub> = 100 MHz, -0.5% down s	F <sub>out</sub> = 100 MHz, -0.5% down spread		11	19	ps
	F <sub>out</sub> = 150 MHz, -0.5% down spread F <sub>out</sub> = 200 MHz, -0.5% down spread		pread	_	11	20	ps
			_	11	21	ps	

## LVPECL / HCSL / LVDS / CML

# 1 to 220 MHz High Performance Spread Spectrum Oscillator



## LVDS, 2.5V ± 10%, -40 to 85°C

Symbol	Parameter	Condition	Condition		Тур.	Max.	Unit
F <sub>out</sub>	Output Frequency				_	220	MHz
F <sub>stab</sub>	Frequency Stability	Inclusive of initial stability, operating temp., rated power	-20 to 70°C	-25	_	+25	ppm
		supply voltage change, load change	-40 to 85°C	-50	-	+50	ppm
F <sub>age</sub>	Aging	First year @ 25°C	First year @ 25°C		_	1	PPM
DC	Duty Cycle				_	55	%
t <sub>R</sub> /t <sub>F</sub>	Output Rise/Fall Time	20% to 80%	20% to 80%		260	325	ps
T <sub>CCJ</sub>	Cycle-Cycle Jitter	F <sub>out</sub> = 100 MHz, -0.5% down s	F <sub>out</sub> = 100 MHz, -0.5% down spread		14	26	ps
		F <sub>out</sub> = 150 MHz, -0.5% down s	F <sub>out</sub> = 150 MHz, -0.5% down spread		14	26	ps
		F <sub>out</sub> = 200 MHz, -0.5% down s	F <sub>out</sub> = 200 MHz, -0.5% down spread		14	27	ps

### CML, $3.3V \pm 10\%$ , -40 to $85^{\circ}C$

Symbol	Parameter	Condition	Condition		Тур.	Max.	Unit
F <sub>out</sub>	Output Frequency				_	220	MHz
F <sub>stab</sub>	Frequency Stability	Inclusive of initial stability, operating temp., rated power		-25	_	+25	ppm
		supply voltage change, load change	-40 to 85°C	-50	_	+50	ppm
Fage	Aging	First year @ 25°C	First year @ 25°C		_	1	PPM
DC	Duty Cycle				_	55	%
t <sub>R</sub> /t <sub>F</sub>	Output Rise/Fall Time	20% to 80%	20% to 80%		220	300	ps
T <sub>CCJ</sub>	Cycle-Cycle Jitter	F <sub>out</sub> = 100 MHz, -0.5% down s	F <sub>out</sub> = 100 MHz, -0.5% down spread		11	20	ps
		$F_{out}$ = 150 MHz, -0.5% down spread $F_{out}$ = 200 MHz, -0.5% down spread		_	11	18	ps
				_	10	19	ps

### CML, $2.5V \pm 10\%$ , -40 to $85^{\circ}C$

Symbol	Parameter	Condition	Condition		Тур.	Max.	Unit
F <sub>out</sub>	Output Frequency				_	220	MHz
F <sub>stab</sub>	Frequency Stability	Inclusive of initial stability, operating temp., rated power	-20 to 70°C	-25	_	+25	ppm
		supply voltage change, load change	-40 to 85°C	-50	_	+50	ppm
Fage	Aging	First year @ 25°C	First year @ 25°C		_	1	PPM
DC	Duty Cycle				_	55	%
t <sub>R</sub> /t <sub>F</sub>	Output Rise/Fall Time	20% to 80%	20% to 80%		230	300	ps
T <sub>CCJ</sub>	Cycle-Cycle Jitter	F <sub>out</sub> = 100 MHz, -0.5% down spread		_	13	22	ps
		F <sub>out</sub> = 150 MHz, -0.5% down spread		_	12	19	ps
		$F_{out} = 200 \text{ MHz}, -0.5\% \text{ down s}$	F <sub>out</sub> = 200 MHz, -0.5% down spread		11	20	ps

### LVPECL / HCSL / LVDS / CML

## 1 to 220 MHz High Performance Spread Spectrum Oscillator



CML, 1.8V ± 5%, -40 to 85°C

Symbol	Parameter	Condition	Condition		Тур.	Max.	Unit
F <sub>out</sub>	Output Frequency				_	220	MHz
F <sub>stab</sub>	Frequency Stability	Inclusive of initial stability, operating temp., rated power	-20 to 70°C	-25	_	+25	ppm
		supply voltage change, load change	-40 to 85°C	-50	-	+50	ppm
Fage	Aging	First year @ 25°C	First year @ 25°C		_	1	PPM
DC	Duty Cycle				_	55	%
$t_R/t_F$	Output Rise/Fall Time	20% to 80%	20% to 80%		230	300	ps
T <sub>CCJ</sub>	Cycle-Cycle Jitter	F <sub>out</sub> = 100 MHz, -0.5% down spread		_	13	23	ps
		F <sub>out</sub> = 150 MHz, -0.5% down spread		_	12	22	ps
		$F_{out} = 200 \text{ MHz}, -0.5\% \text{ down s}$	F <sub>out</sub> = 200 MHz, -0.5% down spread		12	21	ps

#### **Termination Diagrams**

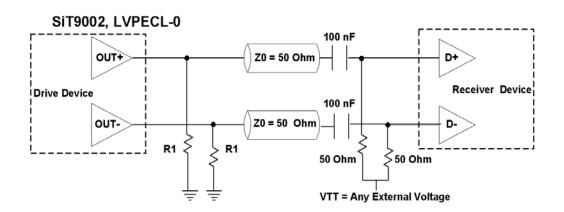




Figure 1. LVPECL AC Coupled Typical Termination

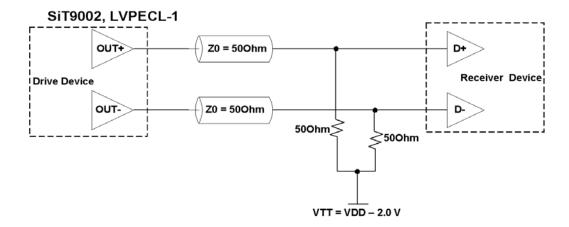


Figure 2. LVPECL DC Coupled Typical Termination with Termination Voltage

## 1 to 220 MHz High Performance Spread Spectrum Oscillator



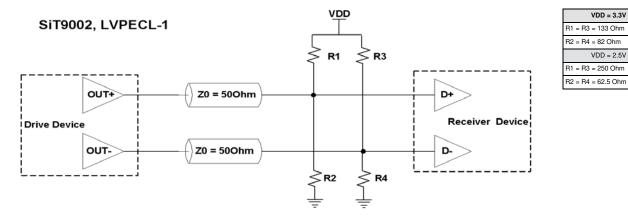


Figure 3. LVPECL DC Coupled Typical Termination without Termination Voltage

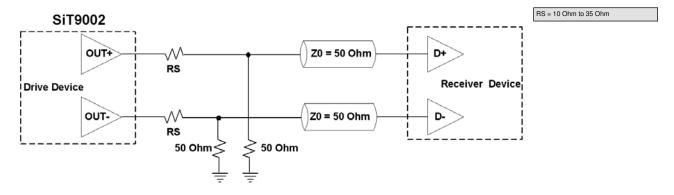


Figure 4. HCSL Typical Termination

#### Note:

1. All the tests are done with RS = 20 Ohm (recommended).


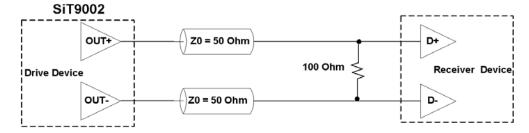


Figure 5. LVDS Single Load Termination (Load Terminated)

# 1 to 220 MHz High Performance Spread Spectrum Oscillator



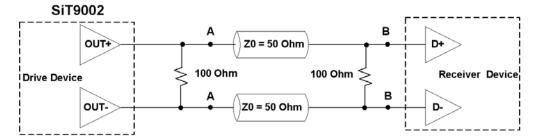

Note: For AC coupled operation, include/insert decoupling caps at points A or B

Figure 6. LVDS Double Termination (Source + Load Terminated)


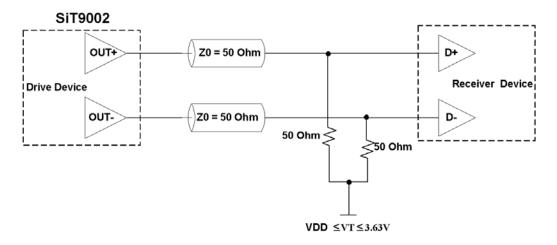


Figure 7. CML Single Load Termination

### LVPECL / HCSL / LVDS / CML

## 1 to 220 MHz High Performance Spread Spectrum Oscillator



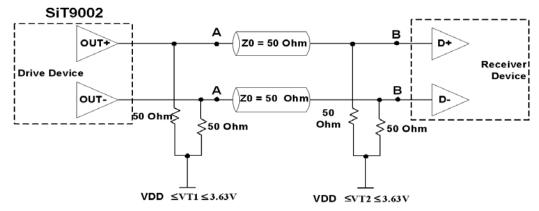

#### Notes:

- 1. For DC-coupled operation, VT1 = VT2
- 2. For AC coupled operation, include/insert decoupling caps at points A or B
- 3. For AC-coupled operation with capacitors placed at point A, VT2 sets the input common mode of Receiver Device and need not to be related to VT1

Figure 8. CML Double Load Termination


#### LVPECL / HCSL / LVDS / CML

1 to 220 MHz High Performance Spread Spectrum Oscillator



#### **Ordering Information**

The Part No. Guide is for reference only. For real-time customization and exact part number, use the SiTime Part Number Generator.

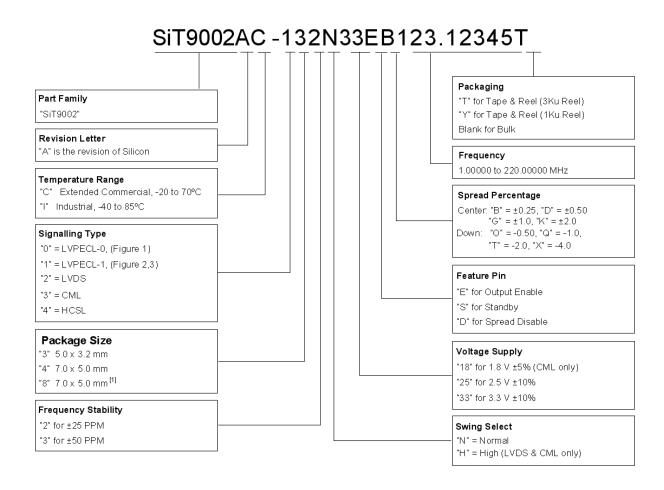

# Frequency Stability vs. Temperature Range Options

Frequency	Temperature	Supply Voltage				
Stability (PPM)	Range	1.8 V	2.5 V	3.3 V		
105	C (-20 to +70°C)	✓	✓	✓		
±25	I (-40 to +85°C)	✓	✓	✓		
150	C (-20 to +70°C)	✓	✓	✓		
±50	I (-40 to +85°C)	✓	✓	✓		

# Signaling Type vs. Swing Select Options

Signaling		Supply Voltage			
Туре	Swing Select	1.8 V 2.5 V		3.3 V	
LVPECL-0	Normal	_	✓	✓	
LVPEGL-0	High	_	_	_	
LVDEOL 1	Normal	_	✓	✓	
LVPECL-1	High	_	-	-	
LVDS	Normal	-	✓	✓	
LVDS	High	_	✓	✓	
CML	Normal	✓	✓	✓	
CML	High	✓	✓	✓	
11001	Normal	_	<b>√</b>	<b>√</b>	
HCSL	High	_	_	_	

#### Note:

Without Center Pad.

### LVPECL / HCSL / LVDS / CML

### 1 to 220 MHz High Performance Spread Spectrum Oscillator





#### Package Information [2]

Dimension (mm)


### Land Pattern<sup>[3]</sup> (recommended) (mm)


#### 5.0 x 3.2 x 0.75mm

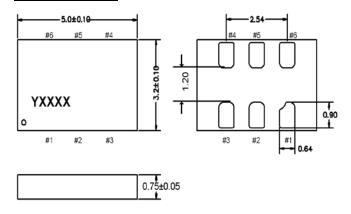



#### 7.0 x 5.0 x 0.90mm

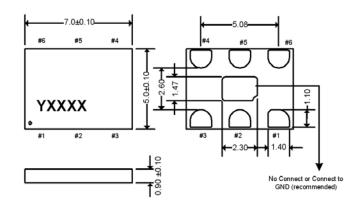



#### Notes:

- 2. Y denotes manufacturing origin and XXXX denotes manufacturing lot number. The value of "Y" will depend on the assembly location of the device.
- 3. A capacitor of value  $0.1 \mu F$  between VDD and GND is recommended.
- 4. The 7050 package with part number designation "-8" has NO center pad.

© SiTime Corporation 2013. The information contained herein is subject to change at any time without notice. SiTime assumes no responsibility or liability for any loss, damage or defect of a Product which is caused in whole or in part by (i) use of any circuitry other than circuitry embodied in a SiTime product, (ii) misuse or abuse including static discharge, neglect or accident, (iii) unauthorized modification or repairs which have been soldered or altered during assembly and are not capable of being tested by SiTime under its normal test conditions, or (iv) improper installation, storage, handling, warehousing or transportation, or (v) being subjected to unusual physical, thermal, or electrical stress.

Disclaimer: SiTime makes no warranty of any kind, express or implied, with regard to this material, and specifically disclaims any and all express or implied warranties, either in fact or by operation of law, statutory or otherwise, including the implied warranties of merchantability and fitness for use or a particular purpose, and any implied warranty arising from course of dealing or usage of trade, as well as any common-law duties relating to accuracy or lack of negligence, with respect to this material, any sitime product and any product documentation. products sold by sitme are not suitable or intended to be used in a life support application or component, to operate nuclear facilities, or in other mission critical applications where human life may be involved or at stake. all sales are made conditioned upon compliance with the critical uses policy set forth below.

#### CRITICAL USE EXCLUSION POLICY

BUYER AGREES NOT TO USE SITIME'S PRODUCTS FOR ANY APPLICATION OR IN ANY COMPONENTS USED IN LIFE SUPPORT DEVICES OR TO OPERATE NUCLEAR FACILITIES OR FOR USE IN OTHER MISSION-CRITICAL APPLICATIONS OR COMPONENTS WHERE HUMAN LIFE OR PROPERTY MAY BE AT STAKE.

SiTime owns all rights, title and interest to the intellectual property related to SiTime's products, including any software, firmware, copyright, patent, or trademark. The sale of SiTime products does not convey or imply any license under patent or other rights. SiTime retains the copyright and trademark rights in all documents, catalogs and plans supplied pursuant to or ancillary to the sale of products or services by SiTime. Unless otherwise agreed to in writing by SiTime, any reproduction, modification, translation, compilation, or representation of this material shall be strictly prohibited.