

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









October 2016

Inductors for Power Circuits

Wound Ferrite

SLF Series

SLF7032 Type

SLF7032



REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

⚠ REMINDERS						
 The storage period is less than 6 months. Be sure to follow the storage conditions (Temperature: 5 to 30°C, Humidity: 10 to less). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. 	75% RH or					
On not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).						
 Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip tendoes not exceed 150°C. 	mperature					
 Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur. 						
When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.	chip due to					
 Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set design. 	thermal					
 Carefully lay out the coil for the circuit board design of the non-magnetic shield type. A malfunction may occur due to magnetic interference. 						
Use a wrist band to discharge static electricity in your body through the grounding wire.						
On not expose the products to magnets or magnetic fields.						
On not use for a purpose outside of the contents regulated in the delivery specifications.						
The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunication equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measure equipment, industrial robots) under a normal operation and use condition. The products are not designed or warranted to meet the requirements of the applications listed below, whose performance quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious day society, person or property. If you intend to use the products in the applications listed below or if you have special requirements exceeding the range of set forth in the each catalog, please contact us.	urement e and/or amage to					

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

INDUCTORS &T

Inductors for Power Circuits

Wound Ferrite

Product compatible with RoHS directive Compatible with lead-free solders

Overview of SLF7032 Type


FEATURES

- O Magnetic shield type wound inductor for power circuits.
- O Product lineup allows for various usages.

APPLICATION

Thin-screen TV, LCDs, AV equipment, gaming equipment, other electrical devices

■ PART NUMBER CONSTRUCTION

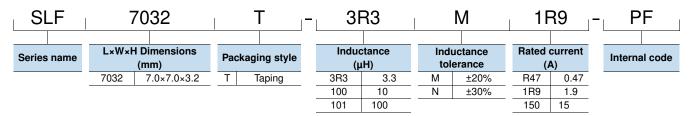

■ OPERATING TEMPERATURE RANGE, PACKAGE QUANTITY, PRODUCT WEIGHT


	Temperat	ure range	Package quantity	Individual weight
Туре	Operating Storage temperature**			
	(°C)	(°C)	(pieces/reel)	(g)
SLF7032	-40 to +105	-40 to +105	1000	0.4

^{*} Operating temperature range includes self-temperature rise.

^{**} The Storage temperature range is for after the circuit board is mounted.


RoHS Directive Compliant Product: See the following for more details.https://product.tdk.com/info/en/environment/rohs/index.html

■ RECOMMENDED REFLOW PROFILE

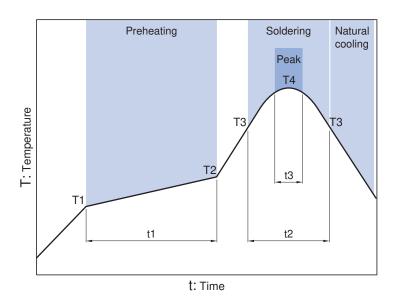


Preheating Soldering Peak Temp. Temp. Time Time Temp. Time T1 T2 T4 Т3 t3 150°C 180°C 60 to 120s 230°C 250°C 5s 30s

■SHAPE & DIMENSIONS

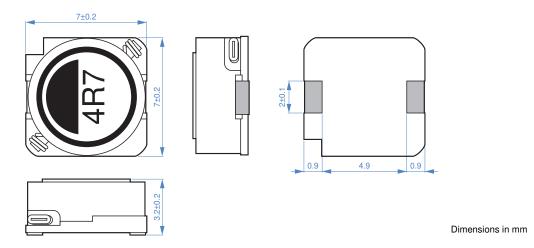

■ RECOMMENDED LAND PATTERN



■ ELECTRICAL CHARACTERISTICS

□ CHARACTERISTICS SPECIFICATION TABLE

L		L measuring frequency	DC resistance Rated current		Part No.
(μH)	Tolerance	(kHz)	(Ω)	(A)max.	
3.3	±20%	100	0.023	1.9	SLF7032T-3R3M1R9-2PF
4.7	±20%	100	0.030	1.7	SLF7032T-4R7M1R7-2PF
6.8	±20%	100	0.041	1.6	SLF7032T-6R8M1R6-2PF
10	±20%	100	0.053	1.4	SLF7032T-100M1R4-2PF
15	±20%	100	0.075	1.1	SLF7032T-150M1R1-2PF
22	±20%	100	0.11	0.96	SLF7032T-220MR96-2PF
33	±20%	100	0.16	0.75	SLF7032T-330MR75-2PF
47	±20%	100	0.24	0.67	SLF7032T-470MR67-2PF
68	±20%	100	0.31	0.59	SLF7032T-680MR59-2PF
100	±20%	100	0.45	0.45	SLF7032T-101MR45-2PF
150	±20%	100	0.65	0.37	SLF7032T-151MR37-2PF
220	±20%	100	1.05	0.29	SLF7032T-221MR29-2PF
330	±20%	100	1.67	0.22	SLF7032T-331MR22-2PF
470	±20%	100	2.05	0.2	SLF7032T-471MR20-2PF
680	±20%	100	3.15	0.16	SLF7032T-681MR16-2PF
1000	±20%	100	4.78	0.13	SLF7032T-102MR13-2PF


$\bigcirc \ \text{Measurement equipment}$

Measurement item	Product No.	Manufacturer		
L	4194A	Keysight Technologies		
DC resistance	VP-2941A	Panasonic		
Rated current Isat	4284A+42841A+42842C	Keysight Technologies		

^{*} Equivalent measurement equipment may be used.

■ ELECTRICAL CHARACTERISTICS

L FREQUENCY CHARACTERISTICS GRAPH

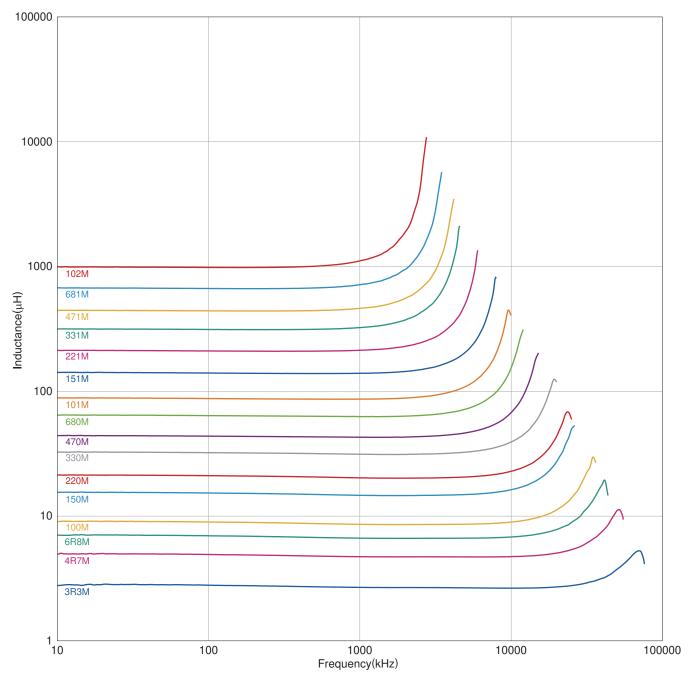


 $\bigcirc \ \text{Measurement equipment}$

Product No.	Manufacturer
4294A	Keysight Technologies

^{*} Equivalent measurement equipment may be used.

■ ELECTRICAL CHARACTERISTICS

□INDUCTANCE VS. DC BIAS CHARACTERISTICS GRAPH

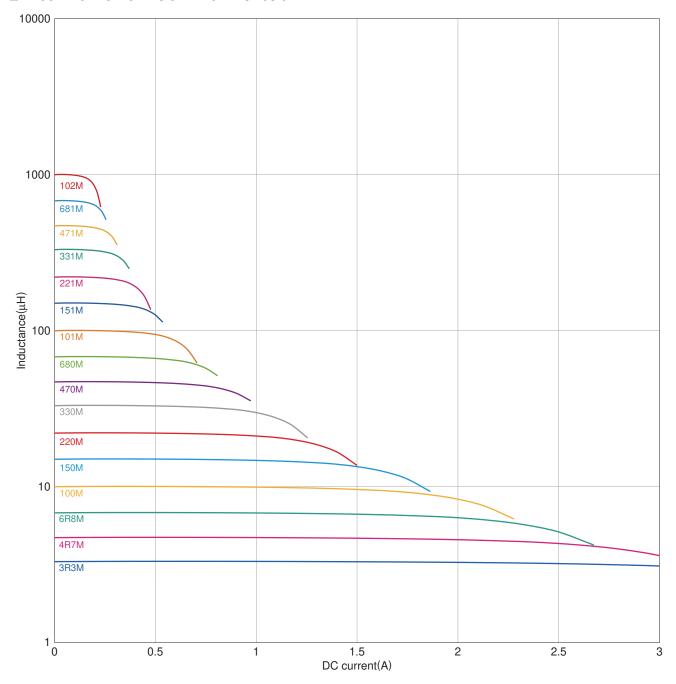


 $\bigcirc \ \text{Measurement equipment}$

Product No.	Manufacturer
4284A+42841A+42842C	Keysight Technologies

^{*} Equivalent measurement equipment may be used.

■PACKAGING STYLE

REEL DIMENSIONS

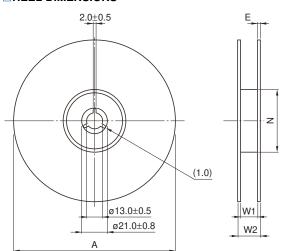

* These values are typical values.

Α

ø330

W1

16.4

W2

22.4


Ν

Ε

Туре

SLF7032

TAPE DIMENSIONS

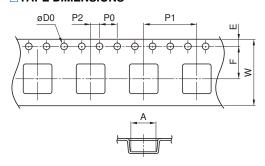



Dimensions in mm

Type	Α	В	øD0	Е	F	P0	P1	P2	W	K	t
SLF7032	7.4	7.6	1.5+0.1/-0	1.75±0.1	7.5±0.1	4.0±0.1	12.0±0.1	2.0±0.05	16.0±0.3	3.6	0.4