# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



### INDUCTORS

**公TDK** 

Inductors for power circuits Wound metal SPM-HZ series (for automotive)



AEC-Q200

# SPM6530-HZ type



#### FEATURES

O Magnetic shield type wound inductor for power circuits using a metallic magnetic material.

- O Compared to ferrite wound type inductors, it is possible to achieve large current, low Rdc, and compactness.
- O Low inductance variance in high-temperature environments with good DC superimposition characteristics. -40 to 125°C (including self-temperature rise)
- O Metallic magnetic material is used, and the structure has an integrated molded coil, so hum noise is lower than with ferrite core adhesive coils.

O Compliant with AEC-Q200

#### APPLICATION

Automotive-related equipment (Car navigation, car audio, electronic power steering, headlights, other)
Application guides: <u>Automotive (xEV)</u>, <u>Car Infotainment</u>

#### PART NUMBER CONSTRUCTION

SPM	6530	T R47		М	HZ
Series name	L×W×H dimensions 7.1×6.5×3.0 mm	Packaging style	Inductance (μH)	Inductance tolerance	Internal code

#### CHARACTERISTICS SPECIFICATION TABLE

L		Measuring frequency	DC resistance	e	Rated curre	ent*	Part No.
(µH)	Tolerance	(kHz)	(m $\Omega$ )max.	<b>(m</b> Ω <b>)typ</b> .	lsat (A)typ.	ltemp (A)typ.	
0.47	±20%	100	3.63	3.3	19.7	20.5	SPM6530T-R47M-HZ
0.68	±20%	100	5.39	4.9	16.6	16.0	SPM6530T-R68M-HZ
1.0	±20%	100	7.81	7.1	13.2	14.4	SPM6530T-1R0M-HZ
1.5	±20%	100	10.67	9.7	9.4	11.6	SPM6530T-1R5M-HZ
2.2	±20%	100	19.03	17.3	8.4	8.4	SPM6530T-2R2M-HZ
3.3	±20%	100	29.70	27.0	6.4	6.9	SPM6530T-3R3M-HZ
4.7	±20%	100	39.38	35.8	6.2	5.6	SPM6530T-4R7M-HZ
5.6	±20%	100	41.25	37.5	5.4	5.4	SPM6530T-5R6M-HZ
6.8	±20%	100	59.95	54.5	4.8	4.8	SPM6530T-6R8M-HZ
10.0	±20%	100	86.35	78.5	3.9	4.2	SPM6530T-100M-HZ
15.0	±20%	100	119.90	109.0	3.0	3.3	SPM6530T-150M-HZ
22.0	±20%	100	200.20	182.0	2.3	2.6	SPM6530T-220M-HZ

\* Rated current: smaller value of either Isat or Itemp.

Isat: When based on the inductance change rate (20% below the initial value)

Itemp: When based on the temperature increase (temperature increase of 40°C by self heating)

#### Measurement equipment

Measurement item	Product No.	Manufacturer
L	4284A	Keysight Technologies
DC resistance	AX-111A	ADEX
Rated current Isat	4284A+42841A+42842C	Keysight Technologies

\* Equivalent measurement equipment may be used.

#### TEMPERATURE RANGE, INDIVIDUAL WEIGHT

Operating temperature range*	Storage temperature range**	Individual weight
–40 to +125 °C	–40 to +125 °C	0.66 g

\* Operating temperature range includes self-temperature rise.

\*\* The storage temperature range is for after the assembly.


A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (1/4) Please note that the contents may change without any prior notice due to reasons such as upgrading.

20180704

### INDUCTORS


## SPM6530-HZ type

#### L FREQUENCY CHARACTERISTICS

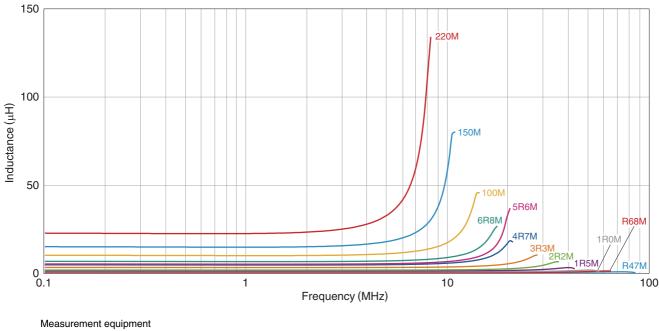

Product No.	Manufacturer	
4294A	Keysight Technologies	
* Equivalent measurement equipment may be used.		


#### ■ INDUCTANCE VS. DC BIAS CHARACTERISTICS

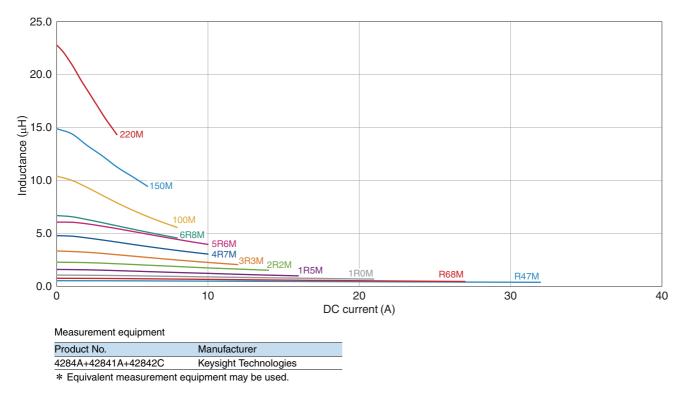


A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (2/4) Please note that the contents may change without any prior notice due to reasons such as upgrading.

# SPM6530-HZ type

#### SHAPE & DIMENSIONS




#### PACKAGING STYLE



Dimensions in mm

#### **TAPE DIMENSIONS**




Туре	А	В	К
SPM6530-HZ	7.4±0.1	7.6±0.1	3.6±0.1

#### **PACKAGE QUANTITY**

Package quantity	1000 pcs/reel





Preheating Soldering Natural cooling Peak 230°C 230°C 230°C 230°C 10s max. 10s max.

RECOMMENDED REFLOW PROFILE

Time

Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (3/4) Please note that the contents may change without any prior notice due to reasons such as upgrading.

20180704

### **REMINDERS FOR USING THESE PRODUCTS**

Before using these products, be sure to request the delivery specifications.

### SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

### **▲** REMINDERS

The storage period is less than 12 months. Be sure to follow the storage conditions (temperature: 5 to 40°C, humidity: 10 to 75% RH or less).

If the storage period elapses, the soldering of the terminal electrodes may deteriorate.

- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.
- If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- $\bigcirc$  Do not use products that have received any excessive mechanical shock such as by being dropped.
- When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Do not expose the products to magnets or magnetic fields.
- O The performance of the product may deteriorate if coating materials are used, thus please assess the situation beforehand by taking this factor into consideration.
- O not use for a purpose outside of the contents regulated in the delivery specifications.
- The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

- (1) Aerospace/aviation equipment
- (2) Transportation equipment (electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

20180704