

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







5V/3.3V DUAL DIFFERENTIAL 2:1 MULTIPLEXER

SY100EL56V

FEATURES

- 3.3V and 5V power supply options
- 440ps propagation delay
- Separate and common select
- High bandwidth output transitions
- Internal 75K Ω input pull-down resistors
- Available in 20-pin SOIC package

DESCRIPTION

The SY100EL56V is a dual, fully differential 2:1 multiplexer. The differential data path makes the device ideal for multiplexing low skew clock or other skew sensitive signals. Multiple V_{BB} pins are provided to ease AC coupling input signals.

The device features both individual and common select inputs to address both data path and random logic applications.

The differential inputs have special circuitry which ensures device stability under open input conditions. When both differential inputs are left open the D input will pull down to $V_{\rm EE}$, the /D input will bias around $V_{\rm CC}/2$ forcing the Q output LOW.

PIN NAMES


Pin	Function
D0a-D1a	Input Data a
D0b-D1b	Input Data b
SEL0-SEL1	Individual Select Input
COM_SEL	Common Select Input
Q0-Q1	True Outputs
/Q0/Q1	Inverted Outputs

TRUTH TABLE

SEL	Data
Н	а
L	b

Micrel, Inc.

PACKAGE/ORDERING INFORMATION



20-Pin Wide SOIC (Z20-1)

Ordering Information⁽¹⁾

Part Number	Package Type	Operating Range	Package Marking	Lead Finish
SY100EL56VZC	Z20-1	Commercial	SY100EL56VZC	Sn-Pb
SY100EL56VZCTR ⁽²⁾	Z20-1	Commercial	SY100EL56VZC	Sn-Pb
SY100EL56VZI Z20-		Industrial	SY100EL56VZI	Sn-Pb
SY100EL56VZITR ⁽²⁾	Z20-1	Industrial	SY100EL56VZI	Sn-Pb
SY100EL56VZG ⁽³⁾	Z20-1	Industrial	SY100EL56VZG with Pb-Free bar-line indicator	Pb-Free NiPdAu
SY100EL56VZGTR ^(2, 3)	Z20-1	Industrial	SY100EL56VZG with Pb-Free bar-line indicator	Pb-Free NiPdAu

Notes:

- 1. Contact factory for die availability. Dice are guaranteed at T_A = 25°C, DC Electricals only.
- 2. Tape and Reel.
- 3. Pb-Free package is recommended for new designs.

PRODUCT/PROCESS INFORMATION

Process:	Bipolar
ESD Rating:	Per Mil Std. 883 Human Body Model, >1.5kV (all pins).

ABSOLUTE MAXIMUM RATINGS(1)

Symbol	Rating		Value	Unit
V _{CC}	Power Supply Voltage (V _{EE} = 0)	+6.0 to 0	V	
V _{EE}	Power Supply Voltage (V _{CC} = 0)	-6.0 to 0	V	
V _{IN}	Input Voltage ($V_{CC} = 0V$, V_{IN} not more negative the Input Voltage ($V_{EE} = 0V$, V_{IN} not more positive that	-6.0 to 0 +6.0 to 0	V V	
l _{OUT}	Output Current	-Continuous -Surge	50 100	mA
T _{LEAD}	Lead Temperature (soldering, 20sec.)		+260	°C
T _A	Operating Temperature Range	-40 to +85	°C	
T _{store}	Storage Temperature Range	-65 to +150	°C	
θ_{JA}	Thermal Resistance (Junction-to-Ambient)	–Still Air –500lfpm	160 109	°C/W
θ_{JC}	Thermal Resistance (Junction-to-Case)	39	°C/W	
ESD	Mil Std. 883 Human Body Model, All Pins		>1.5k	V

Note 1. Permanent device damage may occur if absolute maximum ratings are exceeded. This is a stress rating only and functional operation is not implied at conditions other than those detailed in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

DC ELECTRICAL CHARACTERISTICS(1)

VEE =VEE (Min) to VEE (Max); VCC = GND

		TA = -40°C			TA = 0°C			TA = +25°C			TA = +85°C			
Symbol	Parameter	Min.	Тур.	Max.	Min.	Тур.	Max.	Min.	Тур.	Max.	Min.	Тур.	Max.	Unit
IEE	Power Supply Current	_	20	24	_	20	24	_	20	24	_	20	24	mA
VBB	Output Reference Voltage	-1.38	_	-1.26	-1.38	_	-1.26	-1.38	_	-1.26	-1.38	_	-1.26	V
IIН	Input HIGH Current	_	_	150	_	_	150	_	_	150	_	_	150	μΑ
lıL	Input LOW Current Dn Dn	0.5 -600		_	0.5 600		_	0.5 -600			0.5 600		_	μА
VPP(DC)	Input Sensitivity ⁽²⁾	50	_		50	_		50	_		50	_	_	mV

Note 1. Parametric values specified at: 100EL56V Series: (-3.0V to -3.8V) or (-4.2V to -5.5V).

Note 2. Differential input voltage required to obtain a full ECL swing on the outputs.

AC ELECTRICAL CHARACTERISTICS


VEE =VEE (Min) to VEE (Max); VCC = GND

		T.	A = -40°	°C	1	ΓA = 0°0)	Ta	= +25°	С	T,	A = +85	°C	
Symbol	Parameter	Min.	Тур.	Max.	Min.	Тур.	Max.	Min.	Тур.	Max.	Min.	Тур.	Max.	Unit
tPD	Propagation D (Diff) Delay D (SE) to Output SEL COM_SEL	340 290 430 430		540 590 730 730	350 300 440 440		550 600 740 740	360 310 440 440		560 610 740 740	380 330 450 450		580 630 750 750	ps
tskew	Within Device Skew ⁽¹⁾ Duty Cycle Skew ⁽²⁾	_ _	40 —	80 100		40 —	80 100		40 —	80 100		40 —	80 100	ps ps
VPP(AC)	Minimum Input Swing ⁽³⁾	150	_	1000	150	_	1000	150	_	1000	150	_	1000	mV
VCMR	Common Mode Range VEE = $-3.0V$ to $-3.8V^{(4)}$ VPP < $500mV$ VPP $\geq 500mV$	-2.0 -1.8	_	-0.4 -0.4	-2.1 -1.9	_	-0.4 -0.4	-2.1 -1.9	_	-0.4 -0.4	-2.1 -1.9	_	-0.4 -0.4	٧
	VEE = $-4.2V$ to $-5.5V^{(5)}$ VPP < $500mV$ VPP $\geq 500mV$	-3.2 -3.0	_ _	-0.4 -0.4	-3.3 -3.1	_	-0.4 -0.4	-3.3 -3.1	_	-0.4 -0.4	-3.3 -3.1	_ _	-0.4 -0.4	
tr tf	Output Rise/Fall Times Q (20% –80%)	200	_	540	200		540	200	_	540	200	_	540	ps

- Note 1. Within device skew is defined as identical transitions on similar paths through a device.
- **Note 2.** Duty cycle skew is defined only for differential operation when the delays are measured from the cross point of the inputs to the cross point of the outputs.
- Note 3. Minimum input swing for which AC parameters are guaranteed.
- Note 4. The CMR range is referenced to the most positive side of the differential input signal. Normal operation is obtained if the HIGH level falls within the specified range and the peak-to-peak voltage lies between $V_{PP}(min)$ and 1V. The lower end of the CMR range varies 1:1 with V_{EE} . The numbers in the spec table assume a nominal $V_{EE} = -3.3V$. Note for PECL operation, the V_{CMR} (min) will be fixed at $3.3V |V_{CMR}|$ (min)].
- Note 5. The CMR range is referenced to the most positive side of the differential input signal. Normal operation is obtained if the HIGH level falls within the specified range and the peak-to-peak voltage lies between $V_{PP}(min)$ and 1V. The lower end of the CMR range varies 1:1 with V_{EE} . The numbers in the spec table assume a nominal $V_{EE} = -4.5V$. Note for PECL operation, the V_{CMR} (min) will be fixed at $5.0V |V_{CMR}$ (min)|.

Micrel, Inc. SY100EL56V

20-PIN SOIC .300" WIDE (Z20-1)

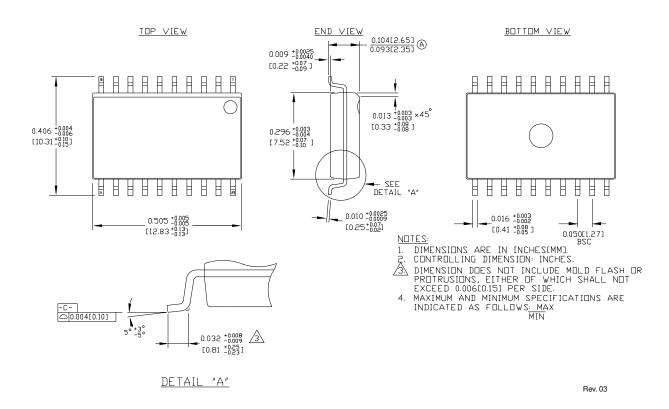

Package Notes:

Note 1. Package meets Level 1 moisture sensitivity.

MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA

TEL + 1 (408) 944-0800 FAX + 1 (408) 474-1000 WEB http://www.micrel.com

The information furnished by Micrel in this datasheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use.

Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is at Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2006 Micrel, Incorporated.