

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









TRIPLE DIFFERENTIAL 2:1 MULTIPLEXER

SY10E457 SY100E457

FEATURES

- Differential D and Q
- Extended 100E VEE range of -4.2V to -5.5V
- VBB output for single-ended use
- 700ps max. propagation delay
- **■** High frequency outputs
- Separate and common select
- Internal 75K Ω input pulldown resistors
- Available in 28-pin PLCC package


DESCRIPTION

The SY10/100E457 are 3-bit differential 2:1 multiplexers. The fully differential data path makes the devices ideal for multiplexing low skew clock or other skew sensitive signals. Multiple VBB pins are provided to ease AC coupling input signals.

The higher frequency outputs provide the device with a >1.0GHz bandwidth to meet the needs of the most demanding system clock.

Both separate selects and a common select are provided to make the device well suited for both data path and random logic applications.


BLOCK DIAGRAM

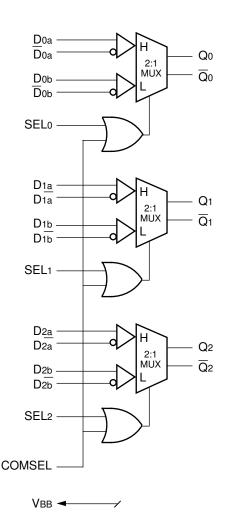

PIN NAMES

Pin	Function
Dn[0:2], Dn[0:2]	Differential Data Inputs
SEL	Individual Select Input
COMSEL	Common Select Input
VBB	VBB Reference Output
Q[0:2], Q[0:2]	Differential Data Outputs
Vcco	Vcc to Output

PACKAGE/ORDERING INFORMATION



28-Pin PLCC (J28-1)

Ordering Information⁽¹⁾

Part Number	Package Type	Operating Range	Package Marking	Lead Finish
SY10E457JC	J28-1	Commercial	SY10E457JC	Sn-Pb
SY10E457JCTR ⁽²⁾	J28-1	Commercial	SY10E457JC	Sn-Pb
SY100E457JC	J28-1	Commercial	SY100E457JC	Sn-Pb
SY100E457JCTR ⁽²⁾	J28-1	Commercial	SY100E457JC	Sn-Pb
SY10E457JZ ⁽³⁾	J28-1	Commercial	SY10E457JZ with Pb-Free bar-line indicator	Matte-Sn
SY10E457JZTR ^(2, 3)	J28-1	Commercial	SY10E457JZ with Pb-Free bar-line indicator	Matte-Sn
SY100E457JZ ⁽³⁾	J28-1	Commercial	SY100E457JZ with Pb-Free bar-line indicator	Matte-Sn
SY100E457JZTR ^(2, 3)	J28-1	Commercial	SY100E457JZ with Pb-Free bar-line indicator	Matte-Sn

Notes

- 1. Contact factory for die availability. Dice are guaranteed at T_A = 25°C, DC Electricals only.
- 2. Tape and Reel.
- 3. Pb-Free package is recommended for new designs.

DC ELECTRICAL CHARACTERISTICS

VEE = VEE (Min.) to VEE (Max.); VCC = VCCO = GND

		TA = 0°C			TA = +25°C			TA = +85°C				
Symbol	Parameter	Min.	Тур.	Max.	Min.	Тур.	Max.	Min.	Тур.	Max.	Unit	Condition
Vвв	Output Reference Voltage										٧	_
	10E	-1.38	_	-1.27	-1.35	—	-1.25	-1.31	—	-1.19		
	100E	-1.38	_	-1.26	-1.38	_	-1.26	-1.38	_	-1.26		
Іін	Input HIGH Current	_		150	_	_	150	_	_	150	μΑ	_
IEE	Power Supply Current										mA	_
	10E	_	92	110	l —	92	110	—	92	110		
	100E	_	92	110	—	92	110	_	106	127		
VPP (DC)	Input Sensitivity	50	_	_	50		_	50		_	mV	1
VCMR	Common Mode Range	-1.5	_	0	-1.5	_	0	-1.5	_	0	V	2

Notes:

- 1. Differential input voltage required to obtain a full ECL swing on the outputs.
- 2. VCMR is referenced to the most positive side of the differential input signal. Normal operation is obtained when the input signals are within the VCMR range and the input swing is greater than VPP (min.) and <1V.

AC ELECTRICAL CHARACTERISTICS


VEE = VEE (Min.) to VEE (Max.); VCC = VCCO = GND

		TA = 0°C		T _A = +25°C			TA = +85°C					
Symbol	Parameter	Min.	Тур.	Max.	Min.	Тур.	Max.	Min.	Тур.	Max.	Unit	Condition
tPD	Propagation Delay to Output D (Diff) D SEL COMSEL	375 325 350 375	475 475 500 525	650 700 725 750	375 325 350 375	475 475 500 525	650 700 725 750	375 325 350 375	475 475 500 525	650 700 725 750	ps	_
tskew	Within-Device Skew	_	40	_	_	40	_	_	40	_	ps	1
tskew	Duty Cycle Skew tPLH-tPHL	_	±10	_	_	±10	_	_	±10		ps	2
VPP (AC)	Minimum Input Swing	150	_	_	150	_	_	150	_		mV	3
tr tf	Rise/Fall Time 20–80%	150	275	450	150	275	450	150	275	450	ps	_

Notes:

- 1. Within-device skew is defined as identical transitions on similar paths through a device.
- 2. Duty cycle skew guarantee holds only for differential operation when the delays are measured from the cross point of the inputs to the cross point of the outputs.
- 3. Minimum input swing for which AC parameters are guaranteed.

28-PIN PLCC (J28-1)

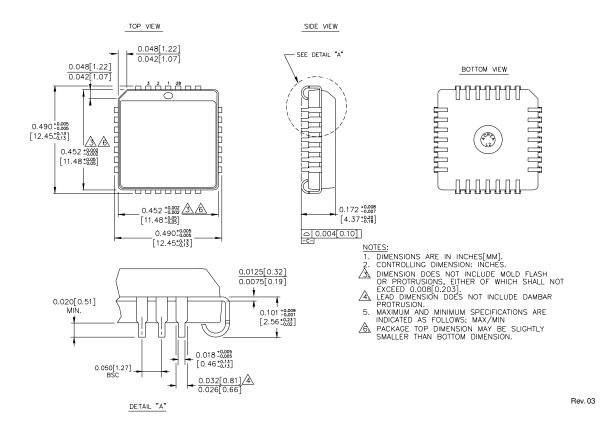

MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA

TEL + 1 (408) 944-0800 FAX + 1 (408) 474-1000 WEB http://www.micrel.com

The information furnished by Micrel in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use.

Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is at Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2006 Micrel, Incorporated.