# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





### FEATURES

- 230ps propagation delay
- High bandwidth output transitions
- Internal 75KΩ input pull-down resistors
- Available in 8-pin SOIC package

### DESCRIPTION

The SY10/100EL01 are 4-input OR/NOR gates. These devices are functionally equivalent to the E101 devices, with higher performance capabilities. With propagation delays and output transition times significantly faster than the E101, the EL01 is ideally suited for those applications which require the ultimate in AC performance.


### **PIN NAMES**

Pin	Function
D0–D3	Data Inputs
Q	Data Outputs

Pb-Free

NiPdAu

### **PACKAGE/ORDERING INFORMATION**



8-Pin SOIC (Z8-1)

### Ordering Information<sup>(1)</sup> Package Operating Package Lead Part Number Туре Range Marking Finish SY10EL01ZC HEL01 Z8-1 Commercial Sn-Pb SY10EL01ZCTR<sup>(2)</sup> Sn-Pb Z8-1 Commercial HEL01 Z8-1 SY100EL01ZC Commercial XEL01 Sn-Pb SY100EL01ZCTR<sup>(2)</sup> Z8-1 Commercial XEL01 Sn-Pb SY10EL01ZI Z8-1 Industrial HEL01 Sn-Pb SY10EL01ZITR<sup>(2)</sup> Z8-1 Industrial HEL01 Sn-Pb SY100EL01ZI Z8-1 Industrial XEL01 Sn-Pb SY100EL01ZITR<sup>(2)</sup> Z8-1 Industrial XEL01 Sn-Pb SY10EL01ZG<sup>(3)</sup> Z8-1 Industrial HEL01 with Pb-Free Pb-Free bar-line indicator NiPdAu SY10EL01ZGTR<sup>(2, 3)</sup> HEL01 with Pb-Free Z8-1 Industrial Pb-Free bar-line indicator NiPdAu SY100EL01ZG<sup>(3)</sup> Z8-1 Industrial XEL01 with Pb-Free Pb-Free bar-line indicator NiPdAu

### Notes:

1. Contact factory for die availability. Dice are guaranteed at  $T_A = 25^{\circ}C$ , DC Electricals only.

Industrial

XEL01 with

Pb-Free bar-line indicator

Z8-1

2. Tape and Reel.

SY100EL01ZGTR<sup>(2, 3)</sup>

3. Pb-Free package is recommended for new designs.

### DC ELECTRICAL CHARACTERISTICS

VEE = VEE (Min.) to VEE (Max.); VCC = GND


		TA = -40°C			TA = 0°C			TA = +25°C			TA = +85°C			
Symbol	Parameter	Min.	Тур.	Max.	Min.	Тур.	Max.	Min.	Тур.	Max.	Min.	Тур.	Max.	Unit
IEE	Power Supply Current													mA
	10EL	—	14	17	11	14	17	11	14	17	11	14	17	
	100EL	—	14	17	11	14	17	11	14	17	13	16	20	
VEE	Power Supply Voltage													V
	10EL	-4.75	-5.2	-5.5	-4.75	-5.2	-5.5	-4.75	-5.2	-5.5	-4.75	-5.2	-5.5	
	100EL	-4.20	-4.5	-5.5	-4.20	-4.5	-5.5	-4.20	-4.5	-5.5	-4.20	-4.5	-5.5	
Іін	Input HIGH Current	_	-	150	_	—	150	_	_	150		_	150	μA

### **AC ELECTRICAL CHARACTERISTICS**

VEE = VEE (Min.) to VEE (Max.); VCC = GND

		TA = −40°C			TA = 0°C			TA = +25°C			TA = +85°C			
Symbol	Parameter	Min.	Тур.	Max.	Min.	Тур.	Max.	Min.	Тур.	Max.	Min.	Тур.	Max.	Unit
tPD	Propagation Delay to Output D	70	220	370	120	220	320	130	230	330	150	250	350	ps
tr tf	Output Rise/Fall Times Q (20% to 80%)	70	225	350	100	225	350	100	225	350	100	225	350	ps

### 8-PIN SOIC .150" WIDE (Z8-1)

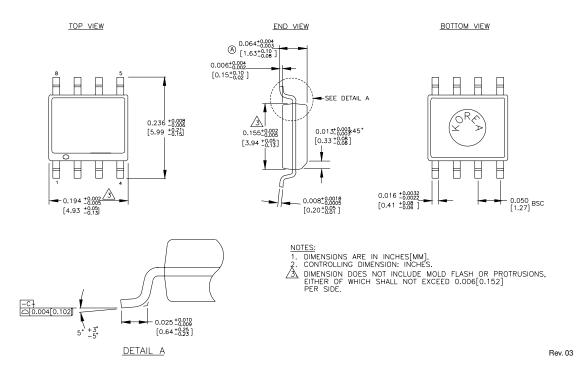

### MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA

TEL + 1 (408) 944-0800 FAX + 1 (408) 474-1000 WEB http://www.micrel.com

The information furnished by Micrel in this datasheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is at Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2006 Micrel, Incorporated.