# mail

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





#### D FLIP-FLOP WITH SET AND RESET

SY10EL31 SY100EL31

#### FEATURES

- 475ps propagation delay
- 2.8GHz toggle frequency
- Internal 75KΩ input pull-down resistors
- Available in 8-pin SOIC package

#### DESCRIPTION

The SY10/100EL31 are D flip-flops with set and reset. The devices are functionally equivalent to the E131 devices, with higher performance capabilities. With propagation delays and output transition times significantly faster than the E131, the EL31 is ideally suited for those applications which require the ultimate in AC performance.

Both the set and reset inputs are asynchronous, level triggered signals. Data enters the master portion of the flip-flop when the clock is LOW and is transferred to the slave, and thus the outputs, upon a positive transition of the clock.

#### **PIN NAMES**

| Pin | Function     |
|-----|--------------|
| D   | Data Inputs  |
| Q   | Data Outputs |
| S   | Set          |
| R   | Reset        |
| CLK | Clock Input  |


#### TRUTH TABLE<sup>(1)</sup>

| D | S | R | CLK | Q     |
|---|---|---|-----|-------|
| L | L | L | Z   | L     |
| Н | L | L | Z   | Н     |
| Х | Н | L | Х   | Н     |
| Х | L | Н | Х   | L     |
| Х | Н | Н | Х   | Undef |

NOTE:

1. Z = LOW-to-HIGH transition.

# PACKAGE/ORDERING INFORMATION



8-Pin SOIC (Z8-1)

| Ordering Information <sup>(1)</sup> |                    |            |   |                   |  |  |  |  |  |  |
|-------------------------------------|--------------------|------------|---|-------------------|--|--|--|--|--|--|
| Part Number                         | umber Package Type |            | Package<br>Marking                                  | Lead<br>Finish    |  |  |  |  |  |  |
| SY10EL31ZC                          | Z8-1               | Commercial | HEL31   | Sn-Pb             |  |  |  |  |  |  |
| SY10EL31ZCTR <sup>(2)</sup>         | Z8-1               | Commercial | HEL31   | Sn-Pb             |  |  |  |  |  |  |
| SY100EL31ZC                         | Z8-1               | Commercial | XEL31   | Sn-Pb             |  |  |  |  |  |  |
| SY100EL31ZCTR <sup>(2)</sup>        | Z8-1               | Commercial | XEL31   | Sn-Pb             |  |  |  |  |  |  |
| SY10EL31ZI                          | Z8-1               | Industrial | HEL31   | Sn-Pb             |  |  |  |  |  |  |
| SY10EL31ZITR <sup>(2)</sup>         | Z8-1               | Industrial | HEL31   | Sn-Pb             |  |  |  |  |  |  |
| SY100EL31ZI                         | Z8-1               | Industrial | XEL31   | Sn-Pb             |  |  |  |  |  |  |
| SY100EL31ZITR <sup>(2)</sup>        | Z8-1               | Industrial | XEL31   | Sn-Pb             |  |  |  |  |  |  |
| SY10EL31ZG <sup>(3)</sup>           | Z8-1               | Industrial | HEL31 with<br>Pb-Free bar-line indicator            | Pb-Free<br>NiPdAu |  |  |  |  |  |  |
| SY10EL31ZGTR <sup>(2, 3)</sup>      | Z8-1               | Industrial | HEL31 with<br>Pb-Free bar-line indicator            | Pb-Free<br>NiPdAu |  |  |  |  |  |  |
| SY100EL31ZG <sup>(3)</sup>          | Z8-1               | Industrial | XEL31 with<br>Pb-Free bar-line indicator            | Pb-Free<br>NiPdAu |  |  |  |  |  |  |
| SY100EL31ZGTR <sup>(2, 3)</sup>     | Z8-1               | Industrial | Industrial XEL31 with<br>Pb-Free bar-line indicator |                   |  |  |  |  |  |  |

Notes:

1. Contact factory for die availability. Dice are guaranteed at  $T_{\rm A}$  = 25°C, DC Electricals only.

2. Tape and Reel.

3. Pb-Free package is recommended for new designs.

ts

tн

tr

tf

Max.

\_

645

645

\_

\_\_\_\_

\_

\_\_\_\_

350

Unit

GHz

ps

ps

ps

ps

ps

ps

## **DC ELECTRICAL CHARACTERISTICS**

VEE = VEE (Min.) to VEE (Max.); VCC = GND


|        |                      | TA = -40°C |      | TA = 0°C |       | TA = +25°C |      | TA = +85°C |      |      |       |      |      |      |
|--------|----------------------|------------|------|----------|-------|------------|------|------------|------|------|-------|------|------|------|
| Symbol | Parameter            | Min.       | Тур. | Max.     | Min.  | Тур.       | Max. | Min.       | Тур. | Max. | Min.  | Тур. | Max. | Unit |
| IEE    | Power Supply Current |            |      |          |       |            |      |            |      |      |       |      |      | mA   |
|        | 10EL                 | —          | 27   | 32       | 18    | 27         | 32   | 18         | 27   | 32   | 18    | 27   | 32   |      |
|        | 100EL                | —          | 27   | 32       | 18    | 27         | 32   | 18         | 27   | 32   | 21    | 31   | 37   |      |
| VEE    | Power Supply Voltage |            |      |          |       |            |      |            |      |      |       |      |      | V    |
|        | 10EL                 | -4.75      | -5.2 | -5.5     | -4.75 | -5.2       | -5.5 | -4.75      | -5.2 | -5.5 | -4.75 | -5.2 | -5.5 |      |
|        | 100EL                | -4.20      | -4.5 | -5.5     | -4.20 | -4.5       | -5.5 | -4.20      | -4.5 | -5.5 | -4.20 | -4.5 | -5.5 |      |
| Іін    | Input HIGH Current   | —          |      | 150      |       |            | 150  | —          |      | 150  | _     |      | 150  | μA   |

### **AC ELECTRICAL CHARACTERISTICS**

TA = -40°C  $TA = 0^{\circ}C$ TA = +25°C TA = +85°C Min. Min. Min. Symbol Parameter Тур. Max. Тур. Max. Тур. Max. Min. Тур. Maximum Toggle 20 2.5 2.2 2.8 2.2 2.8 2.2 2.8 **f**MAX \_ \_ \_ Frequency Propagation Delay to tPD 465 375 475 Output CLK 315 630 365 465 580 590 430 530 S, R 295 455 630 345 455 580 355 465 590 400 510 150 0 0 Set-up Time 150 0 150 150 0 \_ \_\_\_\_ Hold Time 250 100 250 100 250 100 250 100 \_\_\_\_ \_\_\_\_ \_\_\_\_ Set/Reset Recovery 400 200 400 200 400 200 200 trr 400 \_ \_ \_\_\_\_ Minimum Pulse Width 400 \_ 400 400 400 tPW \_\_\_\_ \_\_\_\_ \_ \_\_\_\_ \_\_\_\_ \_\_\_\_ CLK, Set, Reset Output Rise/Fall Times Q 100 225 100 225 350 100 225 225 350 350 100 (20% to 80%)

VEE = VEE (Min.) to VEE (Max.); VCC = GND

#### 8-PIN SOIC .150" WIDE (Z8-1)

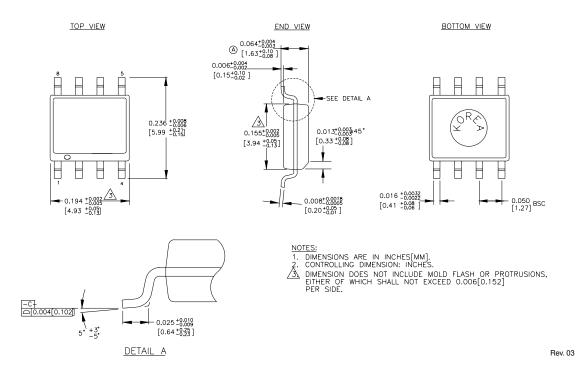

MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA

TEL + 1 (408) 944-0800 FAX + 1 (408) 474-1000 WEB http://www.micrel.com

The information furnished by Micrel in this datasheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is at Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2005 Micrel, Incorporated.