

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









### **FEATURES**

- Single 3.3V or 5V power supply
- Up to 155Mbps operation
- Modulation current to 30mA
- **■** PECL output enable
- **■** Differential PECL inputs
- Available in a tiny 10-pin (3mm) MSOP

### **APPLICATIONS**

■ 155Mbps SONET


### **DESCRIPTION**

The SY88822V is a high speed current switch for driving a semiconductor laser diode in optical transmission applications. The modulation current ( $I_{OUT}$ ) is controlled by the current ( $I_{RSET}$ ) through the external resistor  $R_{SET}$ . The output OUT is HIGH and no current flows through OUT when output enable is HIGH.

The device incorporates complementary open collector outputs with a 30mA maximum current driving capability. The external resistor  $R_{\text{EXT}}$  must be placed between /OUT and  $V_{\text{CC}}$  to dissipate the worst case power.  $R_{\text{SER}}$  is recommended to compensate for laser diode matching issues. Pin 9 and pin 10 should be connected to achieve better performance.


The SY88822V utilizes the high performance bipolar ASSET™ technology.

### **FUNCTIONAL BLOCK DIAGRAM**

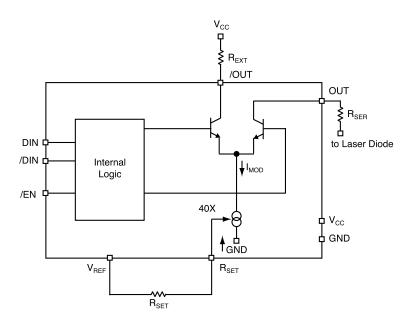

ASSET is a trademark of Micrel, Inc.

## PACKAGE/ORDERING INFORMATION



# **Ordering Information**

Part Number	Package Type	Operating Range	Package Marking	Lead Finish
SY88822VKC	K10-1	Commercial	822V	Sn-Pb
SY88822VKCTR <sup>(1)</sup>	K10-1	Commercial	822V	Sn-Pb
SY88822VKG	K10-1	Industrial	822V with Pb-Free bar-line indicator	Pb-Free NiPdAu
SY88822VKGTR <sup>(1)</sup>	K10-1	Industrial	822V with Pb-Free bar-line indicator	Pb-Free NiPdAu

#### Note:

1. Tape and Reel.

## PIN DESCRIPTION

Pin Number	Pin Name	Pin Function
1	/EN	100k PECL compatible input $$ w/ $75k\Omega$ pulldown resistor. Modulation current goes to zero when deasserted high.
2, 3	DIN, /DIN	Differential 100k PECL compatible input $$ w/ $75k\Omega$ pulldown resistors.
4	VREF	Voltage reference for use with R <sub>SET</sub> .
5	RSET	An external resistor from here to V <sub>REF</sub> sets the reference current for I <sub>OUT</sub> .
6	VCC	Positive power supply.
7	GND	Device ground.
8, 9, 10	/OUT, OUT	Differential open collector current outputs.

# TRUTH TABLE<sup>(1)</sup>

D	/D	/EN	OUT (Note 2)	/OUT
L	Н	L	Н	L
Н	L	L	L	Н
Х	Х	Н	Н	L

#### Notes

- 1. L = LOW, H = HIGH, X = don't care.
- **2.**  $H = I_{OUT} = 0mA$ .

# **Absolute Maximum Ratings**(1)

Power Supply Voltage (V <sub>CC</sub> )	0V to +7.0V
Input Voltage (V <sub>IN</sub> )	0V to V <sub>CC</sub>
Output Current (I <sub>OUT</sub> )	30mA
Power Dissipation (P <sub>D</sub> )	250mW
Lead Temperature (soldering, 20 sec.).	+260°C
Storage Temperature Range (T <sub>S</sub> )	–55°C to +125°C

# Operating Ratings<sup>(2, 3, 4)</sup>

Supply Voltage (V <sub>IN</sub> )	+3.0V to +3.6V
	or +4.5V to +5.5V
Ambient Temperature (T <sub>A</sub> ), Note 5	–40°C to +85°C
Junction Temperature (T <sub>J</sub> ), <b>Note 5</b>	–40°C to 100°C
Resistor to Dissipate Power (R <sub>EXT</sub> )	10 $\Omega$ to 50 $\Omega$
Laser Diode Serial Resistor (R <sub>SFR</sub> )	0 $\Omega$ to $50\Omega$
Resistor to Adjust Current (R <sub>SFT</sub> ), Note 6	
	$700\Omega$ to $20{,}000\Omega$
Package Thermal Resistance	
MSOP	
(θ <sub>JA</sub> ) Still-Air	113°C/W
(ψ <sub>JB</sub> ) Still-Air	74°C/W

## DC ELECTRICAL CHARACTERISTICS<sup>(7)</sup>

GND = 0V;  $V_{CC}$  = 3.3V ±10% or  $V_{CC}$  = 5.0V ±10%;  $T_A$  =  $-40^{\circ}C$  to +85°C

Symbol	Parameter	Condition	Min	Тур	Max	Units
V <sub>IH</sub>	Input HIGH Voltage (D <sub>IN</sub> , /D <sub>IN</sub> , /EN)		V <sub>CC</sub> -1.165		V <sub>CC</sub> -0.880	V
V <sub>IL</sub>	Input LOW Voltage (D <sub>IN</sub> , /D <sub>IN</sub> , /EN)		V <sub>CC</sub> -1.810		V <sub>CC</sub> -1.475	V
V <sub>REF</sub>	Reference Voltage		1.7	2.0	2.3	V
I <sub>IL</sub>	Input LOW Current (D <sub>IN</sub> , /D <sub>IN</sub> , /EN)	$V_{I} = V_{IL(min)}$	0.5			μА
I <sub>IH</sub>	Input HIGH Current (D <sub>IN</sub> , /D <sub>IN</sub> , /EN)				100	μА
I <sub>cc</sub>	Supply Current	I <sub>MOD</sub> = 25mA			25	mA
I <sub>OUT_OFF</sub>	Output LOW Current (/EN = HIGH)			450	1000	μА
I <sub>OUT</sub>	Modulation Current				30	mA
A <sub>RSET</sub>	I <sub>OUT</sub> /I <sub>RSET</sub>		30	38	44	_
V <sub>OUT</sub>	Voltage at OUT, /OUT		V <sub>CC</sub> -1.4		V <sub>CC</sub>	V
C <sub>OUT</sub>	Capacitance on OUT, /OUT			2.5		pF

#### Notes:

- 1. Permanent device damage may occur if absolute maximum ratings are exceeded. This is a stress rating only and functional operation is not implied at conditions other than those detailed in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.
- 2. The data sheet limits are not guaranteed if the device is operated beyond the operating ratings.
- 3. The device is guaranteed to meet the DC specifications, shown in the table above, after thermal equilibrium has been established. The device is tested in a socket such that transverse airflow of ≥500lfpm is maintained.
- 4. The voltage drop across  $R_{\text{EXT}}$  and  $R_{\text{SER}}$  plus Laser Diode must not be greater than 1.4V.
- 5. Commercial devices are guaranteed from  $0^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  ambient temperature.
- 6.  $R_{SFT}$  minimum 430 $\Omega$ .
- 7. Specification for packaged product only.

## AC ELECTRICAL CHARACTERISTICS(8, 9)


 $I_{MOD}$  =10mA; GND = 0V;  $V_{CC}$  = 3.3V  $\pm10\%$  or  $V_{CC}$  = 5.0V  $\pm10\%$ ;  $T_{A}$  =  $-40^{\circ}C$  to +85°C

Symbol	Parameter	Condition	Min	Тур	Max	Units
t <sub>PHL</sub> , t <sub>PLH</sub> D	Propagation Delay D <sub>IN</sub> – OUT	I <sub>OUT</sub> = 10mA			1000	ps
t <sub>PHL</sub> , t <sub>PLH</sub> EN	Propagation Delay /EN – OUT	I <sub>OUT</sub> = 10mA			1000	ps
t <sub>r</sub> , t <sub>f</sub>	Rise/Fall Time (20% to 80%)				1000	ps
I <sub>OR</sub>	Output Current Ringing	I <sub>OUT</sub> = 5 to 30mA			10	%

#### Notes:


- 8. Specification for packaged product only.
- 9.  $R_{EXT}$  =  $R_{SER}$  = 25 $\Omega$  ±1%;  $R_{SER}$  connected directly to VCC.

## **TYPICAL OPERATING CHARACTERISTICS**



Micrel, Inc. SY88822V

### 10 LEAD MSOP (K10-1)

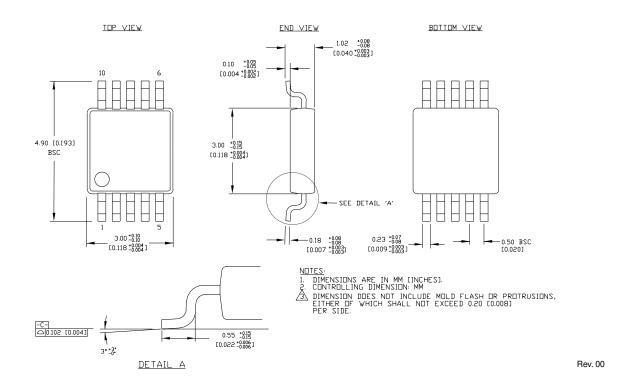

#### MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA

TEL + 1 (408) 944-0800 FAX + 1 (408) 474-1000 WEB http://www.micrel.com

The information furnished by Micrel in this datasheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use.

Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is at Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2005 Micrel, Incorporated