imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



TCFGA0J106M8I



Data Sheet


Chip tantalum capacitors (Fail-safe open structure type)


TCFG Series A Case

Features

- 1) Safety design by open function built in.
- 2) Wide capacitance range
- 3) Screening by thermal shock.

•Dimensions (Unit : mm)



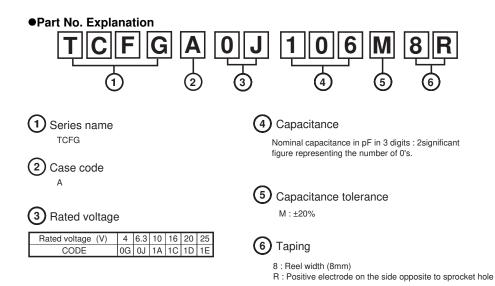

Capacitance range

(Rated volta	age (V.DC)		
(μF)	4	6.3	10	16	20	25
1.0 (105)				А	A	А
1.5 (155)			А	А	A	А
2.2 (225)			А	А	A	А
3.3 (335)		A	А	А	A	А
4.7 (475)	А	А	А	А	А	А
6.8 (685)	A	A	А	А		
10 (106)	A	A	А	А		
15 (156)	А	А	А			
22 (226)	A	А	А			
33 (336)	A	A				
47 (476)	A	А				
68 (686)	A					

Remark) Case size codes (A) in the above show each size products line-up.

Marking

The indications listed below should be given on the surface of a capacitor.


Polarity : The polarity should be shown by □bar. (on the anode side)
 Rated DC voltage : Due to the small size of A case, a voltage code is used as shown below.
 Nominal capacitance

Voltage Code	Rated Voltage(V)
G	4
J	6.3
A	10
С	16
D	20
E	25

Capacitance Code	Nominal Capacitance (μF)
105	1.0
155	1.5
225	2.2
335	3.3
475	4.7
685	6.8
106	10
156	15
226	22
336	33
476	47
686	68

[A Case] note 1) Visual typical example (1)voltage code (2) capacitance code

> J 106 $\overline{(1)}$ $\overline{(2)}$



note 2) voltage code and capacitance code are variable with parts number

Item	I					Perf	orma	ance	(Test conditions based on JIS C5101-1 and JIS C5101-3)		
Operating Tem	perature	-5	5 °C	to +12	25 °	С			Volta	age reduction when temperature exceeds +85°C		
Maximum operatir with no voltage de		+8	5 °C									
Rated Voltage	(V.DC)	4	6.3	10	16	20	25		at 8	5°C		
Category Volta	ge (V.DC)	2.5	4	6.3 [·]	10	13	16		at 1	25°C		
Surge Voltage		5.0	8	13 2	20	26	32		at 8	5°C		
DC leakage cu	rrent	0.5μA or 0.01CV whichever is greater (Shown in "Standard list")				As per 4.9 JIS C 5101-1 As per 4.5.1 JIS C 5101-3 Voltage : Rated voltage for 1min						
Capacitance to	lerance	Shall be satisfied allowance range. ±20%			e range.	As per 4.7 JIS C 5101-1 As per 4.5.2 JIS C 5101-3 Measuring frequency : 120±12Hz Measuring voltage : 0.5Vrms, +1.5V.DC Measuring circuit : DC Equivalent series						
Tangent of loss (Df, tanδ)	angle	Shall be satisfied the voltage on "Standard list"			je on "Standard list"	As per 4.8 JIS C 5101-1 As per 4.5.3 JIS C 5101-3 Measuring frequency : 120±12Hz Measuring voltage : 0.5Vrms, +1.5V.DC Measuring circuit : DC Equivalent series						
Impedance		Sh	Shall be satisfied the voltage on "Standard list"		As per 4.10 JIS C 5101-1 As per 4.5.4 JIS C 5101-3 Measuring frequency : 100±10kHz Measuring voltage : 0.5Vrms or less							
Resistance to soldering heat	Appearance	There should be no significant abnormality. The indications should be clear.				As per 4.14 JIS C 5101-1 As per 4.6 JIS C 5101-3						
-	L.C	Les	ss tha	an initi	al lir	nit			Dip in the solder bath Solder temp : 260±5°C			
	ΔC / C	Wit	thin ±	5% of	f init	tial v	alue		 Solder temp : 260±5°C Duration : 5±0.5s Repetition : 1 After the specimens, leave it at room temperature for over 24h and then measure the sample. 			
	tanδ	Les	ss tha	an initi	al lir	nit						
Fail-Safe open	unit actuation	Wit	thin 3	320°C	- 2	20s				in the solder bath Solder temp : 320±5°C		
Temperature cycle	Appearance			hould ication				ant abnormality. clear.	As p As p	per 4.16 JIS C 5101-1 per 4.10 JIS C 5101-3		
	L.C	Les	ss tha	an initi	al lir	nit				etition : 5 cycles (1 cycle : steps 1 to 4)		
	AC / C	ТС	$\begin{array}{llllllllllllllllllllllllllllllllllll$		WILL	out discontinuation.						
	2070	TC	FGA			R: V	Vithir	$\pm 15\%$ of initial value		StepTemp.Time1-55±3°C30±3min2Room temp.3min. or less		
	tanð	TC Otł	FGA		6M8	8R:V :V	Vithir	$\pm 15\%$ of initial value	Afte	1 –55±3°C 30±3min		
Moisture resistance		TC Oth Les	FGA ners ss that ere s	0G686 an initi	6M8 al lir be r	no się	Vithir Vithir	n ±15% of initial value n ±10% of initial value	After over	1 -55±3°C 30±3min 2 Room temp. 3min. or less 3 125±2°C 30±3min 4 Room temp. 3min. or less r the specimens, leave it at room temperature for		
	tanð	TC Oth Less The The	FGA ners ss that ere s e ind	0G686 an initi hould	al lir	no sig	Vithir Vithir	n ±15% of initial value n ±10% of initial value	After over As p As p	1 -55±3°C 30±3min 2 Room temp. 3min. or less 3 125±2°C 30±3min 4 Room temp. 3min. or less r the specimens, leave it at room temperature for 24h and then measure the sample. ver 4.12 JIS C 5101-1 ver 4.12 JIS C 5101-3 r leaving the sample under such atmospheric		
	tanð Appearance	TC Oth Les The Les	FGA ners ss that ere s e ind ss that	0G686 an initi hould ication	6M8 al lir be r Is sh al lir	no signould	Vithir Vithir gnific	n ±15% of initial value n ±10% of initial value ant abnormality. clear.	After over As p After cond	1 $-55\pm 3^{\circ}$ C $30\pm 3min$ 2Room temp. $3min. \text{ or less}$ 3 $125\pm 2^{\circ}$ C $30\pm 3min$ 4Room temp. $3min. \text{ or less}$ r the specimens, leave it at room temperature for 24h and then measure the sample.per 4.12 JIS C 5101-1per 4.12 JIS C 5101-3		

Iter	n	Performance	Test conditions (based on JIS C5101-1 and JIS C5101-3)
Temperature	Temp.	–55°C	As per 4.29 JIS C 5101-1
Stability	ΔC / C	Within 0/-12% of initial value	As per 4.13 JIS C 5101-3
	tanδ	Shall be satisfied the voltage on "Standard list"	
	L.C	_	
	Temp.	+85°C	
	ΔC / C	Within +10/0%of initial value	_
	tanδ	Shall be satisfied the voltage on "Standard list"	_
	L.C	Less than 1000% of initial limit	
	Temp.	+125°C	
	ΔC / C	Within +15/0%of initial value	_
	tanδ	Shall be satisfied the voltage on "Standard list"	_
	L.C	Less than 1250% of initial limit	_
Surge Voltage	Appearance	There should be no significant abnormality. The indications should be clear.	As per 4.26 JIS C 5101-1 As per 4.14 JIS C 5101-3
	L.C	Less than initial limit	Apply the specified surge voltage via the serial
	ΔC / C	Within ±10%of initial value	 resistance of 1kΩ every 5±0.5min. for 30±5 s. each time in the atmospheric condition of 85±2°C. Repeat this procedure 1,000 times.
			After the specimens, leave it at room temperatu
	tanδ	Less than initial limit	for over 24h and then measure the sample.
Loading at High	Appearance	There should be no significant abnormality. The indications should be clear.	As per 4.23 JIS C 5101-1 As per 4.15 JIS C 5101-3
temperature	L.C	Less than initial limit	After applying the rated voltage for 2000+72/0 without discontinuation via the serial resistance
	ΔC / C	$\begin{array}{llllllllllllllllllllllllllllllllllll$	of 3Ω or less at a temperature of $85\pm2^{\circ}$ C, leave the sample at room temperature/humidity for over 24h and measure the value.
	tanδ	Less than initial limit	
Terminal	Capacitance	The measured value should be stable.	As per 4.35 JIS C 5101-1
Strength	Appearance	There should be no significant abnormality.	As per 4.9 JIS C 5101-3 A force is applied to the terminal until it bends to 1mm and by a prescribed tool maintain the condition for 5s. (See the figure below.) $50 \xrightarrow{20}$ F (Apply force) R230 + 1 Thickness 1.6mm
Adhesivene	955	The terminal should not come off.	As per 4.34 JIS C 5101-1 As per 4.8 JIS C 5101-3 Apply force of 5N in the two directions shown in the figure below for 10±1s after mounting the terminal on a circuit board.


lt	em	Performance	Test conditions (based on JIS C5101-1 and JIS C5101-3)			
Resistance to solvents The indication sl Solderability 3/4 or more surfactorial dipped		Be based on "External dimensions"	Measure using a caliper of JIS B 7505 Class 2 or higher grade.			
		The indication should be clear.	As per 4.32 JIS C 5101-1 As per 4.18 JIS C 5101-3 Dip in the isopropyl alcohol for 30±5s, at room temperature.			
		3/4 or more surface area of the solder coated terminal dipped in the soldering bath should be covered with the new solder.	As per 4.15.2 JIS C 5101-1 As per 4.7 JIS C 5101-3 Dip speed = 25±2.5mm/s Pre-treatment (accelerated aging) : Leave the sample on the boiling distilled water for 1h. Solder temp. : 245±5°C Duration : 3±0.5s Solder : M705 Flux : Rosin 25%, IPA 75%			
Vibration	Capacitance Appearance	The measured value should be stable. There should be no significant abnormality.	As per 4.17 JIS C 5101-1 Frequency : 10 to 55 to 10Hz/min. Amplitude : 1.5mm Time : 2h each in X and Y directions Mounting : The terminal is soldered on a print circuit board.			

•Standard list, TCFG series A Cases

Part No.	Rated Voltage @85°C	Derated Voltage @125°C (V)	Surge Voltage @85°C (V)	Capacitance 120Hz (µF)	Tolerance (%)	Leakage current 25°C 1WV.60s	D -55°C	F 120F (%) 25°C		Impedance 100kHz (Ω)	Case code
	(V)	. ,	. ,	. ,	. 00	(μA)		85°C		, <i>,</i>	
TCFG A 0G 475 M8R	4	2.5	5	4.7	±20	0.5	10	6	8	5.6	A
TCFG A 0G 685 M8R	4	2.5	5	6.8	±20	0.5	12	8	10	4.9	<u>A</u>
TCFG A 0G 106 M8R	4	2.5	5	10	±20	0.5	12	8	10	4.2	A
TCFG A 0G 156 M8R	4	2.5	5	15	±20	0.6	12	8	10	4.0	A
TCFG A 0G 226 M8R	4	2.5	5	22	±20	0.9	12	8	10	3.0	<u>A</u>
TCFG A 0G 336 M8R	4	2.5	5	33	±20	1.3	14	10	12	3.5	A
TCFG A 0G 476 M8R	4	2.5	5	47	±20	1.9	30	12	16	3.2	A
TCFG A 0G 686 M8R	4	2.5	5	68	±20	3.0	32	16	20	3.0	<u>A</u>
TCFG A 0J 335 M8R	6.3	4	8	3.3	±20	0.5	10	6	8	5.6	A
TCFG A 0J 475 M8R	6.3	4	8	4.7	±20	0.5	12	8	10	4.9	A
TCFG A 0J 685 M8R	6.3	4	8	6.8	±20	0.5	12	8	10	4.2	A
TCFG A 0J 106 M8R	6.3	4	8	10	±20	0.6	12	8	10	4.0	A
TCFG A 0J 156 M8R	6.3	4	8	15	±20	0.9	12	8	10	3.0	A
TCFG A 0J 226 M8R	6.3	4	8	22	±20	1.4	14	10	12	3.5	A
TCFG A 0J 336 M8R	6.3	4	8	33	±20	2.1	30	12	16	3.2	A
TCFG A 0J 476 M8R	6.3	4	8	47	±20	3.0	34	18	24	3.2	<u>A</u>
TCFG A 1A 155 M8R	10	6.3	13	1.5	±20	0.5	10	6	8	8.8	A
TCFG A 1A 225 M8R	10	6.3	13	2.2	±20	0.5	10	6	8	5.6	A
TCFG A 1A 335 M8R	10	6.3	13	3.3	±20	0.5	12	8	10	4.9	
TCFG A 1A 475 M8R	10	6.3	13	4.7	±20	0.5	12	8	10	4.2	
TCFG A 1A 685 M8R	10	6.3	13	6.8	±20	0.7	12	8	10	4.0	A
TCFG A 1A 106 M8R	10	6.3	13	10	±20	1.0	12	8	10	3.0	A
TCFG A 1A 156 M8R	10	6.3	13	15	±20	1.5	14	10	12	3.5	Α
TCFG A 1A 226 M8R	10	6.3	13	22	±20	2.2	30	12	16	3.2	Α
TCFG A 1C 105 M8R	16	10	20	1.0	±20	0.5	10	6	8	7	Α
TCFG A 1C 155 M8R	16	10	20	1.5	±20	0.5	10	6	8	5.6	Α
TCFG A 1C 225 M8R	16	10	20	2.2	±20	0.5	10	6	8	4.9	A
TCFG A 1C 335 M8R	16	10	20	3.3	±20	0.5	10	6	8	4.8	Α
TCFG A 1C 475 M8R	16	10	20	4.7	±20	0.8	10	6	8	3.9	A
TCFG A 1C 685 M8R	16	10	20	6.8	±20	1.1	10	6	8	3.8	A
TCFG A 1C 106 M8R	16	10	20	10	±20	1.6	12	8	10	3.5	A
TCFG A 1D 105 M8R	20	13	26	1.0	±20	0.5	10	6	8	7	A
TCFG A 1D 155 M8R	20	13	26	1.5	±20	0.5	10	6	8	6.0	A
TCFG A 1D 255 M8R	20	13	26	2.2	±20	0.5	10	6	8	5.2	A
TCFG A 1D 335 M8R	20	13	26	3.3	±20	0.7	10	6	8	4.8	A
TCFG A 1D 475 M8R	20	13	26	4.7	±20	0.9	10	6	8	3.9	Α
TCFG A 1E 105 M8R	25	16	32	1.0	±20	0.5	10	6	8	7	А
TCFG A 1E 155 M8R	25	16	32	1.5	±20	0.5	10	6	8	6.0	А
TCFG A 1E 255 M8R	25	16	32	2.2	±20	0.6	10	6	8	5.2	А
TCFG A 1E 335 M8R	25	16	32	3.3	±20	0.8	10	6	8	4.8	A
TCFG A 1E 475 M8R	25	16	32	4.7	±20	1.2	12	8	10	3.4	А


•Packaging specifications

Case code	A±0.1	B±0.1	t1±0.05	t2±0.1
A (3216)	1.9	3.5	0.25	1.9

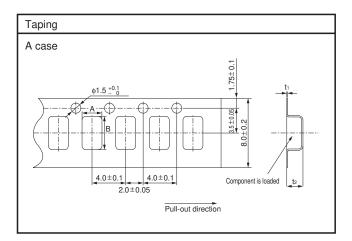

Packaging style

Case code	Packaging	Packagi	ing style	Symbol	Basic ordering unit
A Case	Taping	Plastic taping	φ180mm reel	8R	2,000



No copying	or reproduction of this document, in part or in whole, is permitted without the
consent of F	ROHM Co.,Ltd.
The content	specified herein is subject to change for improvement without notice.
"Products").	specified herein is for the purpose of introducing ROHM's products (hereinafter If you wish to use any such Product, please be sure to refer to the specifications e obtained from ROHM upon request.
illustrate the	f application circuits, circuit constants and any other information contained herein e standard usage and operations of the Products. The peripheral conditions mus o account when designing circuits for mass production.
However, sl	was taken in ensuring the accuracy of the information specified in this document nould you incur any damage arising from any inaccuracy or misprint of sucl ROHM shall bear no responsibility for such damage.
examples o implicitly, ar other partie	al information specified herein is intended only to show the typical functions of and f application circuits for the Products. ROHM does not grant you, explicitly on y license to use or exercise intellectual property or other rights held by ROHM and s. ROHM shall bear no responsibility whatsoever for any dispute arising from the technical information.
equipment of	ts specified in this document are intended to be used with general-use electroni- or devices (such as audio visual equipment, office-automation equipment, commu rices, electronic appliances and amusement devices).
The Product	ts specified in this document are not designed to be radiation tolerant.
	If always makes efforts to enhance the quality and reliability of its Products, a y fail or malfunction for a variety of reasons.
against the failure of an shall bear n	ure to implement in your equipment using the Products safety measures to guard possibility of physical injury, fire or any other damage caused in the event of the y Product, such as derating, redundancy, fire control and fail-safe designs. ROHN o responsibility whatsoever for your use of any Product outside of the prescribed t in accordance with the instruction manual.
system which may result i instrument, controller or of the Produ	ts are not designed or manufactured to be used with any equipment, device or ch requires an extremely high level of reliability the failure or malfunction of which in a direct threat to human life or create a risk of human injury (such as a medica transportation equipment, aerospace machinery, nuclear-reactor controller, fuel- r other safety device). ROHM shall bear no responsibility in any way for use of an ucts for the above special purposes. If a Product is intended to be used for an I purpose, please contact a ROHM sales representative before purchasing.
be controlle	d to export or ship overseas any Product or technology specified herein that ma d under the Foreign Exchange and the Foreign Trade Law, you will be required to onse or permit under the Law.



Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/

