

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









DESCRIPTION

The TLP321, TLP321-2 and TLP321-4 series of optically coupled isolator consist of an infrared light emitting diode and an NPN silicon photo transistor in a space efficient Dual In Line Plastic Package.

TLP321




FEATURES

- AC Isolation Voltage 5300V_{RMS}
- CTR Selections Available
- Wide Operating Temperature Range -30°C to +100°C
- Lead Free and RoHS Compliant
- UL File E91231 Package Code "EE"
- VDE Approval Certificate No. 40028086

TLP321-2



TLP321-4



APPLICATIONS

- **Computer Terminals**
- **Industrial System Controllers**
- Measuring Instruments
- Signal Transmission between Systems of Different Potentials and Impedances

ORDER INFORMATION

- Add X after PN for VDE Approval
- Add G after PN for 10mm lead spacing
- Add SM after PN for Surface Mount
- Add SMT&R after PN for Surface Mount Tape & Reel (Available for TLP321SM and TLP321-2SM)

Consult Factory for Tape and Reel version of TLP321-4SM

ABSOLUTE MAXIMUM RATINGS $(T_A = 25^{\circ}C)$

Stresses exceeding the absolute maximum ratings can cause permanent damage to the device.

Exposure to absolute maximum ratings for long periods of time can adversely affect reliability.

Input

Forward Current	50mA
Reverse Voltage	6V
Power dissipation	70mW

Output

Collector to Emitter Voltage BV _{CEO}	80V
Emitter to Collector Voltage BV _{ECO}	6V
Collector Current	50mA
Power Dissipation	150mW

Total Package

Isolation Voltage	5300V _{RMS}
Total Power Dissipation	200mW
Operating Temperature	-30 to 100 °C
Storage Temperature	-55 to 125 °C
Lead Soldering Temperature	260°C

(10s)

ISOCOM COMPONENTS 2004 LTD

Unit 25B, Park View Road West, Park View Industrial Estate Hartlepool, Cleveland, TS25 1PE, United Kingdom Tel: +44 (0)1429 863 609 Fax: +44 (0)1429 863 581 e-mail: sales@isocom.co.uk

http://www.isocom.com

ISOCOM COMPONENTS ASIA LTD

Hong Kong Office Block A, 8/F, Wah Hing Industrial Mansion 36 Tai Yau Street, San Po Kong, Kowloon, Hong Kong Tel: +852 2995 9217 Fax: +852 8161 6292 e-mail: sales@isocom.com.hk



ELECTRICAL CHARACTERISTICS (Ambient Temperature = 25°C unless otherwise specified)

INPUT

Parameter	Symbol	Test Condition	Min	Тур.	Max	Unit
Forward Voltage	V_{F}	$I_F = 10 \text{mA}$	1.0	1.15	1.3	V
Reverse Voltage	V_R	$I_R = 10\mu A$	5.0			V
Reverse Leakage	I_R	$V_R = 5V$			10	μΑ
Terminal Capacitance	C_{t}	V = 0V, $f = 1KHz$		30	250	pF

OUTPUT

Parameter	Symbol	Test Condition	Min	Тур.	Max	Unit
Collector—Emitter breakdown Voltage	BV_{CEO}	$I_C = 0.5 \text{mA}, I_F = 0 \text{mA}$	80			V
Emitter—Collector breakdown Voltage	$\mathrm{BV}_{\mathrm{ECO}}$	$I_E = 100 \mu A, I_F = 0 mA$	6			V
Collector-Emitter Dark Current	I_{CEO}	$V_{CE} = 48V$, $I_F = 0mA$			100	nA



ELECTRICAL CHARACTERISTICS (Ambient Temperature = 25°C unless otherwise specified)

COUPLED

Parameter	Symbol	Test Condition	Min	Тур.	Max	Unit
Current Transfer Ratio	CTR	$I_F = 5 \text{mA}, V_{CE} = 5 \text{V}$	50		600	%
		Optional CTR Grades BL GB GB ($I_F = 1 \text{ mA}, V_{CE} = 0.4 \text{V}$)	200 100 30		600 600	
Collector—Emitter Saturation Voltage	V _{CE(sat)}	$I_F = 8mA, I_C = 2.4mA$ GB ($I_F = 1mA, I_C = 0.2mA$)			0.4 0.4	V
Output Rise Time	$t_{\rm r}$	$V_{CE} = 10V$, Ic = 2mA,		2		μs
Output Fall Time	t_{f}	$R_{\rm L} = 100\Omega$		3		
Turn-on Time	t _{on}			3		
Turn-off Time	$t_{ m off}$			3		

ISOLATION

Parameter	Symbol	Test Condition	Min	Тур.	Max	Unit
Input to Output Isolation Voltage	$V_{\rm ISO}$	AC 1 minute, RH = 40 to 60% Note 1	5300			V_{RMS}
Input to Output Isolation Resistance	$R_{\rm ISO}$	V _{IO} = 500V Note 1	5x10 ¹⁰			Ω

Note 1: Measure with input leads shorted together and output leads shorted together.






Fig 1 Forward Current vs T_A

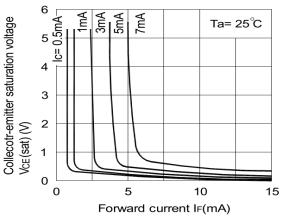


Fig 3 Collector-emitter Saturation Voltage vs Forward Current




Fig 5 Current Transfer Ratio vs Forward Current




Fig 2 Collector Power Dissipation vs T_A




Fig 4 Collector Current vs Collector-emitter Voltage




Fig 6 Forward Current vs Forward Voltage






Fig 7 Relative CTR vs T_A




Fig 9 Response Time vs Load Resistance





Fig 8 Frequency Response



Response Time Test Circuit

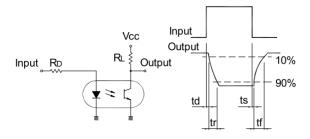

ORDER INFORMATION

	TLP321 (UL Approval)					
After PN	PN	Description	Packing quantity			
None	TLP321, TLP321BL, TLP321GB	Standard DIP4	100 pcs per tube			
G	TLP321G, TLP321BLG, TLP321GBG	10mm Lead Spacing	100 pcs per tube			
SM	TLP321SM, TLP321BLSM, TLP321GBSM	Surface Mount	100 pcs per tube			
SMT&R	TLP321SMT&R, TLP321BLSMT&R, TLP321GBSMT&R	Surface Mount Tape & Reel	1000 pcs per reel			

	TLP321-2 (UL Approval)					
After PN	PN	Description	Packing quantity			
None	TLP321-2, TLP321-2BL, TLP321-2GB	Standard DIP8	50 pcs per tube			
G	TLP321-2G, TLP321-2BLG, TLP321-2GBG	10mm Lead Spacing	50 pcs per tube			
SM	TLP321-2SM, TLP321-2BLSM, TLP321-2GBSM	Surface Mount	50 pcs per tube			
SMT&R	TLP321-2SMT&R, TLP321-2BLSMT&R, TLP321-2GBSMT&R	Surface Mount Tape & Reel	1000 pcs per reel			

	TLP321-4 (UL Approval)					
After PN	PN	Description	Packing quantity			
None	TLP321-4, TLP321-4BL, TLP321-4GB	Standard DIP16	25 pcs per tube			
G	TLP321-4G, TLP321-4BLG, TLP321-4GBG	10mm Lead Spacing	25 pcs per tube			
SM	TLP321-4SM, TLP321-4BLSM, TLP321-4GBSM	Surface Mount	25 pcs per tube			



ORDER INFORMATION

	TLP321X (UL and VDE Approvals)					
After PN	PN	Description	Packing quantity			
None	TLP321X, TLP321XBL, TLP321XGB	Standard DIP4	100 pcs per tube			
G	TLP321XG, TLP321XBLG, TLP321XGBG	10mm Lead Spacing	100 pcs per tube			
SM	TLP321XSM, TLP321XBLSM, TLP321XGBSM	Surface Mount	100 pcs per tube			
SMT&R	TLP321XSMT&R, TLP321XBLSMT&R, TLP321XGBXSMT&R	Surface Mount Tape & Reel	1000 pcs per reel			

TLP321-2X (UL and VDE Approvals)					
After PN	PN	Description	Packing quantity		
None	TLP321-2X, TLP321-2XBL, TLP321-2XGB	Standard DIP8	50 pcs per tube		
G	TLP321-2XG, TLP321-2XBLG, TLP321-2XGBG	10mm Lead Spacing	50 pcs per tube		
SM	TLP321-2XSM, TLP321-2XBLSM, TLP321-2XGBSM	Surface Mount	50 pcs per tube		
SMT&R	TLP321-2XSMT&R, TLP321-2XBLSMT&R, TLP321-2XGBSMT&R	Surface Mount Tape & Reel	1000 pcs per reel		


TLP321-4X (UL and VDE Approvals)				
After PN	PN	Description	Packing quantity	
None	TLP321-4X, TLP321-4XBL, TLP321-4XGB	Standard DIP16	25 pcs per tube	
G	TLP321-4XG, TLP321-4XBLG, TLP321-4XGBG	10mm Lead Spacing	25 pcs per tube	
SM	TLP321-4XSM, TLP321-4XBLSM, TLP321-4XGBSM	Surface Mount	25 pcs per tube	




PACKAGE DIMENSIONS in mm (inch)

DIP







TLP321-2




97 (72 97) (72



TLP321-4



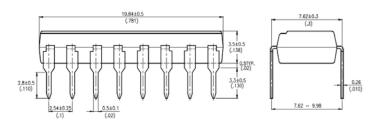





PACKAGE DIMENSIONS in mm (inch)


G Form


TLP321G







TLP321-2G





TLP321-4G









PACKAGE DIMENSIONS in mm (inch)


SMD


TLP321SM







TLP321-2SM






TLP321-4SM











RECOMMENDED PAD LAYOUT FOR SMD (mm)






TLP321-2SM




TLP321-4SM

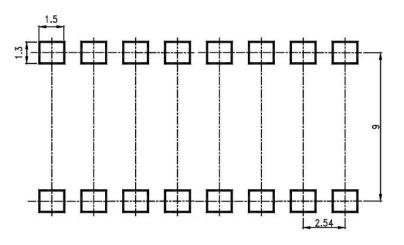




TAPE AND REEL PACKAGING

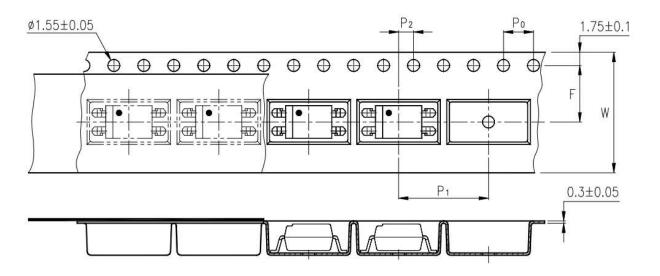

TLP321SMT&R

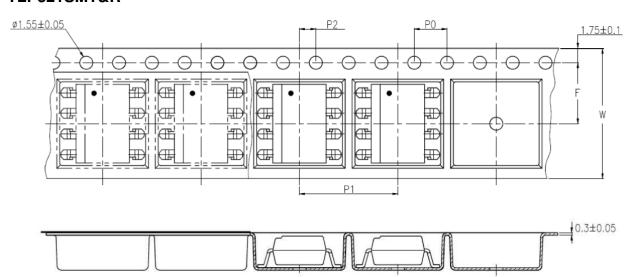


TLP321-2SMT&R

Description	Symbol	Dimensions in mm (inches)
Tape wide	W	$16 \pm 0.3 \ (.63)$
Pitch of sprocket holes	P ₀	4 ± 0.1 (.15)
Distance of commentment	F	$7.5 \pm 0.1 (.295)$
Distance of compartment	P ₂	$2 \pm 0.1 (.079)$
Distance of compartment to compartment	P ₁	$12 \pm 0.1 (.472)$



IR REFLOW SOLDERING TEMPERATURE PROFILE FOR SMD (One Time Reflow Soldering is Recommended)

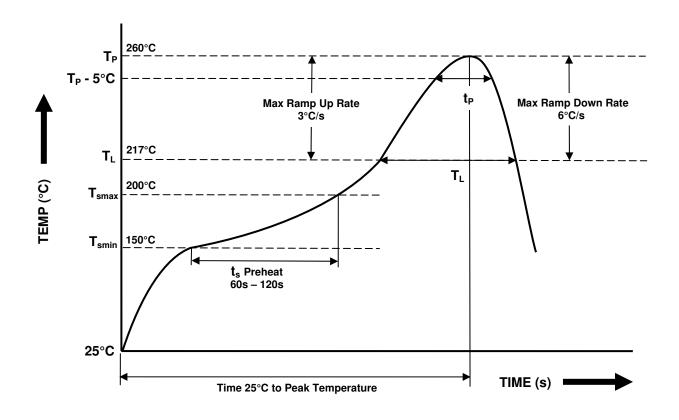

Profile Details	Conditions
Preheat - Min Temperature (T _{SMIN}) - Max Temperature (T _{SMAX}) - Time T _{SMIN} to T _{SMAX} (t _s)	150°C 200°C 60s - 120s
$\begin{tabular}{lll} \textbf{Soldering Zone} \\ - & \begin{tabular}{l} - $	260°C 10s max 217°C 30s max 60s - 100s 3°C/s max 6°C/s max
Average Ramp Up Rate (T _{smax} to T _P)	3°C/s max
Time 25°C to Peak Temperature	8 minutes max



NOTES:

- Isocom is continually improving the quality, reliability, function or design and Isocom reserves the right to make changes without further notices.
- The products shown in this publication are designed for the general use in electronic applications such as office automation equipment, communications devices, audio/visual equipment, electrical application and instrumentation.
- For equipment/application where high reliability or safety is required, such as space applications, nuclear power control equipment, medical equipment, etc., please contact our sales representatives.
- When requiring a device for any "specific" application, please contact our sales for advice.
- The contents described herein are subject to change without prior notice.
- Do not immerse device body in solder paste.



DISCLAIMER

___ISOCOM is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing ISOCOM products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such ISOCOM products could cause loss of human life, bodily injury or damage to property.

In developing your designs, please ensure that ISOCOM products are used within specified operating ranges as set forth in the most recent ISOCOM products specifications.

__ The ISOCOM products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These ISOCOM products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation Instruments, traffic signal instruments, combustion control instruments, medical Instruments, all types of safety devices, etc.. Unintended Usage of ISOCOM products listed in this document shall be made at the customer's own risk.

__ Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.

__ The products described in this document are subject to the foreign exchange and foreign trade laws.

___ The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by ISOCOM Components for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of ISOCOM Components or others.

The information contained herein is subject to change without notice.